


NOVA LUCE



Technical Collection
2025



DOWNLIGHTS

10----157

ONE & MINIONE

MiniOne S	MiniOne M	MiniOne L	One S	One M	One L	MiniOne Wallwasher	MiniOne Special Lenses
							
18-19	20-21	22-23	24-25	26-27	28-29	30	31

RECESSED

Loggia	Tiny	Elvi	Lucy	Ado	Dustproof	Cyta	Tif Lens
							
34	35	36	37	37	38	38	39

Ambry	Delve	Selene	Praet	Dash	Glade	Thiny	Doue
							
39	40	41	42	43	44	45	46-47

Otto Lens	Hollow	Lonza	Talus	Cirrus	Oblivion	Blade	Germin
							
48-49	50	51	52-53	54-55	56-57	58-59	60

Candry	Baculus	Duran	Uho	Glyce	Feller	Bree	Sanco
							
61	62	63	64-65	66	67	68	70-71

Ono	Petit	Style	Luela	Homer	Brady	Carpo	Helio
							
72	73	74	75	76-79	80	81	82

SEMI-RECESSED

Hue	Desert	Zetan	Clarity	Cod	Otium	Cortis	Pulse
							
86	88	89	90	91	92	94	95

LINEAR

Pin	Juno	Naruto
		
96	96	97

Stealth	Gono	Sorel	Swan	Area	Canon	Akira	Cantia
							
100-101	102-103	104	104	105	106-107	108	109

GU10

Spezia	Cadmo	Mea	Brad	Inlet	Kido	Moal	Carree
							
112-113	114	115	117	117	118	118	118

Hap	Punk	Stardust	Contra	Crib	Texture	Redo	Enzo
							
118	119	119	119	120	120	121	121

Take	Rende	Cedi	Eiriam	Varo	Enzo	Boli	Certa
							
121	122	123	124	125	125	126	126

Quad	Brook	Tex	Doherty	Antalya	Ceid
					
126	126-127	128	128	128	129

GYPSUM

Lvric	Mib	Cosimo	Tobia	Gol	Inset	Crate	Vitale
							
130	131	132	133	134	135	136	137

COMMERCIAL

Oblio	Radius	Spark	Glim	Vulcan	Vessel	Lox	Fati
							
142-143	144	145	146	147	148	149	150

CEILING

LED

GU10

INDEX

Dine	Urby	Hermit	Perfect	Led Panel
				
151	152	153	154-155	156-157

140----187

Datum	Largo	Jax	Luisa	Etho	Doc	Roller	Sero
							
162-163	164	165	167	167	168	169	170
Garf	Iris	Aneto	Ziaza	Anello	Cannos	Nano	Pablo
							
170	171	171	172	172	173	173	174
Spectre	Colosio	Miniair	Boston	Akro	Universal	Lot	Cotto
							
175	176	176	177	177	178	179	179
Emira	Perfect	Halo	Perfect	Cerium	Binary	Mire	
							
180	181	182-183	184-185	186-188	188	189	
Mor	Comet	Conza	Mare	Mnia	Mao	Gener	Sirius
							
192	192	192	192	193	193	193	193
Boston	Loyd	Picto	Marupe	Esca	Nessi	Imax	Oslo
							
194	194	194	194	195	195	195	195

INDEX

GYPSUM

LOW VOLTAGE TRACKS

LIGHTING SYSTEMS

Robin	Ned	Aval	Goni	Cotty	Gozzano	San	Ulty
							
196	196	196	197	197	197	197	198
Nido	Monique	Nido	Rende	Cubi	Rende	Nami	Thomas
							
198	198	199	199	199	200	200	200
Orazio	Pelia	Aku					
							
201	201	201					

AGE TRACKS

204----303

Minimal	Ultra Slim	Planet	5mm	Shallow	Flat	Breda	Buxton
							
204-217	218-229	230-241	242-251	252-261	260-271	270-285	286-301

SYSTEMS

304----367

Uprail	Chroma	Symmetric	Glow	Imagine	Imagine 2
					
304-313	314-323	324-335	336-345	346-357	358-365

LINEAR LIGHTING

366----379

Gent



368-371

Lina



372-377

Smart Lina



378-379

HIGH VOLTAGE TRACKS

380----393

4 WIRES TRACK

Tracks



384

Lavish



384

Kors



385

Monvel



385

West



386

Herm



386

Eurika



387

Wang



388

2 WIRES TRACK

Kamala



388

Roler



389

Paris



390

Pongo



390

Thomas



391

Tracks



392

Flix



393

Sint



393

Diss



393

FLOOR LAMPS


394----401

Biolight



396-397

Reader



400-401, 401

Gal



400

STEPLIGHTS

402----421

STEPLIGHTS

Bang



406-407

Passaggio



408

Natal



409

Atrium



409-411

Cirocco



413

Eurona



414-415

Cirocco



416-417

INGROUND

Bang



418-419

Geli



420

Codi



420

Kem



421

FAÇADE & ACCENT LIGHTING

422----437

FAÇADE

Dusty



426-427

Narrow



428-429

Wall Washer



430-431

ACCENT

Dio



432

Rabit



433

Tree



434

Ander



435

Law InOut



436

Stal



437

Sento



437

INDUSTRIAL, EMERGENCY & STREET LIGHTS

438----457

INDUSTRIAL

Umbler



442

Linear HB



443

Grotto



444

Titan



445

Dirpno



446

Cosio



447

Darma



447

	INDEX							
STREET LIGHTS	Tano	Zeva	Lattern					
								
	450	450	451					
EMERGENCY	El101	El102	El501	El502	El301	El401	El201	El202
								
	454	454	455	455	456	456	456	457
	Elpack							
								
	457							

LED STRIPS & NEON FLEX

458----521

ARCHITECTURE NEON FLEX






Gomu 16x17	Kema 16x16	Gomu 16x15	Kema 10x18	Gomu 12x20	Gomu 10x10	Kema 8x8	Kema 6x6
							
468	470	471	472	473	474	475	476



Kema 4x10	Kema R18	Kema R23
		
476	477	477

UNDERWATER

Gomu 16x17	Kema 16x16	Kema 20x18	Gomu 16x15	Kema 10x18	Kema 12x20	Gomu 12x20
						
480	482	482	483	484	484	485

COB / SMD

Solid	Ten	Vida	Goro	Goro Cob RGBW	Vida Slim	Honor Slim	Vida Ultra Slim
							
488	489	490	491	492	494	495	496

INDEX				
Honor Slim Plus	Aktis Plus	Como HE	Perfomance HE	Free HE
				
501	502	504	505	506
D2W	TW			
				
510	511			
Controllers Connectors				
				
520	521			

DRIVERS & ACCESSORIES

522----537

ACCESSORIES

IP68 Connectors

524-525

DRIVERS

CC Led Drivers	Casambi Controllers
	
526-537	537



DOWNLIGHTS

10----157

Pages

Our downlight range provides a comprehensive lighting solution, featuring **recessed downlights**, the modular **One and MiniOne series**, **linear downlights**, **semi-recessed**, and **commercial downlights** to cover a wide spectrum of applications. To meet varying project requirements and budgets, the entire range is offered in **two series: PRO**, for high-performance, feature-rich solutions, and **Essential**, for reliable, cost-effective options without sacrificing quality.

ONE & MINIONE	Page 10-31
RECESSED	Page 32-83
SEMI-RECESSED	Page 84-97
LINEAR	Page 98-108
GU10	Page 110-137
COMMERCIAL	Page 138-157

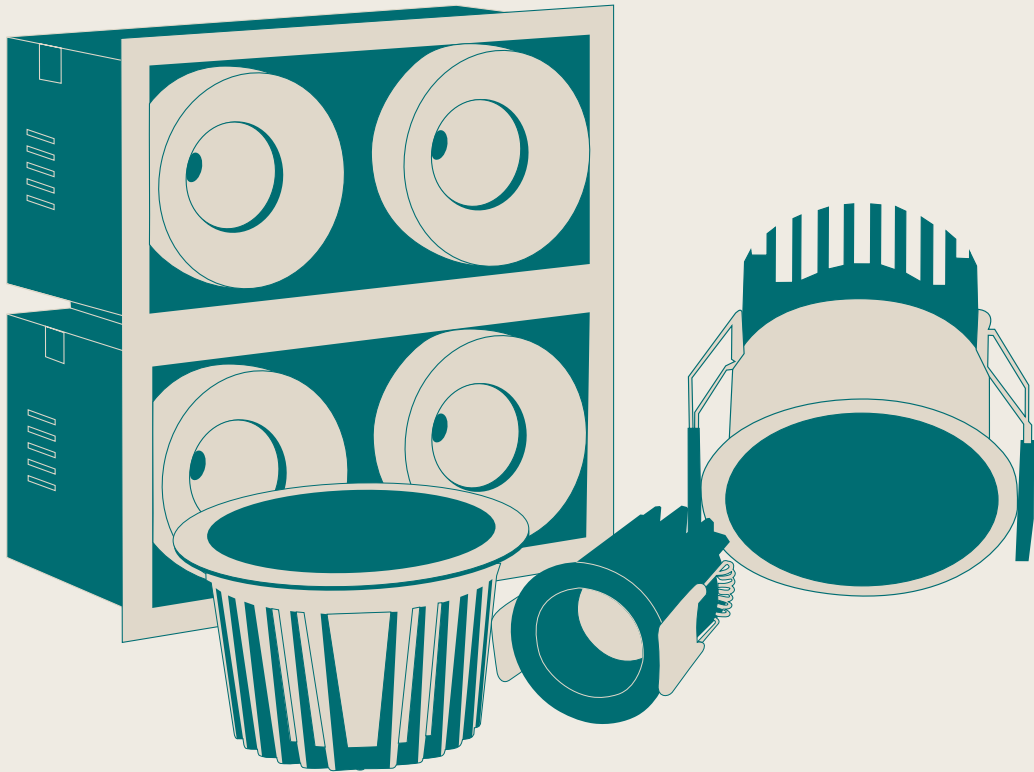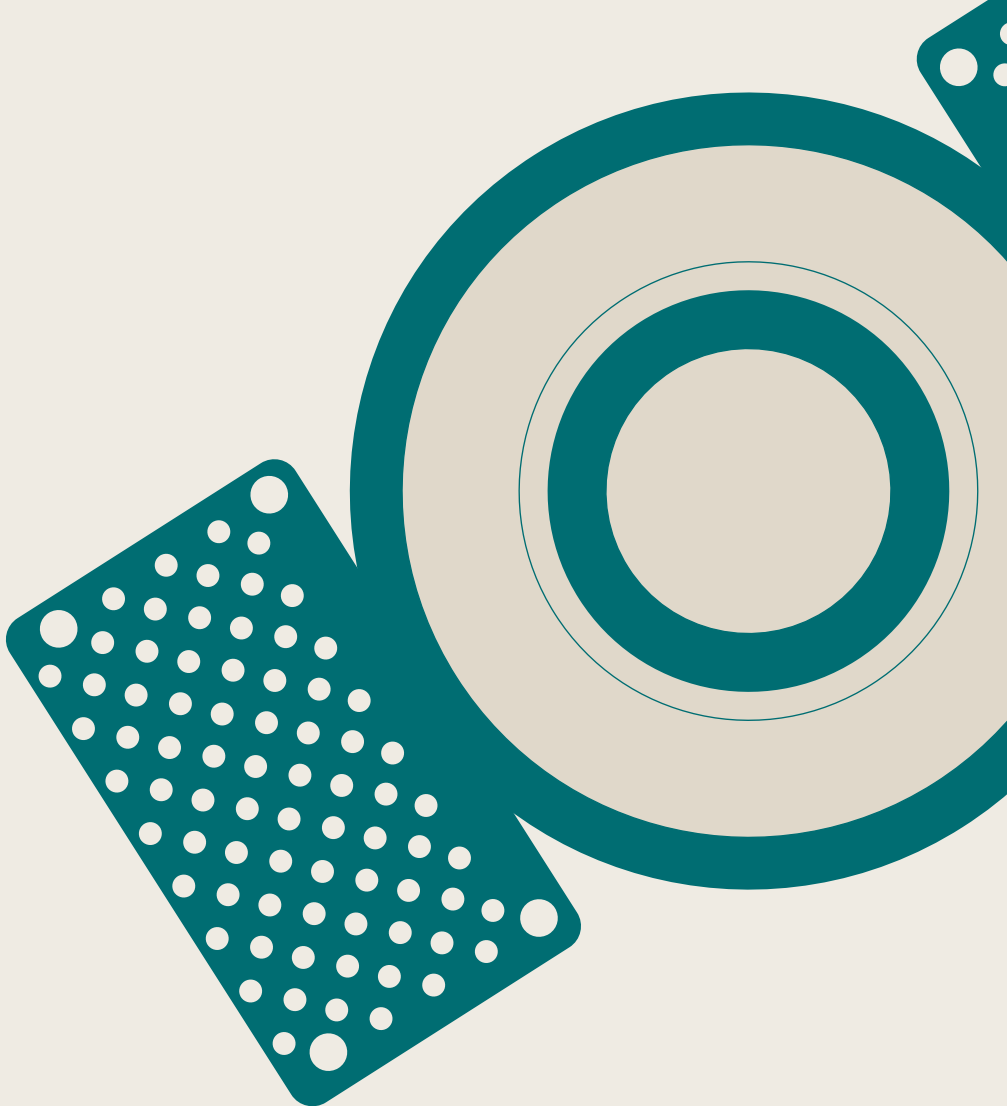



ONE & MINIONE
DOWNLIGHTS

ONE DOWNLIGHT - INFINITE APPLICATIONS Introducing our next-generation **modular downlight series**, engineered and assembled in-house to deliver unparalleled flexibility, performance, and design precision. Available in two distinct versions — the "**One**" and the compact "**MiniOne**" — this system redefines architectural lighting with **high efficiency outputs of up to 130 lm/W** in the final product. Designed for versatility, it offers a **broad range of trim color combinations, multiple Cut-Out sizes (from 25mm to 75mm)**, and both **adjustable and fixed configurations** to suit diverse installation needs. With **IP54 protection options, UGR<17** and **Darklight technology** for the standard version, and innovative **with special lens versions**, this modular solution brings performance and aesthetics together seamlessly — making it the ideal choice for refined, modern interiors.




Variety

ONE and MiniOne range is available in a wattage options from 6W to 20W, making it adaptable for both low and high lumen requirements. Combined with a variety of sizes, this flexibility allows for tailored lighting solutions across different project scales—from compact residential spaces to expansive commercial environments. Available in both **trim and trimless versions**, the range includes **adjustable, fixed, and gible configurations**, as well as multiple aesthetic options such as **pinhole, square, and oval-shaped versions**, ensuring seamless integration into any architectural design.




Easy Installation & Access

Designed for easy installation and long-term maintenance. The system allows for quick and tool-free replacement of the LED module or driver, ensuring minimal downtime and reduced maintenance costs. This user-friendly design makes it ideal for both new installations and retrofit projects, combining efficiency, convenience, and service ability in one solution.

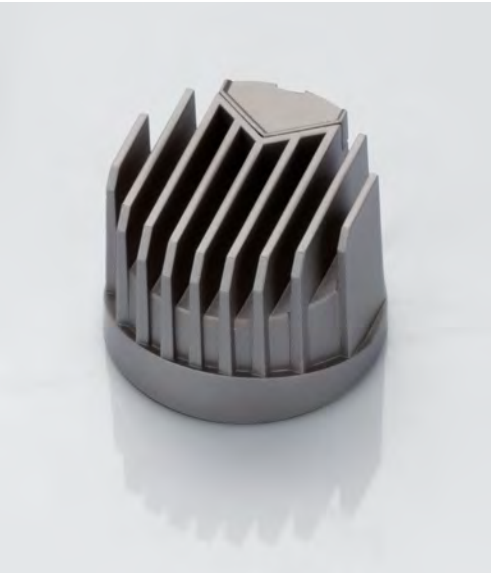

High Efficacy Design

Our modular downlight series is powered by the latest Bridgelux chip, delivering market-leading efficiency with an impressive **179 lm/W at the light source and up to 130 lm/W in the final product**. Designed for premium performance and visual comfort, the range includes options with Darklight technology, ensuring low glare and precise beam control. With **SDCM <2 and <3** versions available, color consistency is guaranteed across installations. The series also offers advanced lighting experiences through Dim to Warm and Tunable White options, adapting seamlessly to changing atmospheres. Thanks to its specially engineered heatsink design and the LED chip, the downlight achieves L80B10 standards for **50,000 hours**, ensuring exceptional longevity, thermal performance, and reliable operation throughout its lifespan.

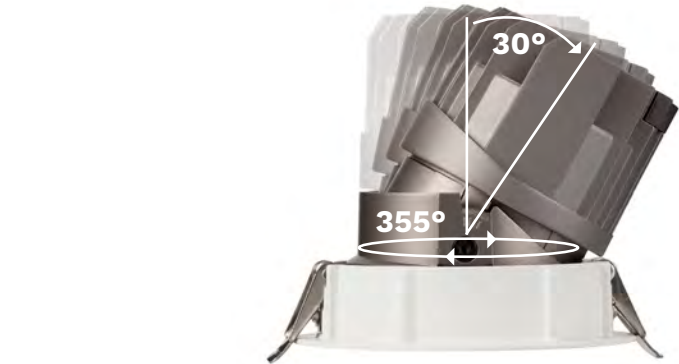

Precise Light adjustment

The modular downlight offers enhanced flexibility with **horizontal rotation up to 355° and vertical tilting up to 30°**, allowing precise directional lighting to suit any application or layout.

Colors & Pinholes Variety

ONE and **MiniOne** offer a wide variety of **trim and inner trim colors** beyond the standard black and white — perfect for blending with or accenting any interior. Customers can choose between **fully aluminum trims** for a sleek, uniform look or **aluminum trims combined with PC inner trims**, both available in a diverse range of colors to complement different textures, finishes, and design aesthetics. **For MiniOne all aluminium trims can be provided in several colors.**




MiniOne



MiniOne is designed for flexibility and precision, offering **Cut-Out options from 25mm to 55mm** to suit various installation needs. Available in a **wide variety of colors and trim styles**, the series includes both **adjustable and fixed versions**, along with an **IP54-rated option** for added protection. With **four distinct beam angles** across **three interchangeable lighting modules**, this downlight system delivers tailored lighting solutions for a wide range of architectural applications.


One

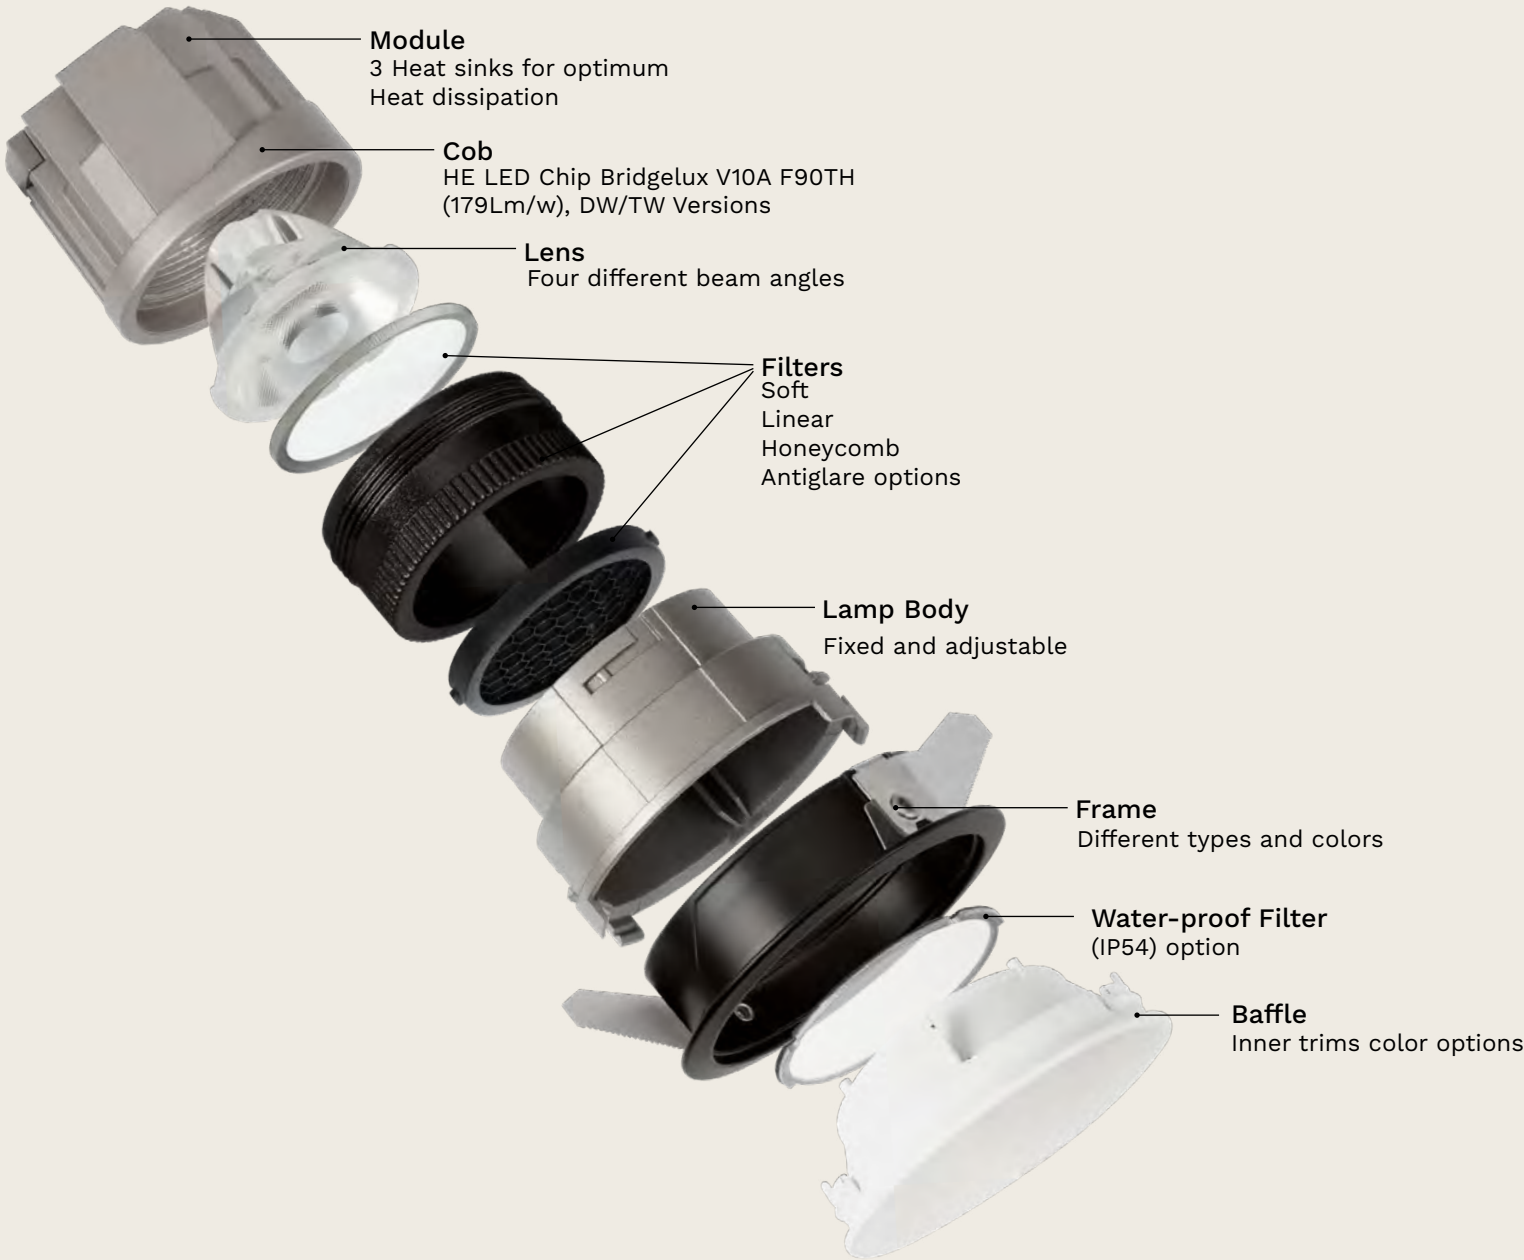

One delivers exceptional performance with a **179 lm/W LED chip** and up to **130 lm/W in the final product**, ensuring powerful yet energy-efficient illumination. Designed for **Cut-Outs from 65 to 75mm**, it is available in both **adjustable and fixed versions**, with advanced options including **Dim to Warm** and **Tunable White** for dynamic lighting control. Offering **four different beam angles**, as well as **linear or soft filter optics**, the range also includes a variety of **trim and inner trim color** options to suit diverse design needs and architectural styles.

MiniOne S

FIXED
WITH TRIM

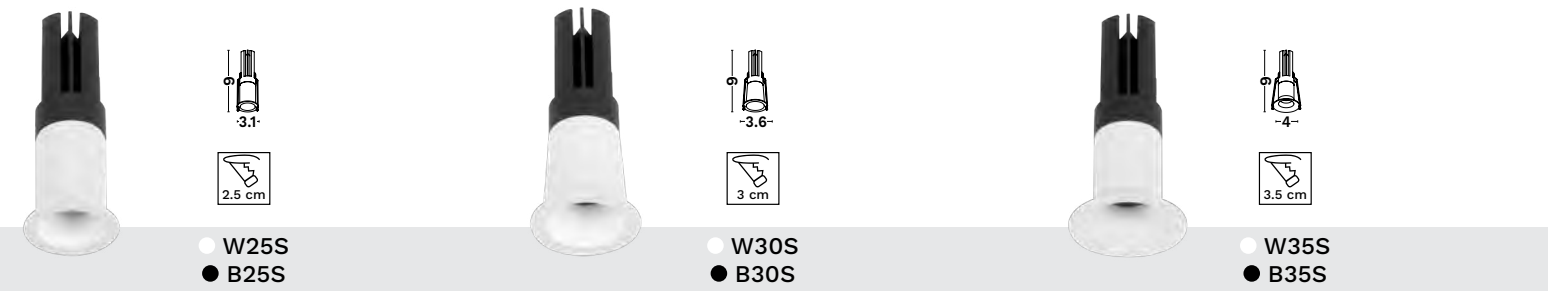

ADJUSTABLE
WITH TRIM



FIXED
TRIMLESS



Color Options



*Color options available upon special request. **Delivery times may** vary depending on availability and order specifications.

Upon Special Request*

Filters



Trimless Drilling Accessory

CODE	DIMENSIONS (mm)
9090093	D30 x D55 x 3



Technical Specification

WATT	CCT	FLUX	I _{out}	VOLTAGE
6	2700K	360 lm	150 mA	36Vdc
6	3000K	380 lm	150 mA	36Vdc
6	4000K	440 lm	150 mA	36Vdc




Code

M	X	-	XX	-	XXX(X)	-	XX	-	X(X)
Wattage			CCT		Trims		Lenses		Filters
6			27 – 2700K 30 – 3000K 40 – 4000K		W25S – White Trim Cut-Out 25 B25S – Black Trim Cut-Out 25 W30S – White Trim Cut-Out 30 B30S – Black Trim Cut-Out 30 W35S – White Trim Cut-Out 35 B35S – Black Trim Cut-Out 35 W40AS – White Trim Cut-Out 40 Adj. B40AS – Black Trim Cut-Out 40 Adj. W35TS – White Trim Cut-Out 30 Trimless		24 – 24° 36 – 36° 45 – 45°		N – No Filter H – Honeycomb 54 – IP54 Filter
Dim Options On/Off 9540265 Triac 9844008 (remote) DALI 9844146									

Example
M6-27-W35TS-36-N DALI

MiniOne M


FIXED
WITH TRIM



● W35M
● B35M




● W40M
● B40M




● W45M
● B45M

ADJUSTABLE
WITH TRIM



● W50AM
● B50AM

FIXED
TRIMLESS



● W40TM

Color Options



White



Matt Black



Foggy Nickel



Chrome Black



Chrome Silver



Silver



Bronze



Champagne Gold



Gold

*Color options available upon special request. **Delivery times may** vary depending on availability and order specifications.

Filters



Honeycomb



IP54

Trimless Drilling Accessory

CODE	DIMENSIONS (mm)
9090094	D40 x D70 x 3



Technical Specification

WATT	CCT	FLUX	I _{out}	VOLTAGE
8	2700K	700 lm	200 mA	36Vdc
8	3000K	730 lm	200 mA	36Vdc
8	4000K	780 lm	200 mA	36Vdc



Code

M - **XX** - **XXX(X)** - **XX** - **X(X)**

Wattage
8

CCT
27 - 2700K
30 - 3000K
40 - 4000K

Trims
W35M - White Trim Cut-Out 35
B35M - Black Trim Cut-Out 35
W40M - White Trim Cut-Out 40
B40M - Black Trim Cut-Out 40
W45M - White Trim Cut-Out 45
B45M - Black Trim Cut-Out 45
W50AM - White Trim Cut-Out 50 Adj.
B50AM - Black Trim Cut-Out 50 Adj.
W40TM - White Trim Cut-Out 40 Trimless

Lenses
24 - 24°
40 - 40°
55 - 55°

Filters
N - No Filter
H - Honeycomb
54 - IP54 Filter

Dim Options
On/Off 9540266
Triac 9844008 (remote)
Dali 9621523

Example
M8-30-B45M-24-H TRIAC

MiniOne L

FIXED
WITH TRIM

● W45L
● B45L

● W50L
● B50L

● W55L
● B55L

FIXED
TRIMLESS

● W50TL

Color Options

White

Matt Black

Foggy Nickel

Chrome Black

Chrome Silver

Silver

Bronze

Champagne Gold

Gold

*Color options available upon special request. **Delivery times may** vary depending on availability and order specifications.

Upon Special Request*

Filters

Honeycomb

IP54

Trimless Drilling Accessory

CODE	DIMENSIONS (mm)
9090095	D50 x D80 x 3



Technical Specification

WATT	CCT	FLUX	I _{out}	VOLTAGE
12	2700K	1100 lm	300 mA	36Vdc
12	3000K	1120 lm	300 mA	36Vdc
12	4000K	1180 lm	300 mA	36Vdc

Code

MXX -

Wattage
12

XX -

CCT
27 - 2700K
30 - 3000K
40 - 4000K

XXX(X) -

Trims
W45L - White Trim Cut-Out 45
B45L - Black Trim Cut-Out 45
W50L - White Trim Cut-Out 50
B50L - Black Trim Cut-Out 50
W55L - White Trim Cut-Out 55
B55L - Black Trim Cut-Out 55
W50TL - White Trim Cut-Out 40 Trimless

XX -

Lenses
15 - 15°
24 - 24°
36 - 36°
55 - 55°

X(X)

Filters
N - No Filter
H - Honeycomb
54 - IP54 Filter

Dim Options
On/Off 9030969
Triac 9844008 (remote)
Dali 9621523

Example
M12-40-W45L-15-54 ON/OFF

One S

WITH TRIM




Fully Aluminium Trims
(including inner trim)




Inner Trims



TRIMLESS

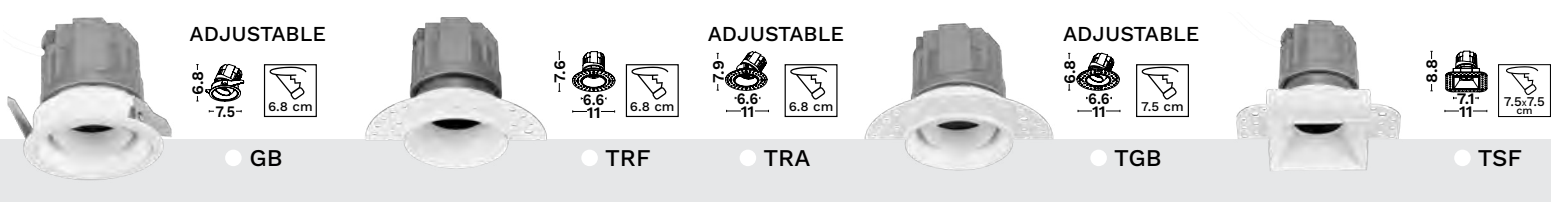

Pinholes



Filters



Trimless Drilling Accessory

CODE	DIMENSIONS (mm)	
9090096	D70 x D115 x 3	

Technical Specification

WATT	CCT	FLUX	I _{out}	VOLTAGE
6 / 10	2700K	730 / 1113Lm	150 / 220 mA	36Vdc
6 / 10	3000K	742 / 1144Lm	150 / 220 mA	36Vdc
6 / 10	4000K	778 / 1186Lm*	150 / 220 mA	36Vdc
10	1800K - 3000K	600Lm	180 mA	36Vdc
10	2700K - 5700K	662Lm	180 mA	36Vdc



*For complete product using chrome silver inner trim

Code

X(X)	XX(X)	XX(X)	-	X(X)	-	XX	-	X(X)
Wattage	CCT	Trims		Inner Trim		Lenses		Filters
6 10	27 – 2700K 30 – 3000K 40 – 4000K DtW – Dim To Warm TW – Tunable White	RFW – Round Fixed White RFB – Round Fixed Black RAW – Round Adj. White RAB – Round Adj. Black AFW – Aluminum Fixed White ¹ AFB – Aluminum Fixed Black ¹ AAW – Aluminum Adj. White ¹ AAB – Aluminum Adj. Black ¹ SF – Square Fixed GB – Gible ¹ TRF – Trimless Round Fixed TRA – Trimless Round Adj. TGB – Trimless Gible ¹ TSF – Trimless Square Fixed		W – Matt White B – Matt Black CB – Chrome Black S – Chrome Silver G – Chrome Gold RH – Round Pinhole ² OH – Oval Pinhole ³ SH – Square Pinhole ⁴		24 – 24° Beam Angle 30 – 30° Beam Angle 40 – 40° Beam Angle 55 – 55° Beam Angle		N – No Filter H – Honeycomb L – Linear Spread SO – Soft Beam AG – Anti-Glare Snoot 54 – IP54 Filter
								Dim Options On/Off 6W 9540261 On/Off 10W 9540262 Triac 9844008 Dali 9621523

Example 1
'6-27-GB-24-N Dali


Example 2
6-27-RFW-CB-24-L Triac

¹These options are not compatible with inner trim and filters. Please leave blank the inner trim option in the code making. See example.
²Only compatible with round fix trims.
³Only compatible with round adjustable trims.
⁴Only compatible with square trims.


WITH TRIM




Inner Trims

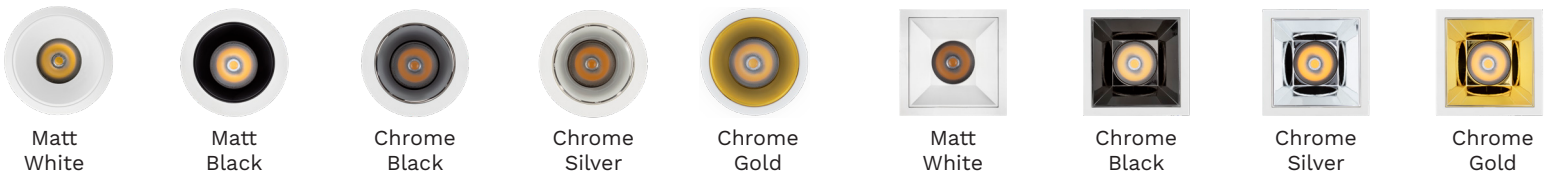

TRIMLESS

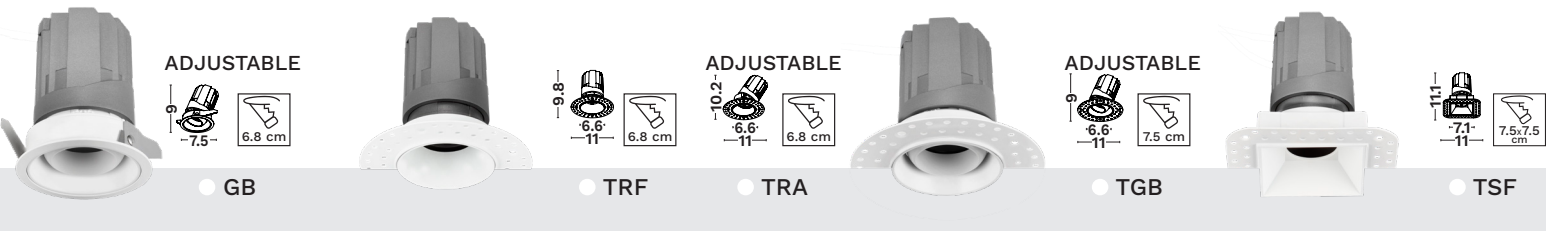

Pinholes



Filters



Trimless Drilling Accessory

CODE	DIMENSIONS (mm)	
9090096	D70 x D115 x 3	

Technical Specification

WATT	CCT	FLUX	I _{OUT}	VOLTAGE
15	2700K	1560Lm	350 mA	36Vdc
15	3000K	1600Lm	350 mA	36Vdc
15	4000K	1710Lm	350 mA	36Vdc
15	1800K - 3000K	1140Lm	350 mA	36Vdc
15	2700K - 5700K	1120Lm	350 mA	36Vdc



*For complete product using chrome silver inner trim

Code

XX	-	XX(X)	-	X(X)	-	XX	-	X(X)		
Wattage 15		CCT 27 – 2700K 30 – 3000K 40 – 4000K DtW – Dim To Warm TW – Tunable White		Trims RFW – Round Fixed White RFB – Round Fixed Black RAW – Round Adj. White RAB – Round Adj. Black AFW – Aluminum Fixed White ¹ AFB – Aluminum Fixed Black ¹ AAW – Aluminum Adj. White ¹ AAB – Aluminum Adj. Black ¹ SF – Square Fixed GB – Gible ¹ TRF – Trimless Round Fixed TRA – Trimless Round Adj. TGB – Trimless Gible ¹ TSF – Trimless Square Fixed		Inner Trim W – Matt White B – Matt Black CB – Chrome Black S – Chrome Silver G – Chrome Gold RH - Round Pinhole ² OH - Oval Pinhole ³ SH - Square Pinhole ⁴		Lenses 24 – 24° Beam Angle 30 – 30° Beam Angle 40 – 40° Beam Angle 55 – 55° Beam Angle		Filters N – No Filter H – Honeycomb L – Linear Spread SO – Soft Beam AG – Anti-Glare Snoot 54 – IP54 Filter
								Dim Options On/Off 9540263 Triac 9844019 Dali 9621523 Dali TW 9621519		

Example 1 ¹5-27-GB-24-N Dali
Example 2 15-27-RFW-CB-24-L Triac

¹These options are not compatible with inner trim and filters. Please leave blank the inner trim option in the code making. See example.

²Only compatible with round fix trims.

³Only compatible with round adjustable trims.


⁴Only compatible with square trims.

One L


WITH TRIM



Inner Trims

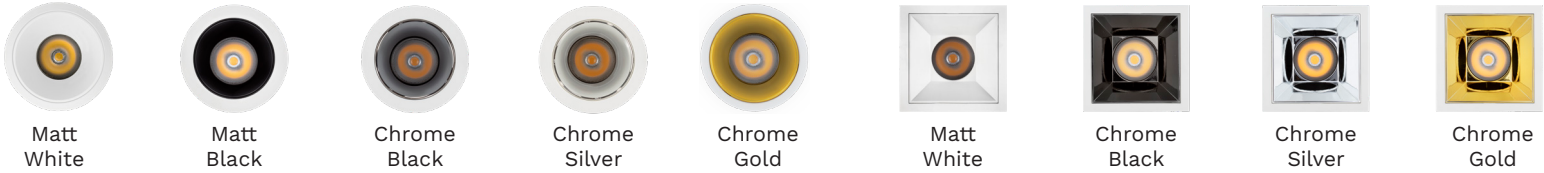

Pinholes



Filters



Trimless Drilling Accessory

CODE	DIMENSIONS (mm)
9090096	D70 x D115 x 3

Technical Specification

WATT	CCT	FLUX	I _{out}	VOLTAGE
20	2700K	2200Lm	500 mA	36Vdc
20	3000K	2250Lm	500 mA	36Vdc
20	4000K	2365Lm*	500 mA	36Vdc



*For complete product using chrome silver inner trim

Code

XX	-	XX(X)	-	XX(X)	-	X(X)	-	XX	-	X(X)
Wattage 20		CCT 27 – 2700K 30 – 3000K 40 – 4000K		Trims RFW – Round Fixed White RFB – Round Fixed Black RAW – Round Adj. White RAB – Round Adj. Black AFW – Aluminum Fixed White ¹ AFB – Aluminum Fixed Black ¹ AAW – Aluminum Adj. White ¹ AAB – Aluminum Adj. Black ¹ SF – Square Fixed GB – Gible ¹ TRF – Trimless Round Fixed TRA – Trimless Round Adj. TGB – Trimless Gible ¹ TSF – Trimless Square Fixed		Inner Trim W – Matt White B – Matt Black CB – Chrome Black S – Chrome Silver G – Chrome Gold RH – Round Pinhole ² OH – Oval Pinhole ³ SH – Square Pinhole ⁴		Lenses 24 – 24° Beam Angle 30 – 30° Beam Angle 40 – 40° Beam Angle 55 – 55° Beam Angle		Filters N – No Filter H – Honeycomb L – Linear Spread SO – Soft Beam AG – Anti-Glare Snoot 54 – IP54 Filter
										Dim Options On/Off 9540264 Triac 9844002 Dali 9621523


Example 1
¹ 20-27-GB-24-N Dali
Example 2
20-27-RFW-CB-24-L Triac

¹These options are not compatible with inner trim and filters. Please leave blank the inner trim option in the code making. See example.
²Only compatible with round fix trims.
³Only compatible with round adjustable trims.
⁴Only compatible with square trims.

MiniOne Wallwasher

PRO

- Wallwasher
- 30mm Cut-Out



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9090033 ○	6W	3000K	370Lm	D 3.6 H 7.8	36Vdc	150mA	On/Off 9540265 Dali 9621523 (remote) Triac 9844008 (remote)





Our MiniOne range includes a **Wallwasher version** designed for **uniform vertical illumination**, perfect for accentuating walls and architectural features. It combines **precise optics** with a clean design, ideal for creating depth and visual impact.

MiniOne PRO

with special lens

- Special LENS
- 35mm Cut-Out

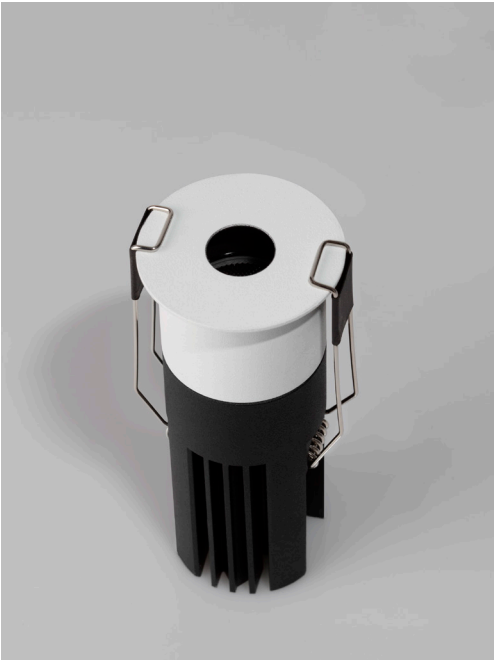

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9090029 ○	8W	2700K	385Lm	D 4.1 H 9.2	36Vdc	200mA	On/Off 9540266 Dali 9621523 Triac 9844008 (remote)
9090031 ○	8W	3000K	385Lm	D 4.1 H 9.2	36Vdc	200mA	
9090030 ●	8W	2700K	385Lm	D 4.1 H 9.2	36Vdc	200mA	
9090032 ●	8W	3000K	385Lm	D 4.1 H 9.2	36Vdc	200mA	



Our MiniOne range also includes a dedicated version featuring with special lens optics, designed to deliver a refined lighting effect where **the source remains completely hidden**, and only the end result is visible. This creates a **glare-free, seamless visual experience** that blends effortlessly into the architecture. The special lens version is ideal for interiors where **minimalism and visual comfort** are essential, offering a sophisticated solution that enhances both **aesthetics and lighting performance**.



RECESSED
DOWNLIGHTS

We offer a **wide range of downlight solutions**—from **simple residential applications** to the most **demanding environments**, such as **fine arts galleries and museums**. Featuring **CRI >98, SDCM <3, high efficiency**, and excellent **value**, our products are designed to meet any lighting need with **precision and flexibility**. In line with the **latest industry standards**, we also provide solutions with **interchangeable socket systems** and options compatible with the **Zhaga protocol**, ensuring a smart balance between **quality, performance, cost and long-term sustainability**.

Loggia

PRO

- Small body ideal for showcases/ cabinetry
- Surface mount accessory available



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9030692 ○	1W	3000K	98Lm	D 3 H 2.2	3Vdc	350mA	On/Off 9020170
9030693 ●	1W	3000K	98Lm	D 3 H 2.2	3Vdc	350mA	Dali 9844145 (remote)



OPTIONAL ACCESSORIES

9030694 9030695



Tiny

PRO

- Ideal for shallow installations
- Professional and minimal size
- IP44 and IP65 options



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
8035601 ○	1W	3000K	70Lm	D 1.6 H 2	3Vdc	350mA	On/Off 9020170 (remote)
9017812 ●	1W	3000K	70Lm	D 1.6 H 2	3Vdc	350mA	Dali 9844145 (remote)



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
8125801 ○	1W	3000K	70Lm	D 2.2 H 2.9	3Vdc	350mA	On/Off 9020170 (remote)
							Dali 9844145 (remote)



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9080201 ○	1W	3000K	70Lm	D 2.5 H 2	3Vdc	350mA	On/Off 9020170 (remote)
9080202 ●	1W	3000K	70Lm	D 2.5 H 2	3Vdc	350mA	Dali 9844145 (remote)



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9110134 ○	2W	2700K	143Lm	D 2.5 H 4.9	3Vdc	700mA	On/Off 9097023 (remote) Dali 9844145 (remote)
9110136 ○	2W	3000K	143Lm	D 2.5 H 4.9	3Vdc	700mA	
9110135 ●	2W	2700K	143Lm	D 2.5 H 4.9	3Vdc	700mA	
9110137 ●	2W	3000K	143Lm	D 2.5 H 4.9	3Vdc	700mA	



Elvi

PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9040112	○ 2W	3000K	110Lm	D 2.2 H 3.6	24Vdc	-	-
9040113	● 2W	3000K	110Lm	D 2.2 H 3.6	24Vdc	-	-



Remote Drivers

	CODE	DESCRIPTION	DIMENSIONS
IP20	9840110	30W, 24Vdc	L 12.9 W 5 H 1.35
	9840100	60W, 24Vdc	L 16 W 5.75 H 1.8
IP67	9840106	75W, 24Vdc	L 13.8 W 6.3 H 3.2



Lucy

PRO

- Ideal for shallow installations



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844060	● 3W	3000K	173Lm	D 2.8 H 4	220-240Vac	-	On/Off Included
9844061	○ 3W	3000K	186Lm	D 2.8 H 4	220-240Vac	-	Dali 9844145 (remote)



Ado

PRO

- Ideal for shallow installations



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844062	● 3W	3000K	196Lm	D 4 H 4	220-240Vac	-	On/Off Included
9844063	○ 3W	3000K	209Lm	D 4 H 4	220-240Vac	-	Dali 9844145 (remote)



Dustproof

PRO

- IP65
- Ideal for shallow installations (h<4cm)



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9110131	●	3W	2700K	288Lm	D 3.9 H 3.9	9Vdc	350mA	On/Off 9020170 Dali 9844145 (remote)
9110133	●	3W	3000K	288Lm	D 3.9 H 3.9	9Vdc	350mA	
9110130	○	3W	2700K	288Lm	D 3.9 H 3.9	9Vdc	350mA	
9110132	○	3W	3000K	288Lm	D 3.9 H 3.9	9Vdc	350mA	



Cyta

PRO

- IP54




CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232224	○	3W	3000K	159Lm	D 4.6 H 6	220-240Vac	-	On/Off Included Dali 9844145
9232225	●	3W	3000K	159Lm	D 4.6 H 6	220-240Vac	-	



Tif Lens

PRO

- Focused beam angle of 4°
- Ideal for shallow installations
- Field adjusted beam angle



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9097021	○	2W	3000K	148Lm	D 6 H 4.8	3Vdc	700mA	On/Off 9097023 Dali 9844145
9097022	●	2W	3000K	148Lm	D 6 H 4.8	3Vdc	700mA	




Ambry

PRO

EASY INSTALLATION

DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9110120	●	5W	2700K	323Lm	D 3.4 H 6.5	18Vdc	250mA	On/Off 9030470 Dali 9844146 Triac 9844008 (remote)
9030784	●	5W	3000K	323Lm	D 3.4 H 6.5	18Vdc	250mA	



Delve

PRO

- IP65
- Honeycomb filter
- CRI>97



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9031785 ○	5W	2700K	199Lm	D 4 H 6.4	18Vdc	250mA	On/Off 9030471 Dali 9844146 Triac 9844008 (remote)
9030785 ○	5W	3000K	199Lm	D 4 H 6.4	18Vdc	250mA	
9031786 ●	5W	2700K	199Lm	D 4 H 6.4	18Vdc	250mA	
9030786 ●	5W	3000K	199Lm	D 4 H 6.4	18Vdc	250mA	



This **IP65-rated downlight** combines durability with premium performance, featuring **CRI 98** for true color rendering and a **honeycomb filter** for effective glare control—ideal for high-end, visually demanding environments.

Selene

PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9052013 ●	5W	3000K	309Lm	D 4 H 6.4	12Vdc	500mA	On/Off 9020172 Dali 9844145 Triac 9621520 (remote)
9052014 ○	5W	3000K	309Lm	D 4 H 6.4	12Vdc	500mA	




- Trimless application with two depth positions



EASY INSTALLATION

DRIVER FITS INTO CUT-OUT DIAMETER & CAN BE REPLACED



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9052012 ●	5W	3000K	309Lm	D 3.8 H 6.1	12Vdc	500mA	On/Off 9020172 Dali 9844145 Triac 9621520 (remote)
9052015 ○	5W	3000K	309Lm	D 3.8 H 6.1	12Vdc	500mA	



Praet

PRO



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9040114	○	6W	3000K	400Lm	D 3.9 H 5	220-240Vac	-	On/Off Incuded
9040115	●	6W	3000K	400Lm	D 3.9 H 5	220-240Vac	-	Dali 9844146



Dash


PRO




CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9030682	○	7W	3000K	483Lm	D 4 H 8.7	19Vdc	350mA	On/Off 9030686
9030683	●	7W	3000K	483Lm	D 4 H 8.7	19Vdc	350mA	Dali 9621523/9844010 Triac 9844008 (remote)



- Trimless application with two depth positions



EASY INSTALLATION
DRIVER FITS INTO CUT-OUT DIAMETER & CAN BE REPLACED



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9030684	○	7W	3000K	467Lm	D 3.8 H 8.7	19Vdc	350mA	On/Off 9030686 Dali 9621523
9030685	●	7W	3000K	467Lm	D 3.8 H 8.7	19Vdc	350mA	Triac 9844008 (remote)



Glade

PRO

- Focused beam angle
- Miniature aperture of 12mm light output area
- Trimless
- UGR < 7



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9110121	○ 7W	2700K	150Lm	D 8.5 H 7.5	18Vdc	350mA	On/Off 9030472
9030787	○ 7W	3000K	150Lm	D 8.5 H 7.5	18Vdc	350mA	Dali 9621523/9844010 Triac 9844008 (remote)



Thiny

PRO

- Replaceable
- 32mm light output area
- Trimless



EASY INSTALLATION

DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844094	○ 6W	3000K	347Lm	D 3.2 H 10.6	220-240Vac	-	On/Off Included Dali 9844145 Triac 9844008 (remote)






Compact



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9040101 ○	8W	2700K	560Lm	D 3.8 H 7.5	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844008 (remote)
9040100 ○	8W	3000K	560Lm	D 3.8 H 7.5	220-240Vac	-	
9040103 ●	8W	2700K	560Lm	D 3.8 H 7.5	220-240Vac	-	
9040102 ●	8W	3000K	560Lm	D 3.8 H 7.5	220-240Vac	-	




Modular

EASY INSTALLATION
DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED

OPTIONAL ACCESSORIES
White ring
9040106



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9040105 ●	8W	2700K	540Lm	D 3.2 H 7.2	220-240Vac	-	On/Off Included
9040104 ●	8W	3000K	540Lm	D 3.2 H 7.2	220-240Vac	-	Dali 9621523 Triac 9844008



COMPACT

FIXED




MODULAR ADJUSTABLE


ROUND



SQUARE






TRIMLESS



9040100 ○ / 9040101 ○
9040102 ● / 9040103 ●

9040104 / 9040105
9040107 ○ / 9040108 ●
9040109 ○ / 9040110 ●

9040111




Otto Lens

PRO



This advanced downlight is engineered with a **special precision lens** that ensures **zero light diffusion**, producing a clean, sharply defined beam without unwanted spill or glare. Ideal for applications requiring pinpoint accuracy—such as galleries, retail displays, or detailed task lighting—it offers a **CRI of 98**, delivering exceptional color fidelity and natural rendering of tones and textures. The combination of **crisp light output** and **superior color performance** makes it a perfect choice for spaces where **visual clarity and true color representation** are essential.



- Ideal for applications in fine arts, museums and restaurants
- Focused 10° beam angle
- Special lens with no light diffusion
- Centered on field adjusted beam angle options



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9030687 ○	7W	3000K	103Lm	D 5 H 8.7	19Vdc	350mA	On/Off 9030686
9030688 ●	7W	3000K	103Lm	D 5 H 8.7	19Vdc	350mA	Dali 9621523/9844010 Triac 9844008 (remote)



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9030689 ○	7W	3000K	112Lm	D 9.1 H 8.5	19Vdc	350mA	On/Off 9030686
9030690 ●	7W	3000K	112Lm	D 9.1 H 8.5	19Vdc	350mA	Dali 9621523/9844010 Triac 9844008



Hollow

PRO

- Two beam angle options
- Field adjusted beam angle
- Trim and trimless options

OPTIONAL ACCESSORIES

Lens 36°



9030680



36°



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9030676 ○	7W	3000K	394Lm	D 6 H 8.4	19Vdc	350mA	On/Off 9030671
9030677 ●	7W	3000K	394Lm	D 6 H 8.4	19Vdc	350mA	Dali 9621523/9844010 Triac 9844008



EASY INSTALLATION

DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED



OPTIONAL ACCESSORIES


Lens 36°



9030680



36°




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9030678 ○	7W	3000K	394Lm	D 5.5 H 8.3	19Vdc	350mA	On/Off 9030671
9030679 ●	7W	3000K	394Lm	D 5.5 H 8.3	19Vdc	350mA	Dali 9621523/9844010 Triac 9844008



Lonza

PRO

- Ideal for shallow installations
- Field adjusted beam angle



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9110122 ○	7W	2700K	602Lm	D 8.6 H 4	18Vdc	350mA	On/Off 9030671 Dali 9621523/9844010 Triac 9844008
9030788 ○	7W	3000K	602Lm	D 8.6 H 4	18Vdc	350mA	
9110123 ●	7W	2700K	602Lm	D 8.6 H 4	18Vdc	350mA	
9030789 ●	7W	3000K	602Lm	D 8.6 H 4	18Vdc	350mA	



Talus

PRO



This downlight features a **compact trim design** for a sleek, unobtrusive appearance, ideal for refined and modern interiors. The **Dim to Warm** version offers smooth dimming from **3000K down to 1800K**, replicating the warm, cozy glow of traditional incandescent lighting—perfect for creating inviting atmospheres in residential, hospitality, or boutique retail spaces.




- CRI>97
- Dim to warm version
- Trim and trimless options with several depth poistions
- IP44
- Very narrow trim



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9030659 ○	10W	3000K	716Lm	D 6 H 6.5	19Vdc	500mA	On/Off 9020171 Dali 9621523 Triac 9844019
9030660 ●	10W	3000K	716Lm	D 6 H 6.5	19Vdc	500mA	Triac 9844019
9030661 ○	7W	1800K-3000K	558Lm	D 6 H 6.5	19Vdc	350mA	Dali 9621523/9844010 Triac 9030658



EASY INSTALLATION
DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9030655 ○	10W	3000K	716Lm	D 5.5 W 11.3 H 6.5	19Vdc	500mA	On/Off 9020171 Dali 9621523 Triac 9844019
9030656 ●	10W	3000K	716Lm	D 5.5 W 11.3 H 6.5	19Vdc	500mA	Triac 9844019
9030657 ○	7W	1800K-3000K	558Lm	D 5.5 W 11.3 H 6.5	19Vdc	350mA	Dali 9621523/9844010 Triac 9030658



Cirrus

PRO

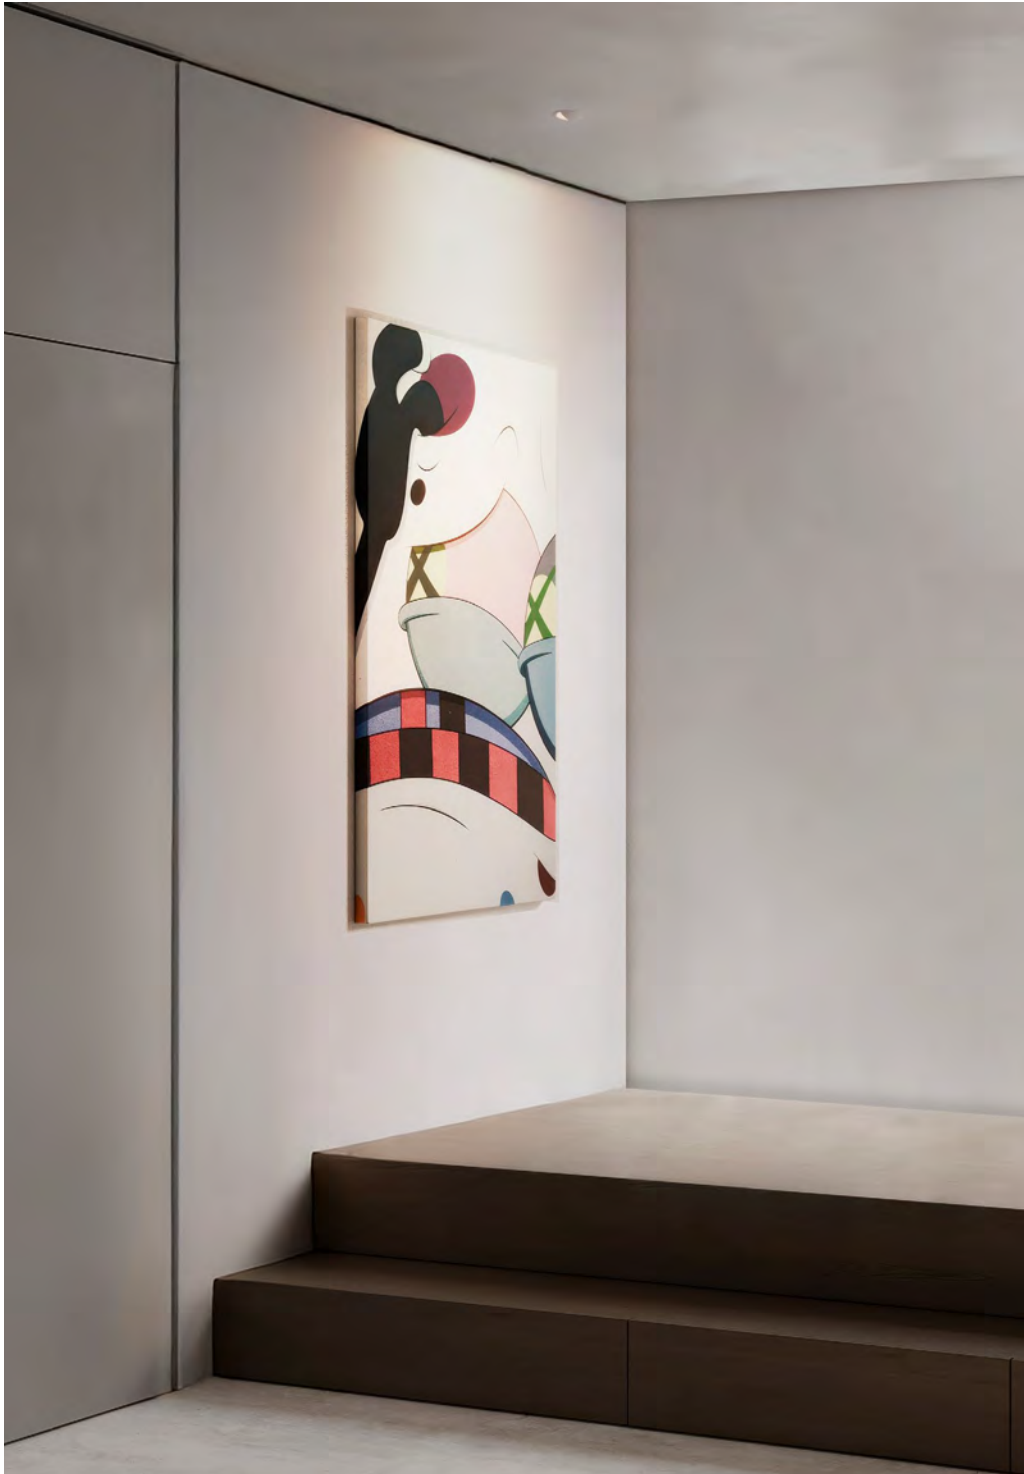

This versatile downlight is available in **three versions**: a **standard downlight**, a **wallwasher**, and a **pinhole**. With a single fixture, you can easily switch between functions by using **interchangeable accessories**—one for creating a smooth **wallwashing effect** and another for achieving a precise, **low-glare pinhole appearance**. This flexible design makes it an ideal solution for dynamic lighting needs across various architectural applications.



- Wallwasher or Pinhole
- Same product, two type of applications with optional accesory
- IP44
- Very narrow trim



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9030663 ○	13W	3000K	1077Lm	D 7.3 H 6.8	37Vdc	350mA	On/Off 9020173 Dali 9621523 Triac 9844008
9030664 ●	13W	3000K	1077Lm	D 7.3 H 6.8	37Vdc	350mA	



OPTIONAL ACCESSORIES

Pin Hole




9030667

9030668

6.38

2.6



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9030665 ○	13W	3000K	934Lm	D 7.3 H 7.8	37Vdc	350mA	On/Off 9020173 Dali 9621523 Triac 9844008
9030666 ●	13W	3000K	934Lm	D 7.3 H 7.8	37Vdc	350mA	




Oblivion

PRO



This downlight features a **modular system** designed for both **trimless square and round applications**, allowing seamless integration into ceilings with a clean, minimalist finish. The flexible design ensures easy installation and alignment, making it ideal for modern interiors where **discreet aesthetics** and **architectural precision** are key.

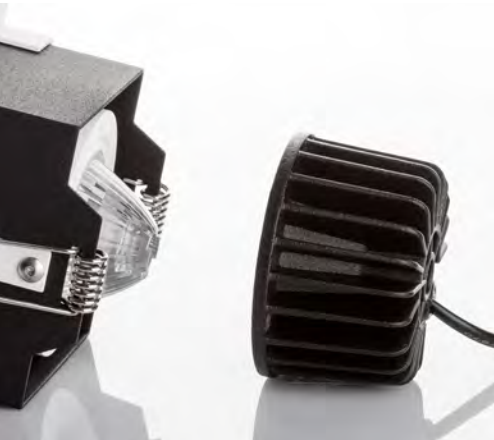

EASY INSTALLATION

DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED




- IP44
- Round or Square
- Trimless
- Customizable



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
8016905 ●	10W	3000K	861Lm	D 6.3 H 3.8	20Vdc	500mA	On/Off 9020171
8016906 ●	10W	4000K	861Lm	D 6.3 H 3.8	20Vdc	500mA	Dali 9621523 Triac 9844019



CODE
8019310 ● / 8019109 ○

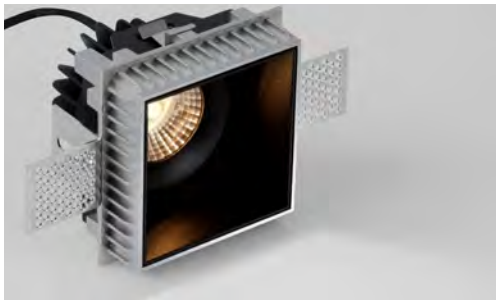

CODE
8014910 ●



CODE
8000503 ● / 8000502 ○



Blade

PRO



Our popular **IP65-rated downlight series** is built for **high-quality, long-lasting performance** in both indoor and outdoor environments. Engineered for durability and reliability, it combines **robust protection** against dust and moisture with excellent light output, making it a trusted choice for residential, commercial, and hospitality applications.



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232213 ○	9W	2700K	557Lm	D 5.5 H 7	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844008 (remote)
9232212 ○	9W	3000K	557Lm	D 5.5 H 7	220-240Vac	-	
9232215 ●	9W	2700K	557Lm	D 5.5 H 7	220-240Vac	-	
9232214 ●	9W	3000K	557Lm	D 5.5 H 7	220-240Vac	-	



- IP65
- Shallow version
- Field adjusted beam angle



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232116 ○	12W	3000K	874Lm	D 7.8 H 7.2	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844008
9232115 ●	12W	3000K	874Lm	D 7.8 H 7.2	220-240Vac	-	



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232117 ○	12W	3000K	759Lm	D 9 H 4.7	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844008
9232118 ●	12W	3000K	759Lm	D 9 H 4.7	220-240Vac	-	



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232119 ○	12W	3000K	874Lm	D 8.5 H 5.4	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844008
9232120 ●	12W	3000K	874Lm	D 8.5 H 5.4	220-240Vac	-	



Germin

PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540221 ○	10W	3000K	813Lm	L 7.5 W 7.5 H 6.6	19Vdc	500mA	On/Off 9020171
9540222 ●	10W	3000K	813Lm	L 7.5 W 7.5 H 6.6	19Vdc	500mA	Dali 9621523 Triac 9844019



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540223 ○	10W	3000K	813Lm	D 8 H 6.9	19Vdc	500mA	On/Off 9020171
9540224 ●	10W	3000K	813Lm	D 8 H 6.9	19Vdc	500mA	Dali 9621523 Triac 9844019



Candry

PRO




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9071021 ○	10W	3000K	600Lm	D 8.2 H 7.9	20Vdc	500mA	On/Off 9020171
9071022 ●	10W	3000K	600Lm	D 8.2 H 7.9	20Vdc	500mA	Dali 9621523 Triac 9844019



Baculus

ESSENTIAL





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	Iout	DRIVER
9052020 ○	5W	3000K	305Lm	D 3 H 8.6	220-240Vac	-	On/Off Included Dali 9844146 (remote)
9052021 ●	5W	3000K	271Lm	D 3 H 8.6	220-240Vac	-	Triac 9844008 (remote)




EASY INSTALLATION

DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	Iout	DRIVER
9052024 ○	5W	3000K	283Lm	D 6 H 8.1	220-240Vac	-	On/Off Included Dali 9844146 (remote)
9052025 ●	5W	3000K	270Lm	D 6 H 8.1	220-240Vac	-	Triac 9844008 (remote)



Duran

ESSENTIAL




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9052022 ○	10W	3000K	580Lm	D 3.5 H 9.1	220-240Vac	-	On/Off Included Dali 9621523 (remote)
9052023 ●	10W	3000K	532Lm	D 3.5 H 9.1	220-240Vac	-	Triac 9844008 (remote)




EASY INSTALLATION

DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9052026 ○	10W	3000K	554Lm	D 7 H 9.1	220-240Vac	-	On/Off Included Dali 9621523 (remote)
9052027 ●	10W	3000K	539Lm	D 7 H 9.1	220-240Vac	-	Triac 9844008 (remote)



Uho

ESSENTIAL

- Focused and wide beam angles



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	l _{out}	DRIVER
9570002	● 3W	3000K	214Lm	D 4.5 H 5	220-240Vac	-	On/Off Included
9570004	○ 3W	3000K	214Lm	D 4.5 H 5	220-240Vac	-	Dali 9844145



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	l _{out}	DRIVER
9570020	● 3W	3000K	214Lm	D 4.5 H 5	220-240Vac	-	On/Off Included
9570021	○ 3W	3000K	214Lm	D 4.5 H 5	220-240Vac	-	Dali 9844145



- Trimless



EASY INSTALLATION

DRIVER FITS INTO CUT-OUT DIAMETER & CAN BE REPLACED



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	l _{out}	DRIVER
9570001	● 3W	3000K	214Lm	D 6.8 H 5	220-240Vac	-	On/Off Included
9570003	○ 3W	3000K	214Lm	D 6.8 H 5	220-240Vac	-	Dali 9844145



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	l _{out}	DRIVER
9570018	● 3W	3000K	214Lm	D 6.8 H 5	220-240Vac	-	On/Off Included
9570019	○ 3W	3000K	214Lm	D 6.8 H 5	220-240Vac	-	Dali 9844145




Glyce


ESSENTIAL




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844020	6W	2700K	438Lm	D 4 H 6	220-240Vac	-	On/Off Included Dali 9844146 Triac 9844008 (remote)
9844022	6W	3000K	438Lm	D 4 H 6	220-240Vac	-	
9844151	6W	4000K	438Lm	D 4 H 6	220-240Vac	-	
9844021	6W	2700K	378Lm	D 4 H 6	220-240Vac	-	
9844023	6W	3000K	378Lm	D 4 H 6	220-240Vac	-	
9844154	6W	4000K	378Lm	D 4 H 6	220-240Vac	-	



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844024	12W	2700K	874Lm	D 6 H 8.5	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844019
9844026	12W	3000K	874Lm	D 6 H 8.5	220-240Vac	-	
9844152	12W	4000K	874Lm	D 6 H 8.5	220-240Vac	-	
9844025	12W	2700K	738Lm	D 6 H 8.5	220-240Vac	-	
9844027	12W	3000K	738Lm	D 6 H 8.5	220-240Vac	-	
9844155	12W	4000K	738Lm	D 6 H 8.5	220-240Vac	-	



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844028	20W	2700K	1169Lm	D 7.4 H 10	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844002
9844030	20W	3000K	1169Lm	D 7.4 H 10	220-240Vac	-	
9844153	20W	4000K	1169Lm	D 7.4 H 10	220-240Vac	-	
9844029	20W	2700K	1079Lm	D 7.4 H 10	220-240Vac	-	
9844031	20W	3000K	1079Lm	D 7.4 H 10	220-240Vac	-	
9844156	20W	4000K	1079Lm	D 7.4 H 10	220-240Vac	-	



Feller

ESSENTIAL




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232230	5W	2700K	277Lm	D 4.2 H 5.6	220-240Vac	-	On/Off Included Dali 9844146 Triac 9844008 (remote)
9232232	5W	3000K	277Lm	D 4.2 H 5.6	220-240Vac	-	
9232231	5W	2700K	277Lm	D 4.2 H 5.6	220-240Vac	-	
9232233	5W	3000K	277Lm	D 4.2 H 5.6	220-240Vac	-	



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232234	10W	2700K	585Lm	D 5.4 H 7	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844008 (remote)
9232236	10W	3000K	585Lm	D 5.4 H 7	220-240Vac	-	
9232235	10W	2700K	585Lm	D 5.4 H 7	220-240Vac	-	
9232237	10W	3000K	585Lm	D 5.4 H 7	220-240Vac	-	



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232238	15W	2700K	833Lm	D 6.6 H 8.5	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844019
9232240	15W	3000K	833Lm	D 6.6 H 8.5	220-240Vac	-	
9232239	15W	2700K	833Lm	D 6.6 H 8.5	220-240Vac	-	
9232241	15W	3000K	833Lm	D 6.6 H 8.5	220-240Vac	-	




Bree


ESSENTIAL



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232111	○	7W	3000K	426Lm	D 5.6 H 7.5	220-240Vac	-	On/Off Included
9232112	●	7W	3000K	426Lm	D 5.6 H 7.5	220-240Vac	-	Dali 9621523/9844010 Triac 9844008




CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232113	○	7W	3000K	426Lm	L 5.6 W 5.6 H 7.5	220-240Vac	-	On/Off Included
9232114	●	7W	3000K	426Lm	L 5.6 W 5.6 H 7.5	220-240Vac	-	Dali 9621523/9844010 Triac 9844008





Sanco

ESSENTIAL


- Four different color options
- Two different trim styles



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9695130	○ 10W	2700K	732Lm	D 6 H 6	220-240Vac	-	On/Off Included Dali 9621523/9844010 Triac 9844008
9695134	○ 10W	3000K	775Lm	D 6 H 6	220-240Vac	-	
9695326	○ 10W	4000K	780Lm	D 6 H 6	220-240Vac	-	
9695131	● 10W	2700K	732Lm	D 6 H 6	220-240Vac	-	
9695135	● 10W	3000K	775Lm	D 6 H 6	220-240Vac	-	
9695327	● 10W	4000K	780Lm	D 6 H 6	220-240Vac	-	
9695132	● 10W	2700K	732Lm	D 6 H 6	220-240Vac	-	
9695136	● 10W	3000K	775Lm	D 6 H 6	220-240Vac	-	
9695133	● 10W	2700K	732Lm	D 6 H 6	220-240Vac	-	
9695137	● 10W	3000K	775Lm	D 6 H 6	220-240Vac	-	



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9695138	○ 10W	2700K	681Lm	D 6 H 6	220-240Vac	-	On/Off Included Dali 9621523/9844010 Triac 9844008
9695142	○ 10W	3000K	712Lm	D 6 H 6	220-240Vac	-	
9695334	○ 10W	4000K	730Lm	D 6 H 6	220-240Vac	-	
9695139	● 10W	2700K	681Lm	D 6 H 6	220-240Vac	-	
9695143	● 10W	3000K	712Lm	D 6 H 6	220-240Vac	-	
9695335	● 10W	4000K	730Lm	D 6 H 6	220-240Vac	-	
9695140	● 10W	2700K	681Lm	D 6 H 6	220-240Vac	-	
9695144	● 10W	3000K	712Lm	D 6 H 6	220-240Vac	-	
9695141	● 10W	2700K	681Lm	D 6 H 6	220-240Vac	-	
9695145	● 10W	3000K	712Lm	D 6 H 6	220-240Vac	-	



Sanco, our most popular downlight series, is the perfect blend of **cost-effectiveness and quality**. It is available in **two trim styles** and comes in **four elegant color options—Black, White, Gun Metal, and Gold**—offering flexibility to suit a wide range of interior styles. Designed for performance and visual appeal, Sanco is a go-to solution for both residential and commercial projects.

Ono

ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9060209 ●	8W	3000K	461Lm	L 6.2 W 6.2 H 5.3	220-240Vac	-	On/Off Included Dali 9621523
9060210 ○	8W	3000K	461Lm	L 6.2 W 6.2 H 5.3	220-240Vac	-	Triac 9844002



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9060211 ●	8W	3000K	461Lm	D 6.2 H 5.3	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844002



Petit


ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9844011 ○	9W	3000K	338Lm	D 6.2 H 5.5	220-240Vac	-	On/Off Included
9844012 ●	9W	3000K	338Lm	D 6.2 H 5.5	220-240Vac	-	Dali 9621523/9844010 Triac 9844008



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9844013	○ 9W	3000K	338Lm	D 6.2 H 6.1	220-240Vac	-	On/Off Included
9844014	● 9W	3000K	338Lm	D 6.2 H 6.1	220-240Vac	-	Dali 9621523/9844010 Triac 9844008



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9844015 ○	9W	3000K	338Lm	D 6.2 H 5.5	220-240Vac	-	On/Off Included Dali 9621523/9844010
9844016 ●	9W	3000K	338Lm	D 6.2 H 5.5	220-240Vac	-	Triac 9844008




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9844017	○ 9W	3000K	338Lm	D 6.2 H 6.1	220-240Vac	-	On/Off Included
9844018	● 9W	3000K	338Lm	D 6.2 H 6.1	220-240Vac	-	Dali 9621523/9844010 Triac 9844008



Style

ESSENTIAL

- IP44



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540300 ○	8W	3000K	653Lm	D 8 H 6.7	220-240Vac	-	Dali 9621523/9844010 Triac Included



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540301 ○	10W	3000K	828Lm	D 9 H 7.2	220-240Vac	-	Dali 9621523/9844010 Triac Included



Luella

ESSENTIAL



- Two trim colors
- Three reflector colors




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9580639 ○	13W	2700K	1147Lm	D 8.4 H 7.8	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844019
9580621 ○	13W	3000K	1147Lm	D 8.4 H 7.8	220-240Vac	-	
9580643 ○	13W	4000K	1253Lm	D 8.4 H 7.8	220-240Vac	-	
9580642 ●	13W	2700K	1172Lm	D 8.4 H 7.8	220-240Vac	-	
9580624 ●	13W	3000K	1172Lm	D 8.4 H 7.8	220-240Vac	-	
9580646 ●	13W	4000K	1197Lm	D 8.4 H 7.8	220-240Vac	-	
9580640 ●	13W	2700K	925Lm	D 8.4 H 7.8	220-240Vac	-	
9580622 ●	13W	3000K	925Lm	D 8.4 H 7.8	220-240Vac	-	
9580644 ●	13W	4000K	1037Lm	D 8.4 H 7.8	220-240Vac	-	
9580641 ●	13W	2700K	1065Lm	D 8.4 H 7.8	220-240Vac	-	
9580623 ●	13W	3000K	1065Lm	D 8.4 H 7.8	220-240Vac	-	
9580645 ●	13W	4000K	1197Lm	D 8.4 H 7.8	220-240Vac	-	
9580626 ●	13W	3000K	1039Lm	D 8.4 H 7.8	220-240Vac	-	



Homer

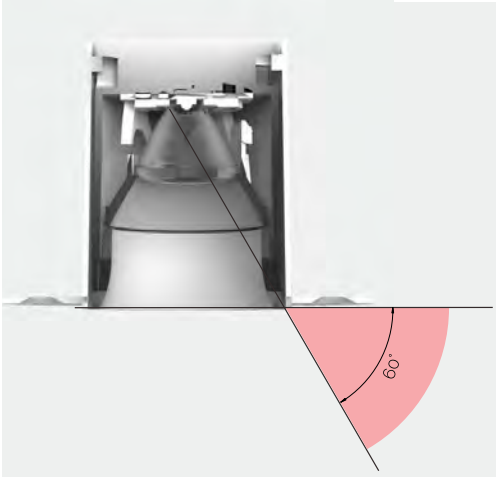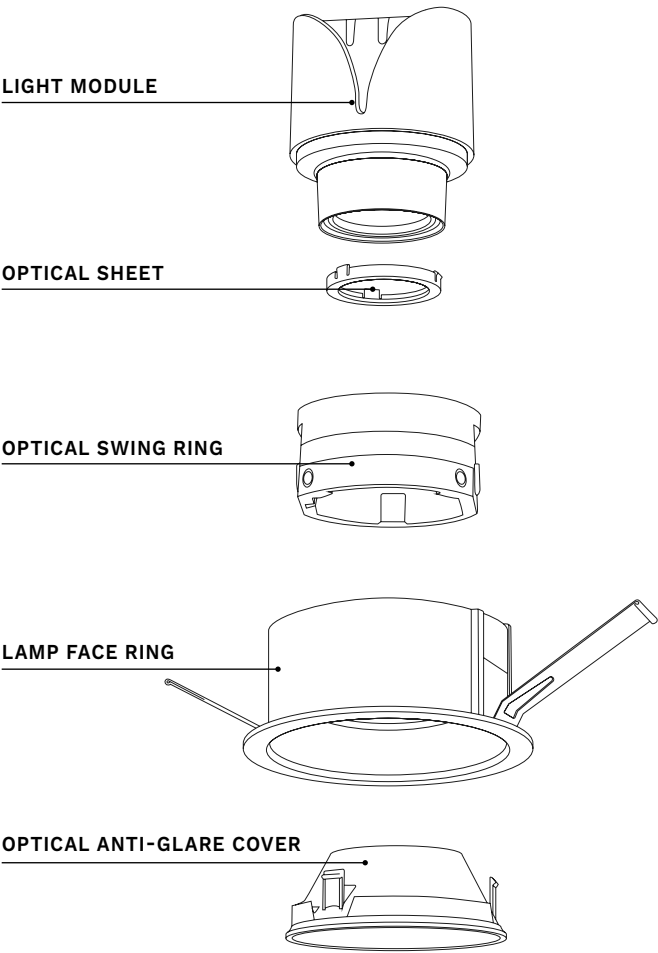

Unique Optical solution can control the cut-off angle of the light without changing the light efficiency of the product.

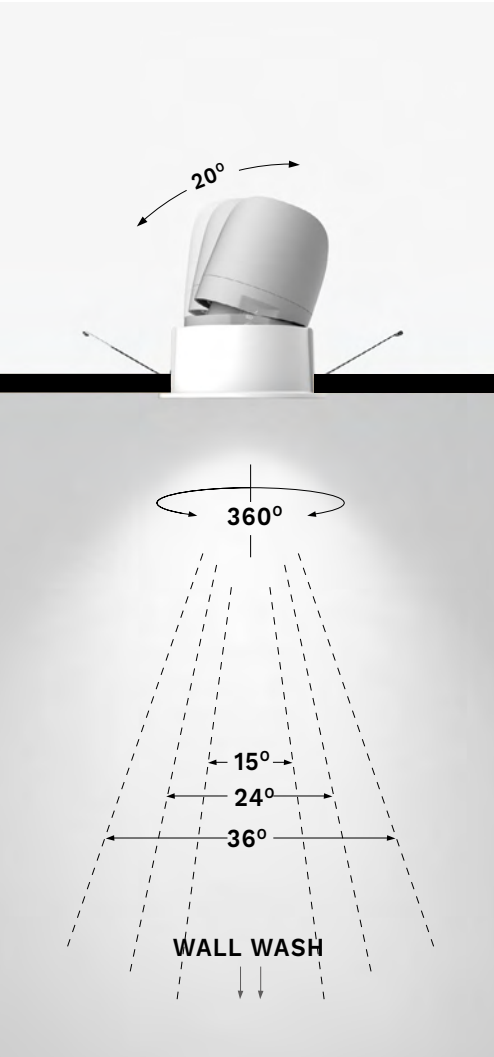

Brady

ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9070154 ●	10W	3000K	924Lm	D 10 H 7.5	220-240Vac	-	On/Off Included
9580627 ○	10W	3000K	924Lm	D 10 H 7.5	220-240Vac	-	Dali 9621523/9844010 Triac 9844008



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9070155 ●	20W	3000K	1793Lm	D 14 H 9	220-240Vac	-	On/Off Included
9580628 ○	20W	3000K	1793Lm	D 14 H 9	220-240Vac	-	Dali 9621523 Triac 9844019



Carmo

ESSENTIAL



OPTIONAL ACCESSORIES
Gold ring  9011765

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9011761 ○	10W	3000K	700Lm	D 10 H 7	37Vdc	250mA	On/Off 9011763
9011762 ●	10W	3000K	700Lm	D 10 H 7	37Vdc	250mA	Dali 9621523/9844010 Triac 9844019



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9113777 ○	20W	3000K	1128Lm	D 11.5 H 8.3	220-240Vac	-	On/Off Included
9113778 ●	20W	3000K	1128Lm	D 11.5 H 8.3	220-240Vac	-	Dali 9621523 Triac 9844002





Helio

ESSENTIAL


- Honeycomb





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9248075	● 13W	3000K	625Lm	L 8.5 W 8.5 H 6	220-240Vac	-	On/Off Included Dali 9621523
9248077	○ 13W	3000K	635Lm	L 8.5 W 8.5 H 6	220-240Vac	-	Triac 9844019



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9248076	● 25W	3000K	1191Lm	L 16.7 W 8.5 H 6	220-240Vac	-	On/Off Included Dali 9621521
9248078	○ 25W	3000K	1219Lm	L 16.7 W 8.5 H 6	220-240Vac	-	Triac 9844002



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9248070	○ 14W	2700K	663Lm	D 8.5 H 6	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844019
9248071	○ 14W	3000K	680Lm	D 8.5 H 6	220-240Vac	-	
9248072	● 14W	2700K	663Lm	D 8.5 H 6	220-240Vac	-	
9248073	● 14W	3000K	680Lm	D 8.5 H 6	220-240Vac	-	
9248074	● 14W	3000K	680Lm	D 8.5 H 6	220-240Vac	-	

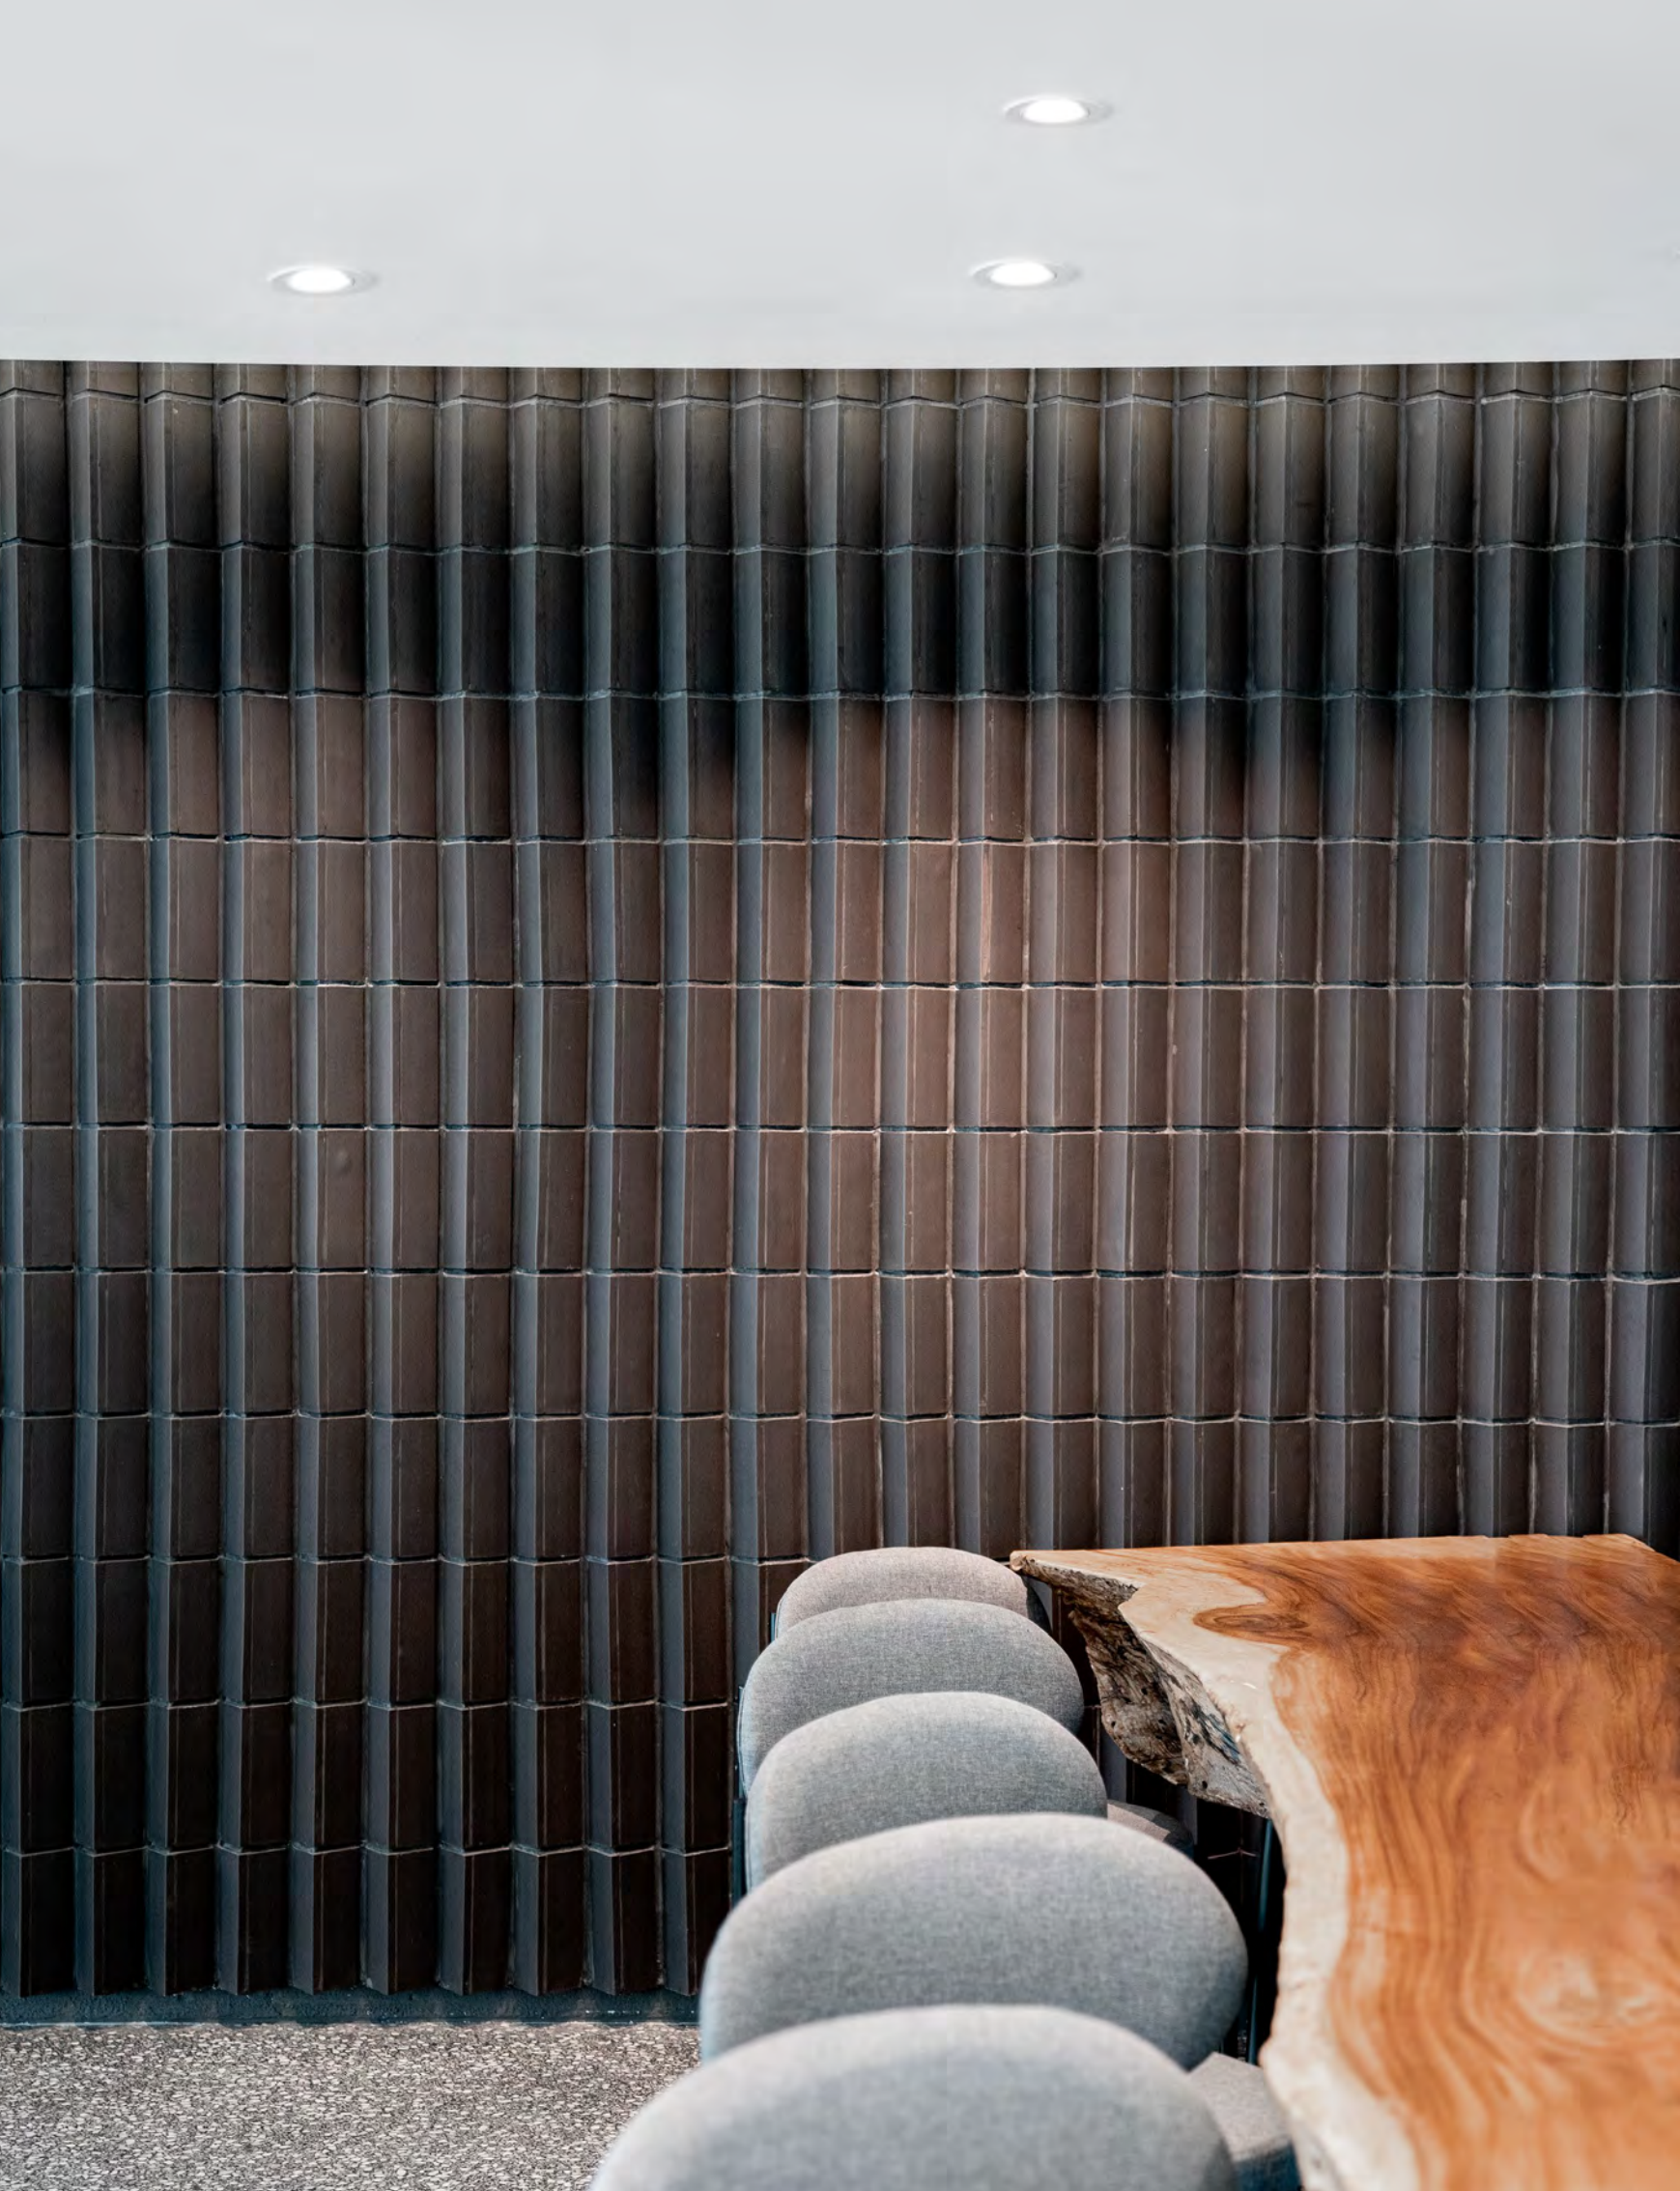



SEMI-RECESSED
DOWNLIGHTS

Our **semi-recessed downlight range** offers a wide variety of designs and sizes, combining the clean look of recessed lighting with the visual presence of surface-mounted fixtures. This versatile collection is ideal for adding architectural character while maintaining a modern, streamlined aesthetic. With options in different beam angles, finishes, and light outputs, our semi-recessed downlights provide flexible solutions for both decorative and functional applications across residential, commercial, and hospitality spaces.

Hue

PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	l _{out}	DRIVER
9232134	○ 3W	3000K	127Lm	D 6 H 25	220-240Vac	-	On/Off Included Dali 9844145 Triac 9621520
9232135	● 3W	3000K	127Lm	D 6 H 25	220-240Vac	-	
9232136	○ 3W	3000K	127Lm	D 6 H 50	220-240Vac	-	
9232137	● 3W	3000K	127Lm	D 6 H 50	220-240Vac	-	



Desert

PRO

- Small size
- Ideal for shallow installations




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9072815	3W	3000K	270Lm	D 5.2 H 5.5	9Vdc	350mA	On/Off 9020170 Dali 9844145 Triac 9844008 (remote)



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9075916	3W	3000K	270Lm	L 6.2 W 6.2 H 5.5	9Vdc	350mA	On/Off 9020170 Dali 9844145 Triac 9844008



- Connect LED in series




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9076117	9W	3000K	740Lm	L 15.7 W 6.2 H 6.6	220-240Vac	350mA	On/Off Included Dali 9621523/9844010 Triac 9844019



Zetan

PRO

- Trim and Trimless options




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9232121	5W	3000K	300Lm	D 2.6 H 25	220-240Vac	-	On/Off Included Dali 9621523/9844010 Triac 9844008
9232122	5W	3000K	300Lm	D 2.6 H 25	220-240Vac	-	On/Off Included Dali 9621523/9844010 Triac 9844008



EASY INSTALLATION

DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9223112	5W	3000K	300Lm	D 2.6 H 25	220-240Vac	-	On/Off Included Dali 9621523/9844010 Triac 9844008
9223111	5W	3000K	300Lm	D 2.6 H 25	220-240Vac	-	On/Off Included Dali 9621523/9844010 Triac 9844008




Clarity

ESSENTIAL

- Trim and Trimless options




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	l _{out}	DRIVER
9232123	○ 7W	3000K	297Lm	D 2.7 H 11.8	220-240Vac	-	On/Off Included Dali 9621523
9232124	● 7W	3000K	297Lm	D 2.7 H 11.8	220-240Vac	-	Triac 9844008 (remote)



EASY INSTALLATION

DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	l _{out}	DRIVER
9232128	○ 7W	3000K	297Lm	D 2.7 H 11.8	220-240Vac	-	On/Off Included Dali 9621523
9232129	● 7W	3000K	297Lm	D 2.7 H 11.8	220-240Vac	-	Triac 9844008 (remote)




Cod

ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	l _{out}	DRIVER
9070139	● 5W	3000K	300Lm	D 3.2 H 18.62	220-240Vac	-	On/Off Included Dali 9844146



Otium



PRO

- Trimless
- CRI>97




EASY INSTALLATION

DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9030669 ○	7W	3000K	497Lm	D 5.5 H 16.5	19Vdc	350mA	On/Off 9030671
9030670 ●	7W	3000K	497Lm	D 5.5 H 16.5	19Vdc	350mA	Dali 9621523/9844010 Triac 9844008



EASY INSTALLATION

DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED




OPTIONAL ACCESSORIES

Lens 36°



9030674




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9030672 ○	7W	3000K	431Lm	D 5.5 H 8.4	19Vdc	350mA	On/Off 9030671
9030673 ●	7W	3000K	431Lm	D 5.5 H 8.4	19Vdc	350mA	Dali 9621523/9844010 Triac 9844008



Cortis

PRO




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232201 ○	5W	2700K	285Lm	D 9.2 H 8.2	220-240Vac	-	On/Off Incuded Dali 9621523 Triac 9844008
9232200 ○	5W	3000K	285Lm	D 9.2 H 8.2	220-240Vac	-	
9232203 ●	5W	2700K	285Lm	D 9.2 H 8.2	220-240Vac	-	
9232202 ●	5W	3000K	285Lm	D 9.2 H 8.2	220-240Vac	-	



Pulse

PRO

- Trim and Trimless options





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232205 ○	10W	2700K	878Lm	D 9.2 H 9	220-240Vac	-	On/Off Incuded Dali 9621523 Triac 9844008
9232204 ○	10W	3000K	878Lm	D 9.2 H 9	220-240Vac	-	
9232207 ●	10W	2700K	878Lm	D 9.2 H 9	220-240Vac	-	
9232206 ●	10W	3000K	878Lm	D 9.2 H 9	220-240Vac	-	



EASY INSTALLATION


DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232209 ○	10W	2700K	878Lm	D 13 H 9	220-240Vac	-	On/Off Incuded Dali 9621523 Triac 9844008
9232208 ○	10W	3000K	878Lm	D 13 H 9	220-240Vac	-	
9232211 ●	10W	2700K	878Lm	D 13 H 9	220-240Vac	-	
9232210 ●	10W	3000K	878Lm	D 13 H 9	220-240Vac	-	




Pin PRO




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	l _{out}	DRIVER
9232130 ○	12W	3000K	865Lm	D 8.4 H 18.6	220-240Vac	-	On/Off Included
9232131 ●	12W	3000K	865Lm	D 8.4 H 18.6	220-240Vac	-	Dali 9621523 Triac 9844008




Juno PRO




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	l _{out}	DRIVER
7770442 ○	15W	3000K	1189Lm	D 9.6 H 12-21	220-240Vac	-	On/Off Included
7770443 ●	15W	3000K	1189Lm	D 9.6 H 12-21	220-240Vac	-	Dali 9621523 Triac 9844019




Naruto ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	l _{out}	DRIVER
9530110 ○	15W	3000K	1295Lm	D 7.4 H 18.4	220-240Vac	-	On/Off Included
9530120 ●	15W	3000K	1295Lm	D 7.4 H 18.4	220-240Vac	-	Dali 9621523 Triac 9844019



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	l _{out}	DRIVER
9530130 ○	20W	3000K	1848Lm	D 9.2 H 22	220-240Vac	-	On/Off Included
9530140 ●	20W	3000K	1848Lm	D 9.2 H 22	220-240Vac	-	Dali 9621523 Triac 9844002





LINEAR
DOWNLIGHTS

Our **linear downlight range** offers a wide selection of **sizes, light colors,** and **optical solutions,** available in both **trim and trimless versions.** With **special lenses** for precise light control and uniform illumination, the range includes both **adjustable and fixed options** to suit various lighting requirements. Designed for seamless integration and clean architectural lines, these downlights are ideal for residential, commercial, and office environments where **versatility, performance,** and **aesthetic appeal** are essential.

Stealth

PRO




The **Linear Stealth Downlight** features **special lenses** designed for **accent lighting** and illuminating spaces where the **visibility of the light source should be minimal**. Its discreet design and precise optics make it perfect for creating subtle yet impactful lighting effects. Available in both trim and trimless versions, with black and white finishes, the range also includes an adjustable option for added flexibility—offering a sleek, versatile solution for refined architectural lighting.



TRIM




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9040117	● 5W	3000K	420Lm	L 6.4 W 2.8 H 3.8	220-240Vac	-	On/Off Included Dali 9844145
9040116	○ 5W	3000K	420Lm	L 6.4 W 2.8 H 3.8	220-240Vac	-	Triac 9621520 (remote)
9040119	● 8W	3000K	700Lm	L 10 W 2.8 H 3.8	220-240Vac	-	On/Off Included Dali 9621523
9040118	○ 8W	3000K	700Lm	L 10 W 2.8 H 3.8	220-240Vac	-	Triac 9844019 (remote)
9040121	● 15W	3000K	1400Lm	L 19 W 2.8 H 3.8	220-240Vac	-	On/Off Included Dali 9621523
9040120	○ 15W	3000K	1400Lm	L 19 W 2.8 H 3.8	220-240Vac	-	Triac 9844019 (remote)

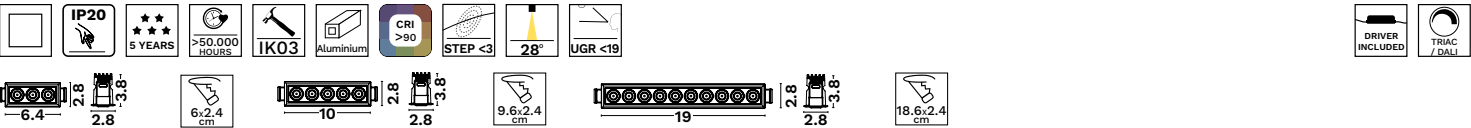

TRIMLESS



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9040122	○ 5W	3000K	420Lm	L 8.4 W 4.8 H 4	220-240Vac	-	On/Off Included Dali 9844145 Triac 9621520 (remote)
9040123	○ 8W	3000K	700Lm	L 12 W 4.8 H 4	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844019 (remote)
9040124	○ 15W	3000K	1400Lm	L 21 W 4.8 H 4	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844019 (remote)

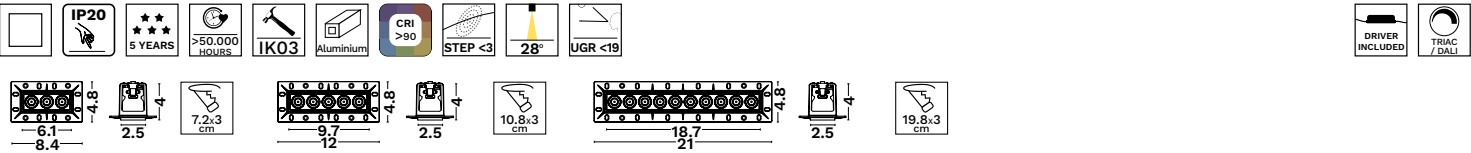


EASY INSTALLATION
DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED



ADJUSTABLE TRIM



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9040125	○ 5W	3000K	420Lm	L 7.3 W 4.5 H 4.8	220-240Vac	-	On/Off Included Dali 9844145 Triac 9621520 (remote)
9040126	○ 8W	3000K	700Lm	L 10.9 W 4.5 H 4.8	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844019 (remote)
9040127	○ 15W	3000K	1400Lm	L 20.1 W 4.5 H 4.8	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844019 (remote)

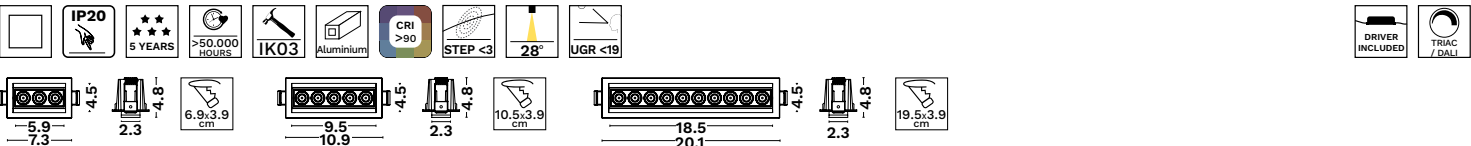

Gono
PRO



TRIM



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9844082 ○	6W	3000K	292Lm	L 7 W 3 H 4	220-240Vac	-	On/Off Included Dali 9844145 Triac 9621520 (remote)
9844083 ●	6W	3000K	292Lm	L 7 W 3 H 4	220-240Vac	-	
9844084 ○	11W	3000K	541Lm	L 11 W 3 H 4	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844002 (remote)
9844085 ●	11W	3000K	541Lm	L 11 W 3 H 4	220-240Vac	-	
9844086 ○	15W	3000K	818Lm	L 21 W 3 H 4	220-240Vac	-	
9844087 ●	15W	3000K	818Lm	L 21 W 3 H 4	220-240Vac	-	

>50.000 HOURS icon"/>

TRIMLESS



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9844088 ○	6W	3000K	292Lm	L 8.3 W 5 H 4	220-240Vac	-	On/Off Included Dali 9844145 Triac 9621520 (remote)
9844089 ○	11W	3000K	541Lm	L 12.3 W 5 H 4	220-240Vac	-	
9844090 ○	15W	3000K	818Lm	L 22.3 W 5 H 4	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844002 (remote)

>50.000 HOURS icon"/>

EASY INSTALLATION

DRIVER FITS INTO CUT-OUT DIAMETER & CAN BE REPLACED

ADJUSTABLE TRIM



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9844091 ○	6W	3000K	292Lm	L 7.4 W 4.4 H 4	220-240Vac	-	On/Off Included Dali 9844145 Triac 9621520 (remote)
9844092 ○	11W	3000K	541Lm	L 11.5 W 4.4 H 4	220-240Vac	-	
9844093 ○	15W	3000K	818Lm	L 21.5 W 4.4 H 4	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844002 (remote)

>50.000 HOURS icon"/>

Sorel

PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9050920 ○	7W	3000K	490Lm	L 6.2 W 6.2 H 6.8	20Vdc	350mA	On/Off 9020174 Dali 9621523/ 9844010 Triac 9844008
9065023 ○	14W	3000K	906Lm	L 11.5 W 6.2 H 6.8	40Vdc	350mA	On/Off 9020173 Dali 9621523 Triac 9844019
9065121 ○	21W	3000K	1.347Lm	L 15.5 W 6.2 H 6.8	60Vdc	350mA	On/Off 9020176



Swan

PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232126 ○	10W	3000K	849Lm	L 15 W 4.5 H 5.7	220-240Vac	-	On/Off Included
9232127 ●	10W	3000K	849Lm	L 15 W 4.5 H 5.7	220-240Vac	-	Dali 9621523
9232156 ●	10W	4000K	849Lm	L 15 W 4.5 H 5.7	220-240Vac	-	Triac 9844002 (remote)




Area

ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844051 ○	3W	2700K	111Lm	L 4.4 W 4.4 H 3.1	220-240Vac	-	On/Off Included
9844050 ○	3W	3000K	111Lm	L 4.4 W 4.4 H 3.1	220-240Vac	-	Dali 9844145
9844053 ○	6W	2700K	465Lm	L 9.2 W 4.4 H 3.1	220-240Vac	-	On/Off Included
9844052 ○	6W	3000K	465Lm	L 9.2 W 4.4 H 3.1	220-240Vac	-	Dali 9621523/9844010 Triac 9844019
9844054 ○	10W	2700K	669Lm	L 14.7 W 4.4 H 3.1	220-240Vac	-	On/Off Included
9844055 ○	10W	3000K	669Lm	L 14.7 W 4.4 H 3.1	220-240Vac	-	Dali 9621523/9844010 Triac 9844019

9844056 ○	20W	3000K	1334Lm	L 28 W 4.4 H 3.1	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844019
-----------	-----	-------	--------	------------------	------------	---	--



Canon
ESSENTIAL



TRIM




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9695174	● 6W	3000K	310Lm	L 7.1 W 3.2 H 4.3	220-240Vac	-	On/Off Included Dali 9844146
9695175	○ 6W	3000K	310Lm	L 7.1 W 3.2 H 4.3	220-240Vac	-	Triac 9844008 (remote)
9695176	● 8W	3000K	401Lm	L 11.2 W 3.2 H 4.3	220-240Vac	-	On/Off Included Dali 9621523 / 9844010
9695177	○ 8W	3000K	401Lm	L 11.2 W 3.2 H 4.3	220-240Vac	-	Triac 9844008 (remote)
9695178	● 14W	3000K	806Lm	L 21 W 3.2 H 4.3	220-240Vac	-	On/Off Included Dali 9621523
9695179	○ 14W	3000K	806Lm	L 21 W 3.2 H 4.3	220-240Vac	-	Triac 9844019 (remote)



TRIMLESS



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9695180	● 6W	3000K	310Lm	L 9.2 W 5.3 H 4.3	220-240Vac	-	On/Off Included Dali 9844146
9695181	○ 6W	3000K	310Lm	L 9.2 W 5.3 H 4.3	220-240Vac	-	Triac 9844008 (remote)
9695182	● 8W	3000K	401Lm	L 13.2 W 5.3 H 4.3	220-240Vac	-	On/Off Included Dali 9621523 / 9844010
9695183	○ 8W	3000K	401Lm	L 13.2 W 5.3 H 4.3	220-240Vac	-	Triac 9844008 (remote)
9695184	● 14W	3000K	806Lm	L 23.2 W 5.3 H 4.3	220-240Vac	-	On/Off Included Dali 9621523
9695185	○ 14W	3000K	806Lm	L 23.2 W 5.3 H 4.3	220-240Vac	-	Triac 9844019 (remote)




EASY INSTALLATION
DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED



ADJUSTABLE TRIM



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9695186	● 6W	3000K	310Lm	L 7.7 W 4.5 H 4.3	220-240Vac	-	On/Off Included Dali 9844146
9695187	○ 6W	3000K	310Lm	L 7.7 W 5.3 H 4.3	220-240Vac	-	Triac 9844008 (remote)
9695188	● 8W	3000K	401Lm	L 11.7 W 5.3 H 4.3	220-240Vac	-	On/Off Included Dali 9621523 / 9844010
9695189	○ 8W	3000K	401Lm	L 11.7 W 5.3 H 4.3	220-240Vac	-	Triac 9844008 (remote)
9695190	● 14W	3000K	806Lm	L 21.7 W 4.5 H 4.3	220-240Vac	-	On/Off Included Dali 9621523
9695191	○ 14W	3000K	806Lm	L 21.7 W 4.5 H 4.3	220-240Vac	-	Triac 9844019 (remote)



Akira

ESSENTIAL



TRIM



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9070141	○ 3W	3000K	169Lm	L 4.5 W 4.5 H 4.9	220-240Vac	-	On/Off Included Dali 9844145 Triac 9621520
9070142	○ 5W	3000K	368Lm	L 7.5 W 4.5 H 4.9	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844002
9070143	○ 11W	3000K	804Lm	L 14.7 W 4.5 H 4.9	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844002

TRIMLESS



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9070151	○ 3W	3000K	169Lm	L 4.1 W 7.2H 4.9	220-240Vac	-	On/Off Included Dali 9844145 Triac 9621520
9070152	○ 5W	3000K	368Lm	L 7.1 W 7.2 H 4.9	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844002
9070153	○ 11W	3000K	804Lm	L 14.3 W 7.2 H 4.9	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844002

Cantia

ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9070131	○ 8W	3000K	710Lm	L 19 W 8.2 H 8.8	220-240Vac	-	On/Off Included Dali 9844146 Triac 9844008
9070132	○ 15W	3000K	1350Lm	L 32.2 W 8.2 H 8.8	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844019
9070133	○ 22W	3000K	2025Lm	L 46 W 8.2 H 8.8	220-240Vac	-	On/Off Included Dali 9621521 Triac 9844002
9070134	○ 30W	3000K	2700Lm	L 59.5 W 8.2 H 8.8	220-240Vac	-	On/Off Included Dali 9621522 Triac 9844002



GU10

DOWNLIGHTS

Our extensive range of **GU10 trims** is designed to offer both **style and versatility**, making it suitable for a wide variety of lighting applications. Crafted with **high-quality materials**, these trims are available in a range of **modern and classic colors**, allowing seamless integration into any interior design—from minimalist residential spaces to sophisticated commercial settings. Many options in the range are compatible with next-generation GU10 LED modules. For more demanding environments, the range also includes **IP65-rated solutions**, ensuring durability and protection in wet or outdoor areas.

Spezia

PRO

- Compatible with MR16 lamps
- CRI>97



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9110124 ●	10W	2700K	909Lm	D 5 H 6.6	18Vdc	500mA	On/Off 9020171
9030798 ●	10W	3000K	909Lm	D 5 H 6.6	18Vdc	500mA	Dali 9621523
9030799 ●	10W	4000K	943Lm	D 5 H 6.6	18Vdc	500mA	Triac 9844008



Spezia is our **compatible light source** which offers a perfect blend of **high quality, exceptional performance,** and **competitive pricing.** With a **CRI of 98**, they deliver outstanding color accuracy, making them ideal for applications where true-to-life color rendering is essential. Designed for easy integration with GU10 trims, these light sources provide a **reliable, energy-efficient,** and **cost-effective** solution without compromising on light quality.



CODE 9030794 ○ 9030795 ● DIMENSIONS (cm)
D 6.2 H 4.5

WATT
Max 10W

VOLTAGE
220-240Vac



CODE 9030796 ○ 9030797 ● DIMENSIONS (cm)
D 7.4 H 4

WATT
Max 10W

VOLTAGE
220-240Vac



CODE 9030790 ○ 9030791 ● DIMENSIONS (cm)
D 9.2 H 4

WATT
Max 10W

VOLTAGE
220-240Vac



CODE 9030792 ○ 9030793 ● DIMENSIONS (cm)
W 7.5 L 7.5 H 3.8

WATT
Max 10W

VOLTAGE
220-240Vac



Cadmo



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9707701 ●	12W	3000K	1074Lm	D 5.2 H 5.4	40Vdc	250 mA	On/Off 9712102 Dali 9621523 Triac 9844019



OPTIONAL ACCESSORIES

HONEYCOMB

9712101



CODE DIMENSIONS (cm)
9701001 ○ 9701002 ● D 9 H 4.5

WATT
Max 10W

VOLTAGE
220-240Vac



Mea



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
62000 ●	9W	3000K	800Lm	D 5 H 6	36Vdc	250 mA	On/Off 9011763/6001/64001 Dali 9621523 Triac 9844019




OPTIONAL ACCESSORIES

GU10 HOLDER

820610

9011531

CODE DIMENSIONS (cm)
94500 ● 62202 ○ 62221 ● D 8.2 H 2.2



OPTIONAL ACCESSORIES

GU10 HOLDER

820610

9011531

CODE DIMENSIONS (cm)
62200 ○ 62201 ● D 8.2 H 2.2



OPTIONAL ACCESSORIES

GU10 HOLDER

820610

9011531

CODE DIMENSIONS (cm)
62018 ○ 62019 ● D 8.2 H 2.2





DOWNLIGHTS - GU10




Brad

CODE
9017402 ○ 9017403 ● D 5.5 H 4.5

WATT
Max 10W

VOLTAGE
220-240Vac




Inlet

CODE
9011476 ○ 9011475 ●
9011477 ● D 7.5 H 2.7

WATT
Max 10W

VOLTAGE
220-240Vac

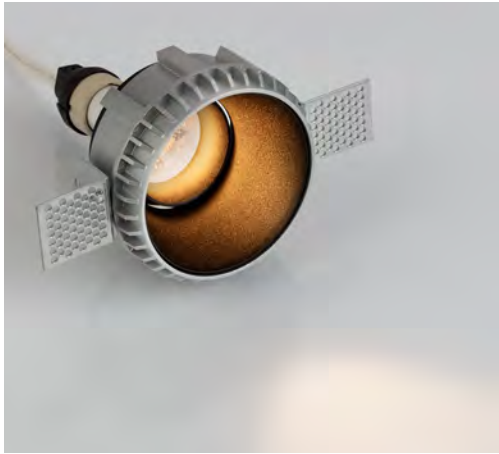

Brad

CODE
9017391 ○ 9017392 ● D 8.1 H 5.1

WATT
Max 10W

VOLTAGE
220-240Vac



CODE
9000351 ○ 9000352 ● W 8.8 L 8.8 H 6.2

WATT
Max 10W

VOLTAGE
220-240Vac





Kido

CODE
9174151 ○ 9174152 ●
9011546 ○ 9011547 ● D 6.8 H 5

WATT
Max 10W

VOLTAGE
220-240Vac



Punk

CODE
9011479 ○ 9011478 ●
9011480 ○ 9011481 ● D 8.1 H 4.4

WATT
Max 10W

VOLTAGE
220-240Vac



Moal

CODE
9011485 ○ 9011484 ●
9011486 ● 9011487 ○ D 6.8 H 5

WATT
Max 10W

VOLTAGE
220-240Vac



Stardust

CODE
9011358 ○ 9011369 ○
9011359 ○ 9011360 ● D 8.5 H 5.5

WATT
Max 10W

VOLTAGE
220-240Vac



Carree

CODE
9011491 ○ 9011490 ● D 6.9 H 2.7

WATT
Max 10W

VOLTAGE
220-240Vac



Contra

CODE
9011492 ○ 9011493 ● D 8.9 H 8.5

WATT
Max 10W

VOLTAGE
220-240Vac



Hap

CODE
9030410 ○ 9030411 ● D 7 H 2.5

WATT
Max 10W

VOLTAGE
220-240Vac






Crib

CODE 9540219 ○ 9540220 ● D 9 H 3.5

WATT
Max 10W

VOLTAGE
220-240Vac



Enzo

CODE 834801 ○ 834802 ● D 9.2 H 2.5

WATT
Max 10W

VOLTAGE
220-240Vac



Texture

CODE 9011544 ○ 9011545 ● D 9 H 4.5

WATT
Max 10W

VOLTAGE
220-240Vac



Take

CODE 9350444 ○ 9350443 ● D 9.2 H 4.2

WATT
Max 10W

VOLTAGE
220-240Vac



Redo

CODE 9418501 ○ 9418502 ● D 9.8 H 2.5

WATT
Max 10W

VOLTAGE
220-240Vac



OPTIONAL ACCESSORIES

LAMP HOLDER

820608 / 820609



Rende

CODE 9012191 ○ 9012192 ● DIMENSIONS (cm)
L 7.5 W 7.5 H 4.5

WATT
Max 10W

VOLTAGE
220-240Vac



Cedi

CODE 9430124 ○ 9430125 ● DIMENSIONS (cm)
D 10 H 3.8

WATT
Max 10W

VOLTAGE
220-240Vac



CODE 9012201 ○ 9012202 ● DIMENSIONS (cm)
L 15 W 7.5 H 4.5

WATT
Max 10W

VOLTAGE
220-240Vac



CODE 9430241 ○ 9430242 ● DIMENSIONS (cm)
L 10 W 10 H 3.5

WATT
Max 10W

VOLTAGE
220-240Vac



CODE 9430551 ○ 9430552 ● DIMENSIONS (cm)
L 18.3 W 10 H 3.5

WATT
Max 10W

VOLTAGE
220-240Vac



OPTIONAL ACCESSORIES

Honeycomb



94992

Softening Lens



94991



Boli

CODE 9011542 ○ 9011543 ● DIMENSIONS (cm) D 8 H 6

WATT Max 10W

VOLTAGE 220-240Vac



Certa

CODE 9011538 ○ 9011539 ● 9011540 ○ 9011541 ● DIMENSIONS (cm) D 8 H 6

WATT Max 10W

VOLTAGE 220-240Vac



Quad

CODE 9011494 ● 9011495 ○ DIMENSIONS (cm) D 8.5 H 6.5

WATT Max 10W

VOLTAGE 220-240Vac



Brook

CODE 9030422 ○ 9030423 ● DIMENSIONS (cm) D 9.6 H 7.8

WATT Max 10W

VOLTAGE 220-240Vac



Brook

CODE 9030424 ○ 9030425 ● DIMENSIONS (cm) L 9.6 W 9.6 H 7.8

WATT Max 10W

VOLTAGE 220-240Vac





Tex

CODE
9012121 ○ 9012122 ●

DIMENSIONS (cm)
D 9.3 H 3.8

WATT
Max 10W

VOLTAGE
220-240Vac



Ceid

CODE
9011488 ● 9011489 ○

DIMENSIONS (cm)
D 8.6 H 4.5

WATT
Max 10W

VOLTAGE
220-240Vac





Doherty

CODE
9011317 ○ 9011318 ●
9011319 ●

DIMENSIONS (cm)
D 9.25 H 3.55

WATT
Max 10W

VOLTAGE
220-240Vac

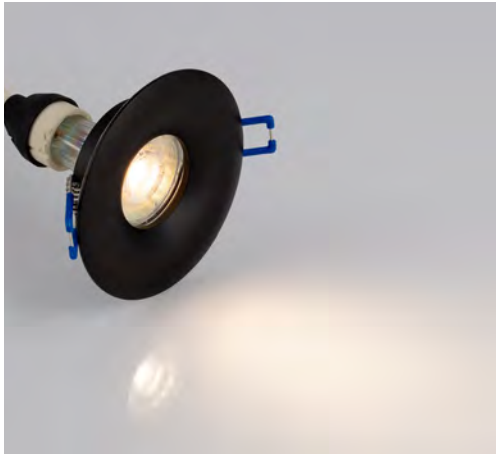


Antalya

CODE
9011354 ○ 9011355 ●

DIMENSIONS (cm)
D 9.8 H 2.5

WATT
Max 10W

VOLTAGE
220-240Vac

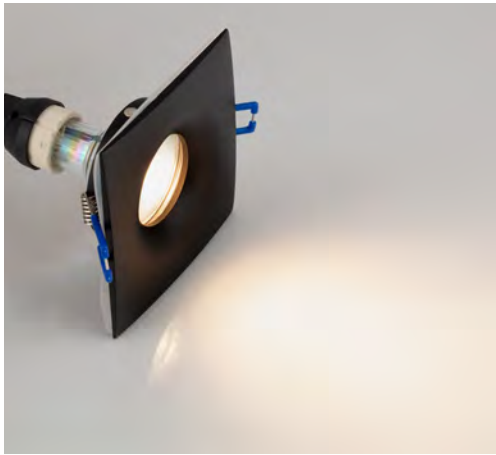

CODE
9011356 ○ 9011357 ●

DIMENSIONS (cm)
L 9.8 W 9.8 H 2.5

WATT
Max 10W

VOLTAGE
220-240Vac



Lyric

- Trimless



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9060259 ○	3W	3000K	220Lm	L 12 W 12 H 6.7	220-240Vac	-	On/Off Included Dali 9844145 Triac 9844008



EASY INSTALLATION

DRIVER FITS INTO
CUT-OUT DIAMETER
& CAN BE REPLACED



- Trimless



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9060260 ○	2x3W	3000K	440Lm	L 21 W 12 H 6.7	220-240Vac	-	On/Off Included (2pcs) Dali 9844146 Triac 9844008



DOWNLIGHTS - GU10

Mib

CODE
9079601 ○

DIMENSIONS (cm)
L 13 W 13 H 5.8

WATT
Max 10W

VOLTAGE
220-240Vac





CODE
9079600 ○

DIMENSIONS (cm)
L 25.2 W 13.6 H 5.8

WATT
Max 10W

VOLTAGE
220-240Vac



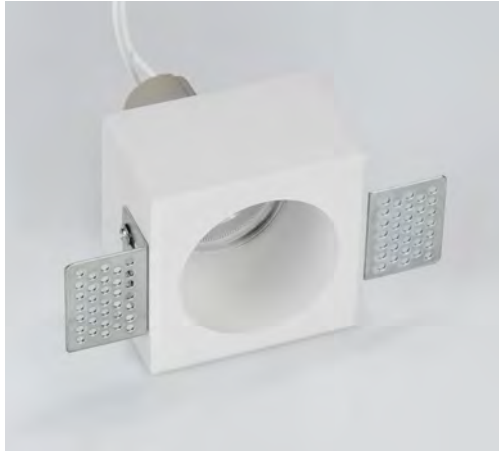


CODE
9879109 ○

DIMENSIONS (cm)
L 8 W 8 H 5.2

WATT
Max 10W

VOLTAGE
220-240Vac

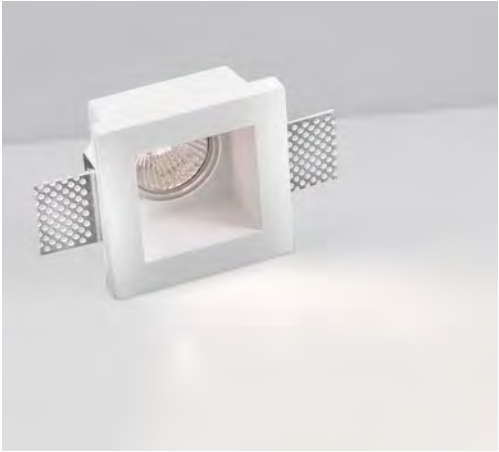

CODE
9879110 ○

DIMENSIONS (cm)
L 8 W 8 H 5.2

WATT
Max 10W

VOLTAGE
220-240Vac




CODE
9879111 ○

DIMENSIONS (cm)
D 9.2 H 5.2

WATT
Max 10W

VOLTAGE
220-240Vac

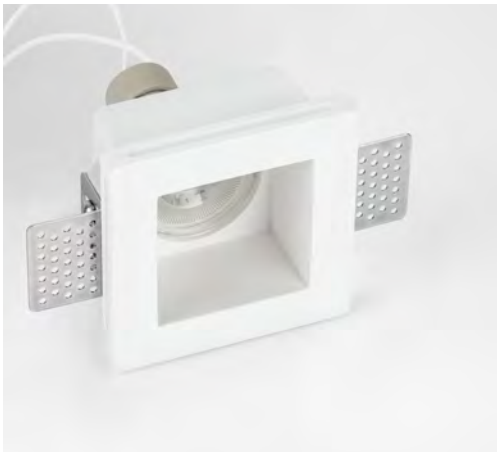


CODE
9879113 ○

DIMENSIONS (cm)
L 9.5 W 9.5 H 5.2

WATT
Max 10W

VOLTAGE
220-240Vac



CODE
9879112 ○

DIMENSIONS (cm)
L 9.5 W 9.5 H 5

WATT
Max 10W

VOLTAGE
220-240Vac



CODE
9879108 ○

DIMENSIONS (cm)
D 10.3 H 3

WATT
Max 10W

VOLTAGE
220-240Vac



CODE
9879107 ○

DIMENSIONS (cm)
L 10 W 10 H 2.5

WATT
Max 10W

VOLTAGE
220-240Vac



OPTIONAL ACCESSORIES

Acrylic Ring for all GU10



9879114




Gol

CODE
9879105 ○

DIMENSIONS (cm)
D 12 H 4.3

WATT
Max 10W

VOLTAGE
220-240Vac




Inset

CODE
9879103 ○

DIMENSIONS (cm)
D 13 H 19

WATT
Max 10W

VOLTAGE
220-240Vac



CODE
9879104 ○

DIMENSIONS (cm)
L 12 W 12 H 4.5

WATT
Max 10W

VOLTAGE
220-240Vac



CODE
9879101 ○

DIMENSIONS (cm)
L 12 W 12 H 5.5

WATT
Max 10W

VOLTAGE
220-240Vac



CODE
9079500 ○

DIMENSIONS (cm)
L 24 W 12 H 13

WATT
Max 10W

VOLTAGE
220-240Vac



CODE
61853201 ○

DIMENSIONS (cm)
L 21.4 W 11.7 H 6

WATT
Max 10W

VOLTAGE
220-240Vac



CODE
9879102 ○

DIMENSIONS (cm)
L 12 W 12 H 5.2

WATT
Max 10W

VOLTAGE
220-240Vac





Vitale

CODE
41849401 ○

DIMENSIONS (cm)
D 20 H 8.5

WATT
Max 10W

VOLTAGE
220-240Vac



CODE
41849601 ○

DIMENSIONS (cm)
L 20 W 20 H 8.5

WATT
Max 10W

VOLTAGE
220-240Vac



Crate

CODE
9091631 ○

DIMENSIONS (cm)
D 12 H 6


WATT
Max 10W

VOLTAGE
220-240Vac



OPTIONAL ACCESSORIES

Reflectors



CODE
9090621 ○

DIMENSIONS (cm)
L 12 W 12 H 6


WATT
Max 10W

VOLTAGE
220-240Vac



OPTIONAL ACCESSORIES

Reflectors





COMMERCIAL
DOWNLIGHTS



Our **commercial lighting range** offers a wide selection of **downlights** with **changeable CCT**, **interchangeable light sources**, and a **sleek, efficient design**. Built to meet the **specific demands of commercial environments**, these fixtures provide **high efficiency**, **excellent light quality**, and options with **low UGR** for visual comfort—delivering the perfect balance of **power, performance**, and **aesthetics** for offices, retail, and public spaces.

Oblio

PRO



Oblio is our innovative **interchangeable socket system**, designed to offer **maximum flexibility** in lighting design. It allows for quick and easy changes to the **light source**, **beam angle**, or **inner trim** to suit specific project needs. As part of a **versatile product family**, Oblio elements can be seamlessly combined across various fixtures, enabling effortless customization. With beam options ranging from **narrow** to **wide** and even **wallwash**, it adapts to any application. Thanks to its **high power and efficiency**, Oblio is also a reliable solution for effectively illuminating **demanding commercial spaces**.

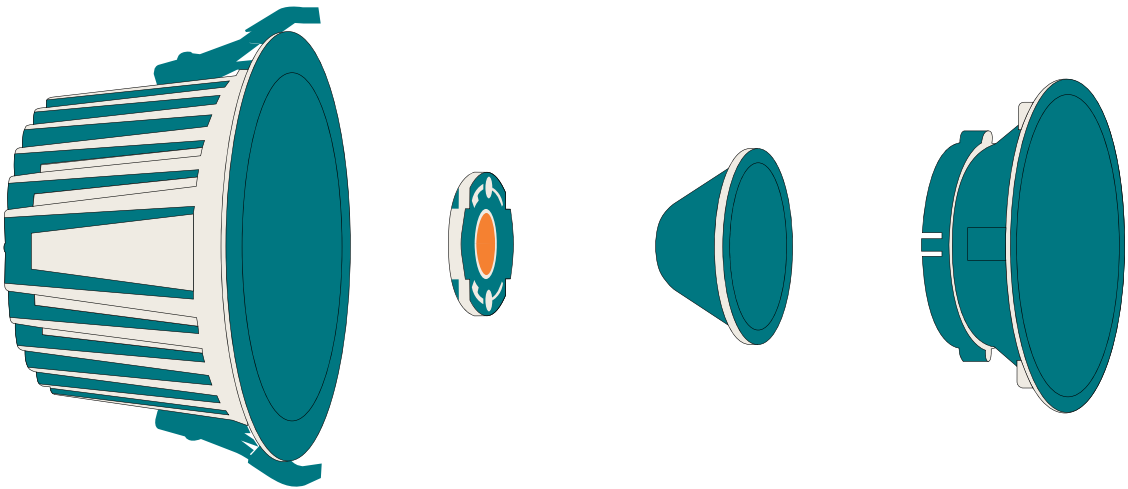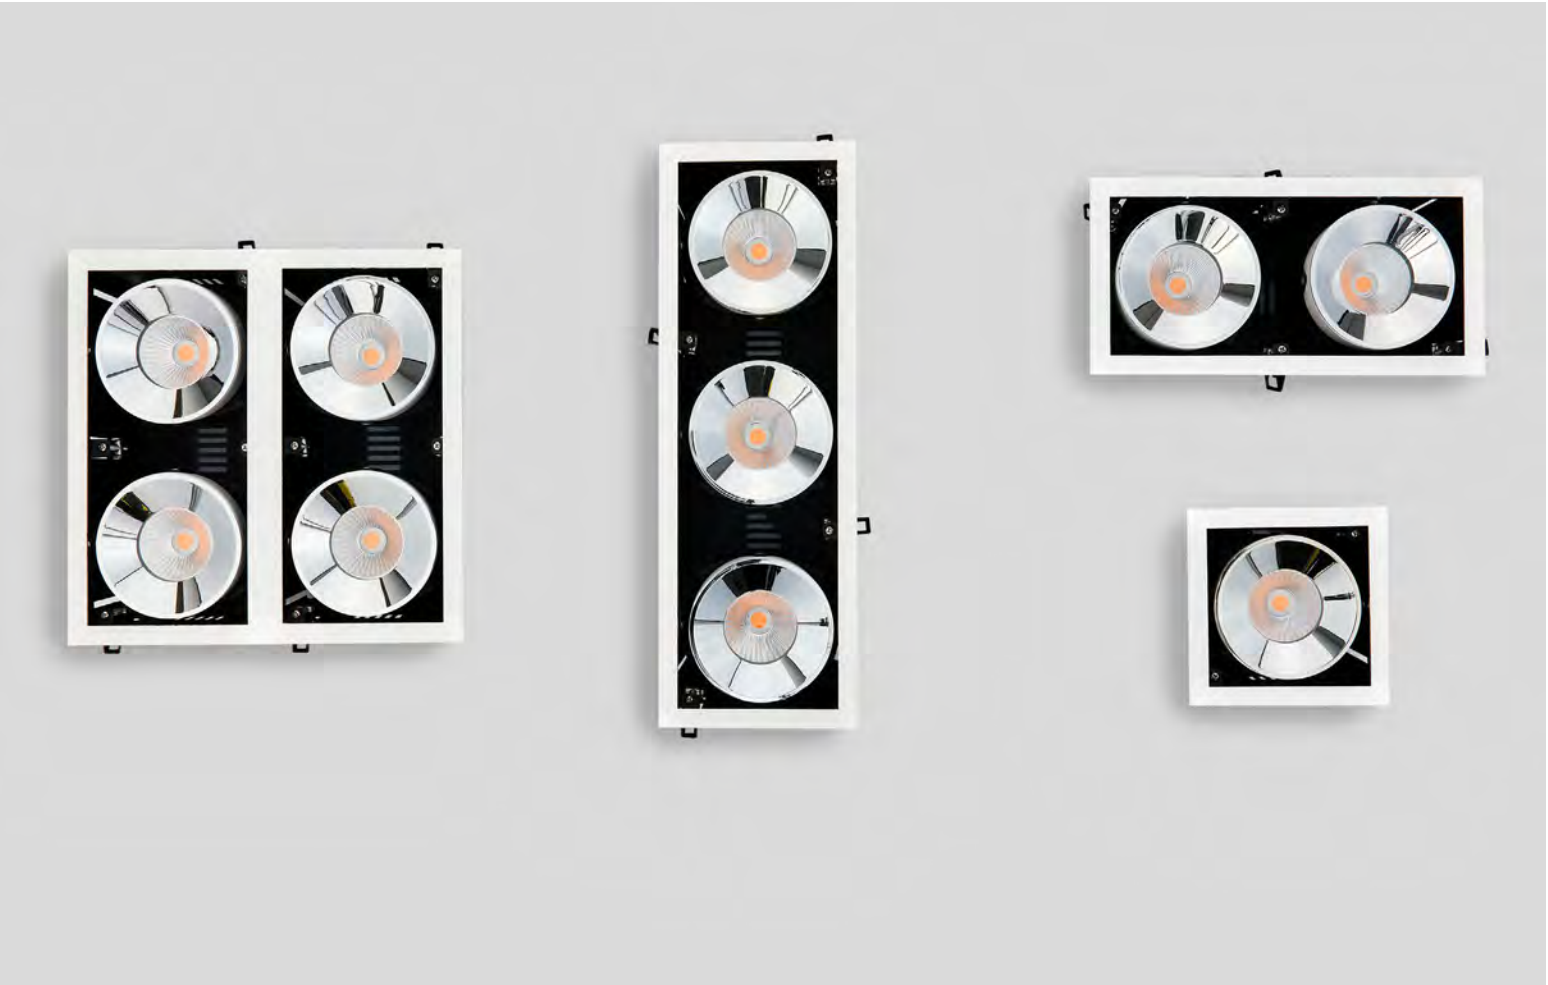

DOWNLIGHTS - COMMERCIAL							
TRIM							
	WATT	CCT	BEAM	LUMEN	CODES	REFLECTOR	DRIVER
  	20W	3000K	20°	1337Lm	9030870 + 9030871	9030873	On/Off Included Dali 9621523 Triac 9844002
			40°	1337Lm	9030870		
			60°	1337Lm	9030870 + 9030872		
			WALLWASH 45°	1337Lm	9030870 + 9030885		
		4000K	20°	1409Lm	9030870 + 9030874 + 9030871		
			40°	1409Lm	9030870 + 9030874		
			60°	1409Lm	9030870 + 9030874 + 9030872		
		WALLWASH 45°	1409Lm	9030870 + 9030874 + 9030885			
  	28W	3000K	20°	1827Lm	9030875 + 9030876	9030878	On/Off Included Dali 9621521 Triac 9844002
			40°	1827Lm	9030875		
			60°	1827Lm	9030875 + 9030877		
			WALLWASH 45°	1827Lm	9030875 + 9030886		
		4000K	20°	2060Lm	9030875 + 9030879 + 9030876		
			40°	2060Lm	9030875 + 9030879		
			60°	2060Lm	9030875 + 9030879 + 9030877		
		WALLWASH 45°	2060Lm	9030875 + 9030879 + 9030886			
  	40W	3000K	20°	2640Lm	9030880 + 9030881	9030883	On/Off Included Dali 9621522
			40°	2640Lm	9030880		
			60°	2640Lm	9030880 + 9030882		
			WALLWASH 45°	2640Lm	9030880 + 9030887		
		4000K	20°	2720Lm	9030880 + 9030884 + 9030881		
			40°	2720Lm	9030880 + 9030884		
			60°	2720Lm	9030880 + 9030884 + 9030882		
		WALLWASH 45°	2720Lm	9030880 + 9030884 + 9030887			

ADJUSTABLE TRIM

	WATT	CCT	BEAM	LUMEN	CODES	REFLECTOR	DRIVER
  	28W	3000K	20°	1921Lm	9030888 + 9030871	9030873	On/Off Included Dali 9621521 Triac 9844002
			40°	1921Lm	9030888		
			60°	1921Lm	9030888 + 9030872		
			WALLWASH 45°	1921Lm	9030888 + 9030885		
		4000K	20°	1921Lm	9030888 + 9030874 + 9030871		
			40°	1921Lm	9030888 + 9030874		
			60°	1921Lm	9030888 + 9030874 + 9030872		
			WALLWASH 45°	1921Lm	9030888 + 9030874 + 9030885		
  	36W	3000K	20°	2477Lm	9030889 + 9030876	9030878	On/Off Included Dali 9621522
			40°	2477Lm	9030889		
			60°	2477Lm	9030889 + 9030877		
			WALLWASH 45°	2477Lm	9030889 + 9030886		
		4000K	20°	2477Lm	9030889 + 9030879 + 9030876		
			40°	2477Lm	9030889 + 9030879		
			60°	2477Lm	9030889 + 9030879 + 9030877		
			WALLWASH 45°	2477Lm	9030889 + 9030879 + 9030886		

DOWNLIGHTS - COMMERCIAL								
	WATT	CCT	BEAM	LUMEN	CODES	REFLECTOR	DRIVER	
   	28W	3000K	20°	1921Lm	9030890 + 9030876	9030878	On/Off Included Dali 9621521 Triac 9844002	
			40°	1921Lm	9030890			
			60°	1921Lm	9030890 + 9030877			
		WALLWASH 45°			1921Lm			9030890 + 9030886
		4000K	20°	1921Lm	9030890 + 9030879 + 9030876			
			40°	1921Lm	9030890 + 9030879			
			60°	1921Lm	9030890 + 9030879 + 9030877			
			WALLWASH 45°					1921Lm
		   	56W	3000K	20°			3842Lm
40°	3842Lm				9030891			
60°	3842Lm				9030891 + 2x9030877			
WALLWASH 45°				3842Lm	9030891 + 2x9030886			
4000K	20°			3842Lm	9030891 + 2x9030879 + 2x9030876			
	40°			3842Lm	9030891 + 2x9030879			
	60°			3842Lm	9030891 + 2x9030879 + 2x9030877			
	WALLWASH 45°			3842Lm	9030891 + 2x9030879 + 2x9030886			
   	84W			3000K	20°	5763Lm	9030892 + 3x9030876	3x9030878
		40°	5763Lm		9030892			
		60°	5763Lm		9030892 + 3x9030877			
		WALLWASH 45°			5763Lm	9030892 + 3x9030886		
		4000K	20°	5763Lm	9030892 + 3x9030879 + 3x9030876			
			40°	5763Lm	9030892 + 3x9030879			
			60°	5763Lm	9030892 + 3x9030879 + 3x9030877			
			WALLWASH 45°			5763Lm	9030892 + 3x9030879 + 3x9030886	
		   	112W	3000K	20°	7684Lm	9030893 + 4x9030876	
40°	7684Lm				9030893			
60°	7684Lm				9030893 + 4x9030877			
WALLWASH 45°				7684Lm	9030893 + 4x9030886			
4000K	20°			7684Lm	9030893 + 4x9030879 + 4x9030876			
	40°			7684Lm	9030893 + 4x9030879			
	60°			7684Lm	9030893 + 4x9030879 + 4x9030877			
	WALLWASH 45°			7684Lm	9030893 + 4x9030879 + 4x9030886			



Radius

PRO

- Switch for three CCT options




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540305	30W	3000K/4000K/5000K	2918Lm	D 19 H 12	220-240Vac	-	On/Off Included Dali 9621521 Triac 9540320




Spark


PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540306	18W	4000K	2003Lm	D 14.5 H 6.5	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844002/9540319




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540307	25W	4000K	2760Lm	D 19 H 7.5	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844002/9540320




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540308	30W	4000K	3608Lm	D 22.5 H 8.7	220-240Vac	-	On/Off Included Dali 9621521 Triac 9540320



Glim
PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540309 ○	25W	4000K	2889Lm	D 14 H 6.5	220-240Vac	-	On/Off Included Dali 9621521 Triac 9844002/9540320



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540310 ○	35W	4000K	3902Lm	D 18 H 8.1	220-240Vac	-	On/Off Included Dali 9621522 Triac 9540321



Vulcan
ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844032 ○	20W	2700K	1286Lm	D 10.5 H 7	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844002
9844033 ○	20W	3000K	1286Lm	D 10.5 H 7	220-240Vac	-	



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844034 ○	30W	2700K	2297Lm	D 13 H 8.7	220-240Vac	-	On/Off Included Dali 9621521 Triac 9844002
9844035 ○	30W	3000K	2297Lm	D 13 H 8.7	220-240Vac	-	



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844036 ○	40W	3000K	3433Lm	D 15 H 9.6	220-240Vac	-	On/Off Included Dali 9621522



Vessel

PRO

- IP54
- Dip switch for three CCT options

OPTIONAL ACCESSORIES

Reflector (2 pcs/pack)




9540303



9540304



-14.8-



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540302 ○	24W	3000K/4000K/5700K	3019Lm	D 19 H 6.1	220-240Vac	-	On/Off Included Dali 9621521 Triac 9844002/9540319









Lox

ESSENTIAL

- IP54



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232244 ○	10W	3000K	847Lm	D 8.3 H 6.5	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844008
9232245 ○	10W	4000K	885Lm	D 8.3 H 6.5	220-240Vac	-	
9232246 ○	15W	3000K	1095Lm	D 8.3 H 6.5	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844019
9232247 ○	15W	4000K	1120Lm	D 8.3 H 6.5	220-240Vac	-	







CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232248 ○	25W	3000K	2384Lm	D 10.3 H 7.5	220-240Vac	-	On/Off Included Dali 9621521 Triac 9844002
9232249 ○	25W	4000K	2410Lm	D 10.3 H 7.5	220-240Vac	-	







CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232250 ○	35W	3000K	3388Lm	D 13.2 H 7.5	220-240Vac	-	On/Off Included Dali 9621522
9232251 ○	35W	4000K	3410Lm	D 13.2 H 7.5	220-240Vac	-	







Fati

PRO

- Microprismatic



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844064 ●	14W	3000K	1212Lm	D 13.6 H 5.7	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844019
9844066 ●	14W	4000K	1212Lm	D 13.6 H 5.7	220-240Vac	-	
9844065 ○	14W	3000K	1373Lm	D 13.6 H 5.7	220-240Vac	-	
9844067 ○	14W	4000K	1373Lm	D 13.6 H 5.7	220-240Vac	-	




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844068 ●	23W	3000K	2193Lm	D 17.6 H 6	220-240Vac	-	On/Off Included Dali 9621521 Triac 9844002
9844070 ●	23W	4000K	2193Lm	D 17.6 H 6	220-240Vac	-	
9844069 ○	23W	3000K	2210Lm	D 17.6 H 6	220-240Vac	-	
9844071 ○	23W	4000K	2210Lm	D 17.6 H 6	220-240Vac	-	





Dine

PRO

- Dip switch for three CCT options
- Microprismatic
- IP54



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540311 ○	18W	3000K/4000K/5000K	2094Lm	D 14.5 H 5	220-240Vac	-	On/Off Included Dali 9621523 Triac 9844002/9540319




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540312 ○	25W	3000K/4000K/5000K	2894Lm	D 19 H 5	220-240Vac	-	On/Off Included Dali 9621521 Triac 9844002/9540320




Urby


ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9248064	9W	3000K	606Lm	D 12.9 H 5.6	220-240Vac	-	On/Off Included
9248067	9W	4000K	640Lm	D 12.9 H 5.6	220-240Vac	-	Dali 9621523/9844010 Triac 9844008



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9248065	15W	3000K	1214Lm	D 16.4 H 6.1	220-240Vac	-	On/Off Included
9248068	15W	4000K	1240Lm	D 16.4 H 6.1	220-240Vac	-	Dali 9621523 Triac 9844019




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9248066	24W	3000K	1847Lm	D 18.7 H 6.5	220-240Vac	-	On/Off Included
9248069	24W	4000K	1863Lm	D 18.7 H 6.5	220-240Vac	-	Dali 9621521 Triac 9844002



Hermit

ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9050800	18W	3000K	1440Lm	D 22.2 H 2.58	220-240Vac	-	On/Off Included
9050801	18W	4000K	1460Lm	D 22.2 H 2.58	220-240Vac	-	
9050802	24W	3000K	1920Lm	D 22.2 H 2.58	220-240Vac	-	
9050803	24W	4000K	1940Lm	D 22.2 H 2.58	220-240Vac	-	



OPTIONAL ACCESSORIES

Surface


9050804

-22.7-



Perfect

- TW with remote control



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9060500 ○	24W	3000K	1440Lm	D 40 H 12	220-240Vac	Triac
9058123 ○	24W	2700K-6000K	1200Lm	D 40 H 12	220-240Vac	TW
9060600 ●	24W	3000K	1440Lm	D 40 H 12	220-240Vac	Triac
9058124 ●	24W	2700K-6000K	1200Lm	D 40 H 12	220-240Vac	TW



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9060700 ○	40W	3000K	2400Lm	D 60 H 12	220-240Vac	Triac
9058125 ○	40W	2700K-6000K	1900Lm	D 60 H 12	220-240Vac	TW
9060800 ●	40W	3000K	2400Lm	D 60 H 12	220-240Vac	Triac
9058126 ●	40W	2700K-6000K	1900Lm	D 60 H 12	220-240Vac	TW



INCLUDED





Remote Control
for Changing CCT & Dimming

9058127



Perfect

- TW with remote control



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9058920 ○	24W	3000K	1440Lm	D 40 H 12.5	220-240Vac	Triac
9058111 ○	24W	2700K-6000K	1200Lm	D 40 H 12.5	220-240Vac	TW
9058930 ●	24W	3000K	1440Lm	D 40 H 12.5	220-240Vac	Triac
9058112 ●	24W	2700K-6000K	1200Lm	D 40 H 12.5	220-240Vac	TW



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9058940 ○	40W	3000K	2400Lm	D 60 H 12.5	220-240Vac	Triac
9058113 ○	40W	2700K-6000K	1900Lm	D 60 H 12.5	220-240Vac	TW
9058950 ●	40W	3000K	2400Lm	D 60 H 12.5	220-240Vac	Triac
9058114 ●	40W	2700K-6000K	1900Lm	D 60 H 12.5	220-240Vac	TW



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9058960 ○	80W	3000K	4800Lm	D 80 H 12.5	220-240Vac	Triac
9058115 ○	80W	2700K-6000K	4000Lm	D 80 H 12.5	220-240Vac	TW
9058970 ●	80W	3000K	4800Lm	D 80 H 12.5	220-240Vac	Triac
9058116 ●	80W	2700K-6000K	4000Lm	D 80 H 12.5	220-240Vac	TW




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9058980 ○	120W	3000K	7200Lm	D 100 H 12.5	220-240Vac	Triac
9058117 ○	120W	2700K-6000K	5760Lm	D 100 H 12.5	220-240Vac	TW
9058990 ●	120W	3000K	7200Lm	D 100 H 12.5	220-240Vac	Triac
9058118 ●	120W	2700K-6000K	5760Lm	D 100 H 12.5	220-240Vac	TW



Led Panel

ESSENTIAL




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540317	36W	4000K	3809Lm	L 59.5 W 59.5 H 2.5	220-240Vac	-	On/Off Included Dali 9621522




Led Panel

PRO

- Microprismatic
- UGR<17



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9540318	36W	4000K	3972Lm	L 59.5 W 59.5 H 2.5	220-240Vac	-	On/Off Included Dali 9621522




CEILING
140----187

Pages

Our **ceiling light range** is designed to combine **elegant design** with **high-performance lighting technology**, offering a premium solution for both residential and commercial spaces. With features like **CRI>98** for exceptional color accuracy, **adjustable field beam angles** for flexible light distribution, and a variety of **optical options** to suit different applications, these fixtures deliver both functionality and visual comfort. Available in a **wide range of colors and finishes**, our ceiling lights can seamlessly complement any interior while providing **precise, high-quality illumination**.

LED
GU10

Page 142-175
Page 176-187

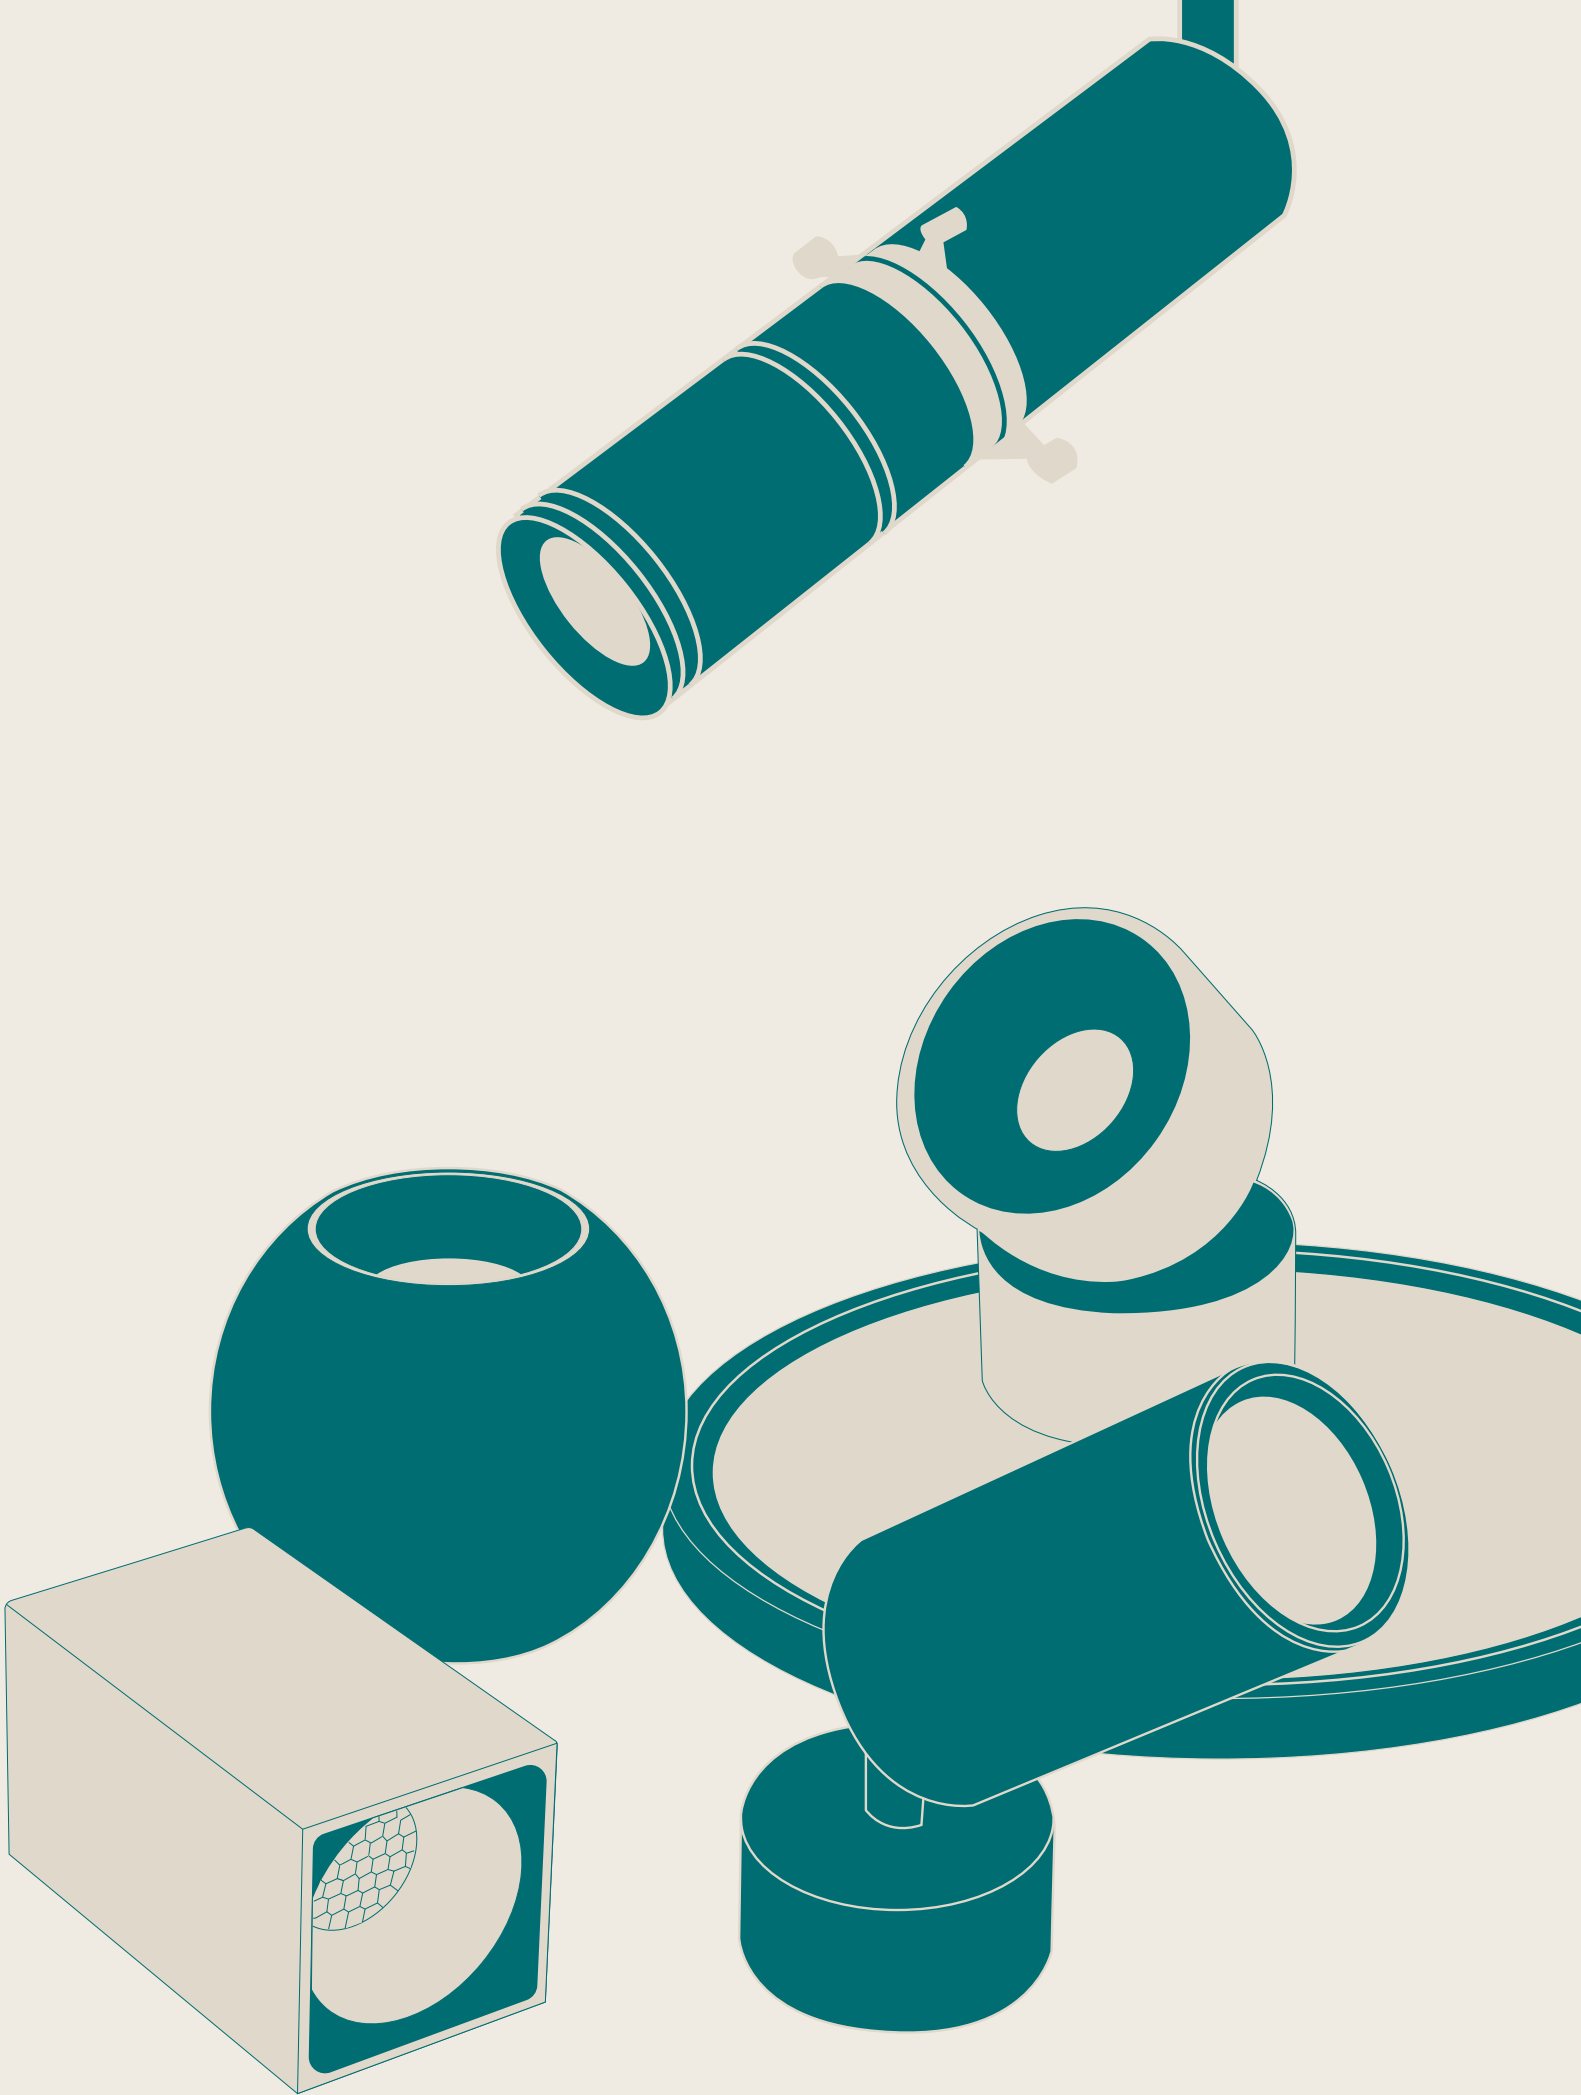



LED
CEILING


Our **ceiling light range** is designed to combine **elegant design** with **high-performance lighting technology**, offering a premium solution for both residential and commercial spaces. With features like **CRI>98** for exceptional color accuracy, **adjustable field beam angles** for flexible light distribution, and a variety of **optical options** to suit different applications, these fixtures deliver both functionality and visual comfort. Available in a **wide range of colors and finishes**, our ceiling lights can seamlessly complement any interior while providing **precise, high-quality illumination**.

Datum

PRO



Datum features a **CRI>97**, ensuring exceptional color accuracy and vibrant, true-to-life illumination. Available in **two shapes** and **two modern color finishes**, it blends effortlessly into a variety of interior styles. Equipped with a **honeycomb filter**, it also offers enhanced glare control, making it ideal for spaces that demand both **visual comfort** and **high-performance lighting**.

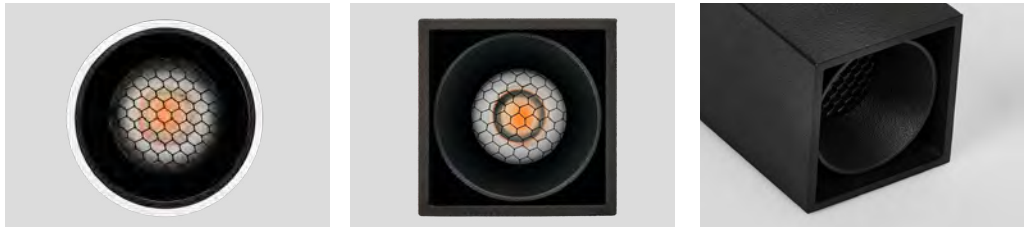

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9030699 ○	5W	3000K	189Lm	D 4 H 7	220-240Vac	On/Off Included
9030700 ●	5W	3000K	189Lm	D 4 H 7	220-240Vac	





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9030701 ○	5W	3000K	189Lm	L 4 W 4 H 7	220-240Vac	On/Off Included
9030702 ●	5W	3000K	189Lm	L 4 W 4 H 7	220-240Vac	



Largo

PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9844076 ○	6W	3000K	359Lm	L 4.9 W 4.9 H 6	220-240Vac	On/Off Included
9844077 ●	6W	3000K	359Lm	L 4.9 W 4.9 H 6	220-240Vac	
9844078 ●	6W	3000K	359Lm	L 4.9 W 4.9 H 6	220-240Vac	
9844079 ○	10W	3000K	712Lm	L 6.8 W 6.8 H 8	220-240Vac	
9844080 ●	10W	3000K	712Lm	L 6.8 W 6.8 H 8	220-240Vac	
9844081 ●	10W	3000K	712Lm	L 6.8 W 6.8 H 8	220-240Vac	



Largo is a refined ceiling light series available in **three different sizes** and **three elegant color options**, offering versatility to suit a wide range of spaces and design styles. With its **high-quality finishes** and attention to detail, Largo combines aesthetic appeal with reliable performance.

Jax

ESSENTIAL

- IP65



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9050703 ●	7W	3000K	560Lm	L 14.2 W 4 H 8	220-240Vac	On/Off Included
9050704 ○	7W	3000K	560Lm	L 14.2 W 4 H 8	220-240Vac	





Etho & Luisa are a stylish and cost-effective ceiling light series, available in **four distinct colors** and **different sizes** to suit a variety of applications. It features **exceptional finishing** that delivers a premium look and feel without compromising on budget—making it an ideal choice for projects that demand both **quality and affordability**.

Luisa

ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9060309	6W	3000K	422Lm	D 4 H 15	220-240Vac	On/Off Included
9060310	6W	3000K	422Lm	D 4 H 15	220-240Vac	
9060311	6W	3000K	422Lm	D 4 H 15	220-240Vac	
9060312	6W	3000K	422Lm	D 4 H 15	220-240Vac	
9060313	8W	3000K	571Lm	D 4 H 20	220-240Vac	
9060314	8W	3000K	571Lm	D 4 H 20	220-240Vac	
9060315	8W	3000K	571Lm	D 4 H 20	220-240Vac	
9060316	8W	3000K	571Lm	D 4 H 20	220-240Vac	



Etho



ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9695156	6W	3000K	452Lm	L 5 W 5 H 15	220-240Vac	On/Off Included
9695157	6W	3000K	452Lm	L 5 W 5 H 15	220-240Vac	
9695101	6W	3000K	452Lm	L 5 W 5 H 15	220-240Vac	
9695102	6W	3000K	452Lm	L 5 W 5 H 15	220-240Vac	
9695158	6W	3000K	452Lm	L 5 W 5 H 20	220-240Vac	
9695159	6W	3000K	452Lm	L 5 W 5 H 20	220-240Vac	
9695103	6W	3000K	452Lm	L 5 W 5 H 20	220-240Vac	
9695104	6W	3000K	452Lm	L 5 W 5 H 20	220-240Vac	
9695160	6W	3000K	452Lm	L 5 W 5 H 30	220-240Vac	
9695161	6W	3000K	452Lm	L 5 W 5 H 30	220-240Vac	
9695105	6W	3000K	452Lm	L 5 W 5 H 30	220-240Vac	
9695106	6W	3000K	452Lm	L 5 W 5 H 30	220-240Vac	



Doc
PRO



























Roller

PRO






























Sero

ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9248060	○ 7W	3000K	466Lm	D 5.5 H 7.5	220-240Vac	On/Off included
9248062	● 7W	3000K	432Lm	D 5.5 H 7.5	220-240Vac	
9248061	○ 13W	3000K	951Lm	D 7.5 H 9.5	220-240Vac	
9248063	● 13W	3000K	840Lm	D 7.5 H 9.5	220-240Vac	



Garf

ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9388901	● 7W	3000K	570Lm	D 7 H 7.5	220-240Vac	On/Off Included
9388902	○ 7W	3000K	570Lm	D 7 H 7.5	220-240Vac	



Iris

ESSENTIAL




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9060301	● 10W	3000K	700Lm	D 7 H 8	220-240Vac	On/Off Included
9060302	○ 10W	3000K	700Lm	D 7 H 8	220-240Vac	
9060303	● 10W	3000K	700Lm	D 7 H 8	220-240Vac	
9060304	● 10W	3000K	700Lm	D 7 H 8	220-240Vac	



Aneto

ESSENTIAL

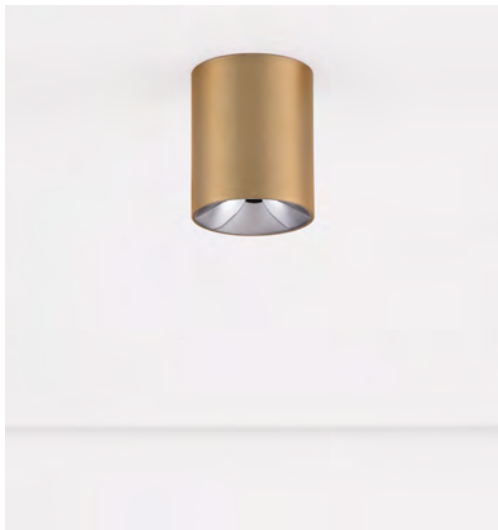

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9695150	○ 10W	3000K	600Lm	D 7.2 H 9.3	220-240Vac	On/Off Included
9695151	● 10W	3000K	600Lm	D 7.2 H 9.3	220-240Vac	
9695152	● 10W	3000K	600Lm	D 7.2 H 9.3	220-240Vac	
9695153	● 10W	3000K	600Lm	D 7.2 H 9.3	220-240Vac	



Ziaza

ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9030729	○ 10W	3000K	505Lm	D 10 H 8.6	220-240Vac	On/Off Included
9030730	● 10W	3000K	505Lm	D 10 H 8.6	220-240Vac	
9695166	● 10W	3000K	505Lm	D 10 H 8.6	220-240Vac	
9695167	● 10W	3000K	505Lm	D 10 H 8.6	220-240Vac	
9030731	○ 17W	3000K	833Lm	D 12 H 8.6	220-240Vac	
9030732	● 17W	3000K	833Lm	D 12 H 8.6	220-240Vac	
9695168	● 17W	3000K	833Lm	D 12 H 8.6	220-240Vac	
9695169	● 17W	3000K	833Lm	D 12 H 8.6	220-240Vac	



Anello

ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9030772	● 16W	3000K	1477Lm	D 11 H 9.5	220-240Vac	On/Off Included
9030773	○ 16W	3000K	1477Lm	D 11 H 9.5	220-240Vac	



Cannos

PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9844095	● 14W	3000K	1193Lm	D 12 H 9	220-240Vac	On/Off Included Dali 9621523
9844096	○ 14W	3000K	1193Lm	D 12 H 9	220-240Vac	
9844097	● 20W	3000K	1600Lm	D 14.4 H 10	220-240Vac	
9844098	○ 20W	3000K	1600Lm	D 14.4 H 10	220-240Vac	



Nano

ESSENTIAL




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9052028	○ 13W	3000K	1163Lm	D 8.5 H 7.3	220-240Vac	On/Off Included
9052029	● 13W	3000K	1163Lm	D 8.5 H 7.3	220-240Vac	
9052031	● 13W	3000K	1163Lm	D 8.5 H 7.3	220-240Vac	






Pablo

PRO



CODE	WATT	CCT	FLUX	DIMENSIONS	VOLTAGE	DIMMABLE
9810091	● 6W	3000K	116Lm	D 2.8 H 11.5	220-240Vac	On/Off included

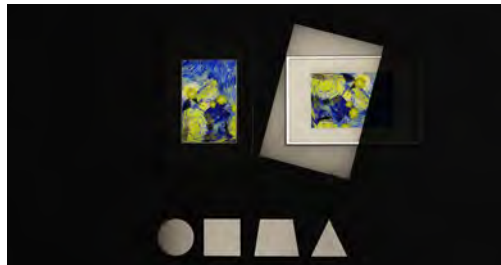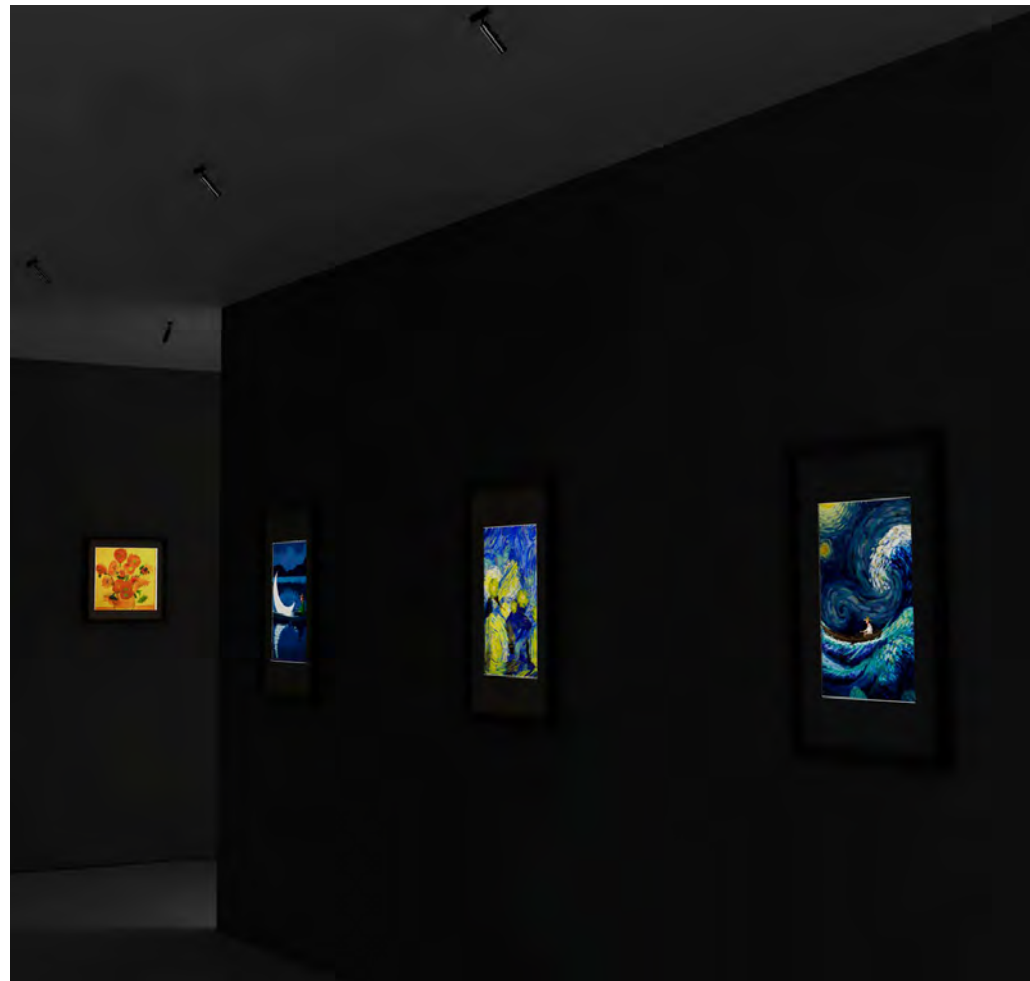


Pablo – a 6W architectural spotlight that embodies minimalist design and advanced lighting performance. Crafted for precision and versatility, Pablo offers focused illumination with a compact form factor.



Pablo features **specialized optics** designed to create a **unique vector-like light shape**, combining **clean beam edges** with precise control. These optics allow for **sharp, defined illumination** that enhances architectural lines and highlights specific surfaces without spill or glare. The interplay of **geometric light distribution** and smooth gradient transitions makes Pablo ideal for applications where both form and light become part of the visual design—perfect for galleries, retail displays, and high-end interiors seeking **impactful, sculpted lighting effects**. Experience the perfect balance of form and function with Pablo – where sophisticated design meets superior lighting technology.

Spectre

ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9551810	● 5W	3000K	330Lm	D 5.5 H 11	220-240Vac	On/Off included
9580636	● 5W	3000K	330Lm	D 5.5 H 11	220-240Vac	
9551820	● 10W	3000K	735Lm	D 6.5 H 12.8	220-240Vac	
9580637	● 10W	3000K	735Lm	D 6.5 H 12.8	220-240Vac	
9551830	● 15W	3000K	1074Lm	D 8.5 H 14.4	220-240Vac	
9580638	● 15W	3000K	1074Lm	D 8.5 H 14.4	220-240Vac	

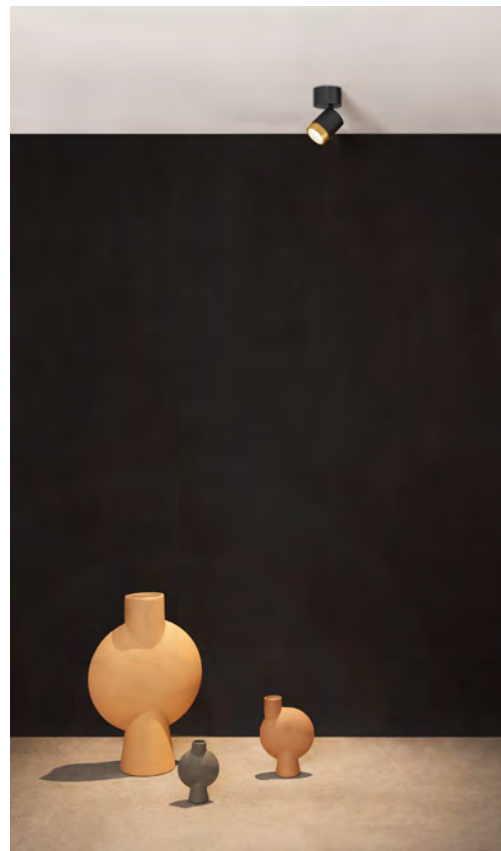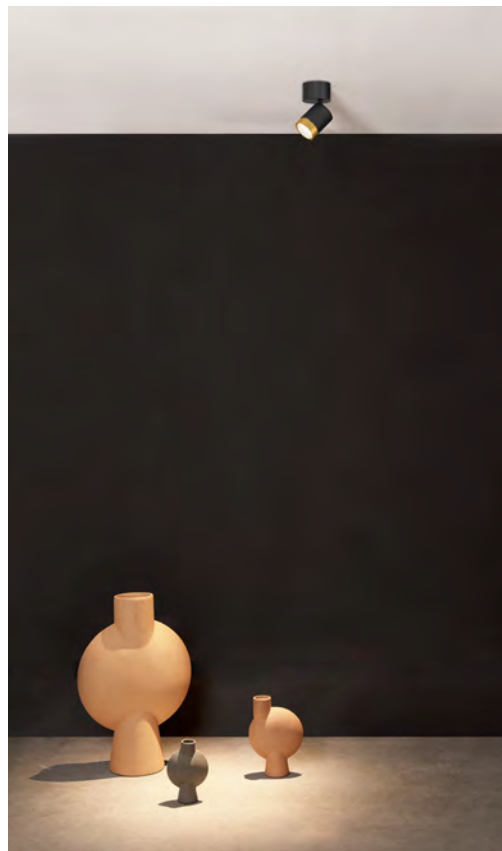

Spectre is a versatile ceiling light series featuring a **zoomable beam angle** and **adjustable field angle**, allowing precise control over light distribution. Available in **three different sizes** and **two modern color options**, Spectre combines **functional flexibility** with a sleek design—making it ideal for applications that require both performance and adaptability.

Colosio

PRO



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9040129	○	8W	3000K	700Lm	D 4.5 H 13	220-240Vac	On/Off included
9040128	●	8W	3000K	700Lm	D 4.5 H 13	220-240Vac	



Boston

PRO



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9441292	○	6W	3000K	450Lm	D 4 H 16	220-240Vac	On/Off included
9441291	●	6W	3000K	450Lm	D 4 H 16	220-240Vac	




Miniair

PRO



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9720101	○	10W	3000K	892Lm	D 6.2 H 17	220-240Vac	On/Off included
9720102	●	10W	3000K	892Lm	D 6.2 H 17	220-240Vac	

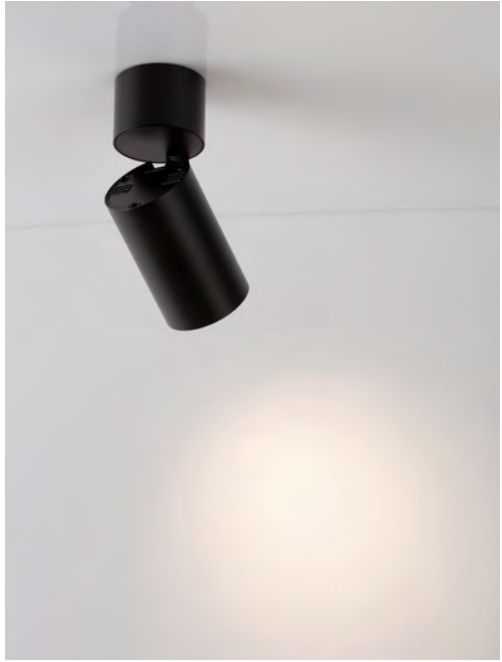

Akro

ESSENTIAL



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9030770	●	12W	3000K	780Lm	D 8 H 12	220-240Vac	On/Off Included
9030771	○	12W	3000K	780Lm	D 8 H 12	220-240Vac	



CEILING - LED

Universal

PRO





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
72004	● 13W	3000K	1151Lm	D 10 H 10.3	220-240Vac	On/Off Included
62004	○ 13W	3000K	1151Lm	D 10 H 10.3	220-240Vac	

CEILING - LED

Lot

ESSENTIAL





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9015110	○ 15W	3000K	1336Lm	D 10 H 7	220-240Vac	On/Off included
9015111	● 15W	3000K	1336Lm	D 10 H 7	220-240Vac	

Cotto

ESSENTIAL






CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
72002	● 13W	3000K	1151Lm	D 10 H 9	220-240Vac	On/Off Included
62002	○ 13W	3000K	1151Lm	D 10 H 9	220-240Vac	

Cotto

ESSENTIAL

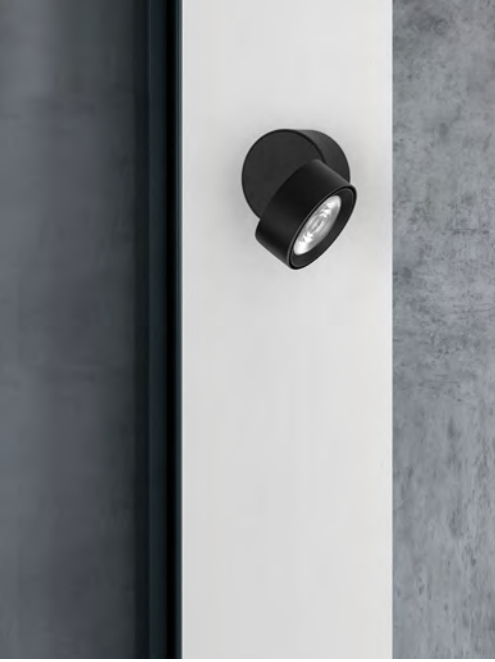




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
92001	◐ 20W	3000K	1826Lm	D 9.5 H 7	220-240Vac	On/Off included
92002	● 20W	3000K	1826Lm	D 9.5 H 7	220-240Vac	
92003	● 20W	3000K	1826Lm	D 9.5 H 7	220-240Vac	

Emira

ESSENTIAL




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9006030	15W	3000K	1396Lm	D 11.9 H 4.5	220-240Vac	Triac included
9006031	24W	3000K	1407Lm	D 25.5 H 4.5	220-240Vac	
9006032	36W	3000K	2077Lm	D 35.5 H 4.5	220-240Vac	



Perfect

ESSENTIAL

- TW with remote control



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9058200	20W	3000K	1200Lm	D 20 H 9.5	220-240Vac	On/Off
9058102	20W	2700K-6000K	979Lm	D 20 H 9.5	220-240Vac	TW
9058100	20W	3000K	1200Lm	D 20 H 9.5	220-240Vac	On/Off
9058101	20W	2700K-6000K	979Lm	D 20 H 9.5	220-240Vac	TW



INCLUDED

Remote Control
for Changing CCT & Dimming



9058127

Halo

PRO



Halo is a stylish and versatile lighting fixture, available in **three different sizes**, designed to bring a clean, architectural touch to any space. Its **indirect light output** creates a soft, ambient glow, enhancing visual comfort while minimizing glare. Thanks to its **magnetic modular design**, it allows for easy installation and seamless integration into a variety of interiors, making it an ideal choice for both residential and commercial applications.



CODE	WATT	CCT (INDIRECT)	FLUX	DIMENSIONS	VOLTAGE	COMPATIBLE ONLY WITH
9580040	60W	3000K	-	D 80 H 150	220-240Vac	9580010 (max 4)
9580050	60W	3000K	-	D 120 H 150	220-240Vac	9580020 (max 6)
9580060	60W	3000K	-	D 150 H 150	220-240Vac	9580030 (max 7)




CODE	WATT	CCT	FLUX	DIMENSIONS	VOLTAGE	COMPATIBLE ONLY WITH
9580010	6W	3000K	230Lm	L 17 W 2.5 H 3.2	24Vdc	9580040
9580020	6W	3000K	230Lm	L 19.2 W 2.5 H 3.2	24Vdc	9580050
9580030	6W	3000K	230Lm	L 20 W 2.5 H 3.2	24Vdc	9580060



Perfect

ESSENTIAL

- TW with remote control



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9058300	○ 24W	3000K	1440Lm	D 40 H 10	220-240Vac	Triac
9058103	○ 24W	2700K-6000K	1200Lm	D 40 H 10	220-240Vac	TW
9058400	● 24W	3000K	1440Lm	D 40 H 10	220-240Vac	Triac
9058104	● 24W	2700K-6000K	1200Lm	D 40 H 10	220-240Vac	TW
9058500	○ 40W	3000K	2400Lm	D 60 H 10	220-240Vac	Triac
9058105	○ 40W	2700K-6000K	2000Lm	D 60 H 10	220-240Vac	TW
9058600	● 40W	3000K	2400Lm	D 60 H 10	220-240Vac	Triac
9058106	● 40W	2700K-6000K	2000Lm	D 60 H 10	220-240Vac	TW
9058700	○ 80W	3000K	4800Lm	D 80 H 10	220-240Vac	Triac
9058107	○ 80W	2700K-6000K	4000Lm	D 80 H 10	220-240Vac	TW
9058800	● 80W	3000K	4800Lm	D 80 H 10	220-240Vac	Triac
9058108	● 80W	2700K-6000K	4000Lm	D 80 H 10	220-240Vac	TW
9058900	○ 120W	3000K	7200Lm	D 100 H 10	220-240Vac	Triac
9058109	○ 120W	2700K-6000K	6000Lm	D 100 H 10	220-240Vac	TW
9058910	● 120W	3000K	7200Lm	D 100 H 10	220-240Vac	Triac
9058110	● 120W	2700K-6000K	6000Lm	D 100 H 10	220-240Vac	TW



INCLUDED

Remote Control
for Changing CCT & Dimming



9058127

Perfect


ESSENTIAL

INCLUDED

Remote Control
for Changing CCT & Dimming



9058127



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9060100	○ 24W	3000K	1440Lm	D 40 H 120	220-240Vac	Triac
9058119	○ 24W	2700K-6000K	1200Lm	D 40 H 120	220-240Vac	TW
9060200	● 24W	3000K	1440Lm	D 40 H 120	220-240Vac	Triac
9058120	● 24W	2700K-6000K	1200Lm	D 40 H 120	220-240Vac	TW
9060300	○ 40W	3000K	2400Lm	D 60 H 120	220-240Vac	Triac
9058121	○ 40W	2700K-6000K	2000Lm	D 60 H 120	220-240Vac	TW
9060400	● 40W	3000K	2400Lm	D 60 H 120	220-240Vac	Triac
9058122	● 40W	2700K-6000K	2000Lm	D 60 H 120	220-240Vac	TW




The **Perfect Ceiling Light** offers a sleek and versatile solution for modern interiors, available in **various sizes** to suit different spaces. It comes in both a **Tunable White version with remote control** for adjustable ambiance and a standard **On/Off version** for simple functionality. Designed for comfort and style, it combines clean aesthetics with user-friendly operation— ideal for residential, hospitality, and commercial use.

Cerium

ESSENTIAL



Cerium is a **cost-effective** and highly adaptable lighting solution, available in **several sizes** to suit a range of applications. It features a **dip switch** for easy **CCT adjustment across five different settings**, offering flexibility in color temperature based on project needs. With **suspension accessories** available and a **Triac dimming version**, Cerium combines versatility, performance, and value—making it an ideal choice for both commercial and residential spaces.



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9060991 ○	18W	2700/3000/3500/4000/6500	1440Lm	D 21.5 H 1.95	220-240Vac	On/Off Included
9060992 ●	18W	2700/3000/3500/4000/6500	1440Lm	D 21.5 H 1.95	220-240Vac	
9060993 ○	24W	2700/3000/3500/4000/6500	2040Lm	D 29 H 1.95	220-240Vac	
9060994 ●	24W	2700/3000/3500/4000/6500	2040Lm	D 29 H 1.95	220-240Vac	



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9060995 ○	15W	2700/3000/3500/4000/6500	1350Lm	D 20.8 H 2.4	220-240Vac	On/Off Included
9060996 ●	15W	2700/3000/3500/4000/6500	1350Lm	D 20.8 H 2.4	220-240Vac	
9060997 ○	20W	2700/3000/3500/4000/6500	1800Lm	D 29.3 H 2.4	220-240Vac	Triac Included
9060998 ●	20W	2700/3000/3500/4000/6500	1800Lm	D 29.3 H 2.4	220-240Vac	
9060999 ○	30W	2700/3000/3500/4000/6500	2700Lm	D 39.7 H 2.4	220-240Vac	
9061000 ●	30W	2700/3000/3500/4000/6500	2700Lm	D 39.7 H 2.4	220-240Vac	



OPTIONAL ACCESSORIES - SUSPENSION

(9060997 & 90609978)



9061001 9061002

(9060999 & 9061000)



9061003 9061004



Cerium

ESSENTIAL



-



Binary

PRO

-



Mire

ESSENTIAL





GU10
CEILING

Our **GU10 ceiling** light range offers a wide variety of options to suit any interior style, available in **multiple colors, sizes, shapes, and designs**. From round and square to more architectural forms, these fixtures are crafted from **high-quality materials** combining durability with visual appeal. Whether surface-mounted, fixed or adjustable, this range delivers flexibility, performance, and aesthetic variety—making it ideal for both residential and commercial applications.



Mor

CODE
9011452 ● 9011453 ○

DIMENSIONS (cm)
D 4 H 10

WATT
Max 10W

VOLTAGE
220-240Vac







CEILING - GU10

Boston

CODE

9441181 ● 9441182 ○

DIMENSIONS (cm)

D 5.8 H 19.6

WATT

Max 10W

VOLTAGE

220-240Vac









CEILING - GU10

Esca

CODE

9030416 ○ 9030417 ●

DIMENSIONS (cm)

D 6 H 11.5

WATT

Max 10W

VOLTAGE

220-240Vac









Loyd

CODE

9030412 ○ 9030413 ●

DIMENSIONS (cm)

D 6 H 8

WATT

Max 10W

VOLTAGE

220-240Vac









Nessi

CODE

9011400 ○ 9011401 ●

DIMENSIONS (cm)

D 6 H 11.8

WATT

Max 10W

VOLTAGE

220-240Vac









Picto

CODE

9911527

DIMENSIONS (cm)

D 6 H 10

WATT

Max 10W

VOLTAGE

220-240Vac









Imax

CODE

9011498 ● 9011499 ○

DIMENSIONS (cm)

D 6 H 13.5

WATT

Max 10W

VOLTAGE

220-240Vac









Marupe

CODE

834863 ○ 834865 ●

DIMENSIONS (cm)

D 6 H 10

WATT

Max 10W

VOLTAGE

220-240Vac





OPTIONAL ACCESSORIES

White & Silver Ring

834868

Clack & Gold Ring

834867





Oslo

CODE

9184371 ○ 9184373 ●

DIMENSIONS (cm)

D 6 H 15

WATT

Max 10W

VOLTAGE

220-240Vac







OPTIONAL ACCESSORIES

Ring

9011524

Robin

CODE
9011520 ● 9011521 ○
9011522 ● 9011523 ●

DIMENSIONS (cm)
D 6.5 H 16.5

WATT
Max 10W

VOLTAGE
220-240Vac



Cotty

CODE
9011505 ○ 9011504 ●

DIMENSIONS (cm)
D 8 H 8.5

WATT
Max 10W

VOLTAGE
220-240Vac



Ned

CODE
9419470 ○ 9419471 ●

DIMENSIONS (cm)
D 7 H 10

WATT
Max 10W

VOLTAGE
220-240Vac



Gozzano

CODE
9420481 ○ 9420482 ●

DIMENSIONS (cm)
D 8 H 9

WATT
Max 10W

VOLTAGE
220-240Vac



Aval

CODE
9011519 ○ 9011518 ●

DIMENSIONS (cm)
D 7 H 11

WATT
Max 10W

VOLTAGE
220-240Vac



CODE
9174511 ○ 9174512 ●
820001 ○ 820002 ●

DIMENSIONS (cm)
D 8 H 9
D 9.6 H 12.5

WATT
Max 10W

VOLTAGE
220-240Vac



Goni

CODE
9011502 ● 9011503 ○

DIMENSIONS (cm)
D 8 H 8.4

WATT
Max 10W

VOLTAGE
220-240Vac



San

CODE
9011507 ○ 9011506 ●
9011508 ● 9011509 ●
9011511 ○ 9011510 ●
9011512 ● 9011513 ●

DIMENSIONS (cm)
D 8 H 11.5
D 9.5 H 12.5

WATT
Max 10W

VOLTAGE
220-240Vac







CEILING - GU10

Ulty

CODE

9030418 ○ 9030419 ● 9030426 ○ 9030427 ●

DIMENSIONS (cm)

D 8.5 H 11.5
D 9.6 H 12.5

WATT

Max 10W

VOLTAGE

220-240Vac







OPTIONAL ACCESSORIES

Ring



9012174 9012175

CEILING - GU10

Nido

CODE

9012171 ○ 9012172 ● 9012173 ●

DIMENSIONS (cm)

D 9.6 H 14

WATT

Max 10W

VOLTAGE

220-240Vac







OPTIONAL ACCESSORIES

Ring



9012183 9012184

CEILING - GU10

Rende

CODE

9175513 ○ 9175514 ● 998091 ○ 998092 ●

DIMENSIONS (cm)

L 8 W 8 H 9
L 16 W 8 H 9


WATT

Max 10W

VOLTAGE

220-240Vac



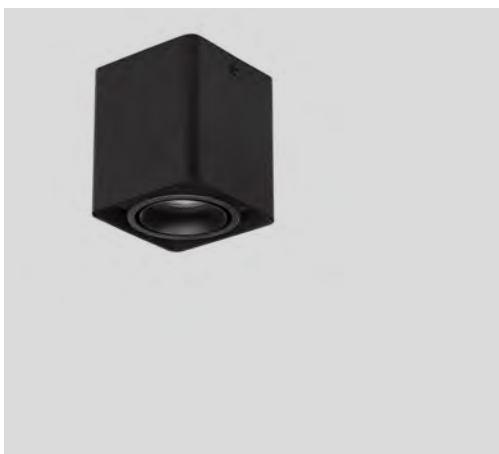



OPTIONAL ACCESSORIES

Ring



9011517

CEILING - GU10

Monique

CODE

9030421 ○ 9030420 ●

DIMENSIONS (cm)

L 8.5 W 8.5 H 10

WATT

Max 10W

VOLTAGE

220-240Vac







CEILING - GU10

Monique

CODE

9011353 ○ 9011352 ●

DIMENSIONS (cm)

L 8.5 W 8.5 H 11.5

WATT

Max 10W

VOLTAGE

220-240Vac







OPTIONAL ACCESSORIES

Ring



9012183 9012184

CEILING - GU10

Nido

CODE

9012181 ○ 9012182 ●

DIMENSIONS (cm)

L 9.5 W 9.5 H 14.5

WATT

Max 10W

VOLTAGE

220-240Vac







OPTIONAL ACCESSORIES

Ring



9011517

CEILING - GU10

Rende

CODE

9030428 ○ 9030429 ●

DIMENSIONS (cm)

L 9.6 W 9.6 H 12.5

WATT

Max 10W

VOLTAGE

220-240Vac







OPTIONAL ACCESSORIES

Ring



9011517

CEILING - GU10

Cubi

CODE

9011515 ○ 9011514 ● 9011516 ●

DIMENSIONS (cm)

D 9.6 H 14

WATT

Max 10W

VOLTAGE

220-240Vac



198 | TECHNICAL CATALOGUE

TECHNICAL CATALOGUE | 199

CEILING - GU10



Rende

CODE
820202 ○ 820203 ●
820602 ○ 820603 ●

DIMENSIONS (cm)
L 9.6 W 9.6 H 12.5
L 18 W 9.6 H 12.5

WATT
Max 10W

VOLTAGE
220-240Vac



Nami

CODE
9111506 ○ 9111505 ●
9111504 ●

DIMENSIONS (cm)
L 11 W 11 H 10

WATT
Max 10W

VOLTAGE
220-240Vac



Thomas

CODE
9113222 ○ 9113221 ●

DIMENSIONS (cm)
D 12 H 19

WATT
Max 10W

VOLTAGE
220-240Vac



CODE
9030431 ●

DIMENSIONS (cm)
D 13.6 H 17

WATT
Max 10W

VOLTAGE
220-240Vac



CEILING - GU10



Orazio

CODE
61853601

DIMENSIONS (cm)
D 7 H 11

WATT
Max 10W

VOLTAGE
220-240Vac




Pelia

CODE
9919107 ○ 9919108 ●
9919109 ●

DIMENSIONS (cm)
D 8 H 11

WATT
Max 10W

VOLTAGE
220-240Vac

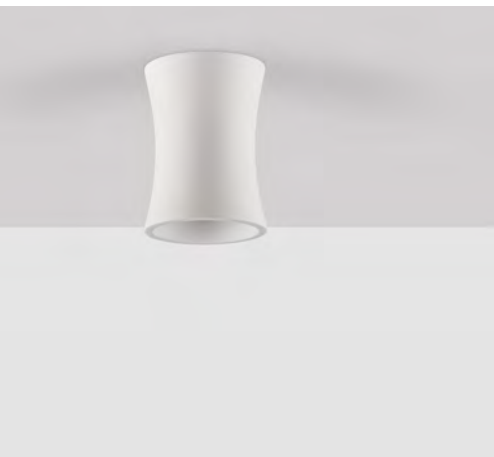

Aku

CODE
9919110 ○ 9919111 ●
9919112 ●

DIMENSIONS (cm)
D 9.5 H 11

WATT
Max 10W

VOLTAGE
220-240Vac




LOW VOLTAGE
TRACKS
202---- 301

Pages

Our **low voltage track** range includes a **diverse selection of products** designed to meet the needs of modern lighting applications. Available in **various sizes** and **several stylish color finishes**, this range offers flexible solutions for settings such as **residential, retail, hospitality, and commercial spaces**. With a focus on **compact design, precision lighting, and aesthetic appeal**, our low voltage track products deliver both **performance and versatility**, making them ideal for a wide variety of interior projects.

MINIMAL	Page 204-217
ULTRA SLIM	Page 218-229
PLANET	Page 230-241
5mm	Page 242-251
SHALLOW	Page 252-261
FLAT	Page 262-271
BREDA	Page 272-285
BUXTON	Page 286-301

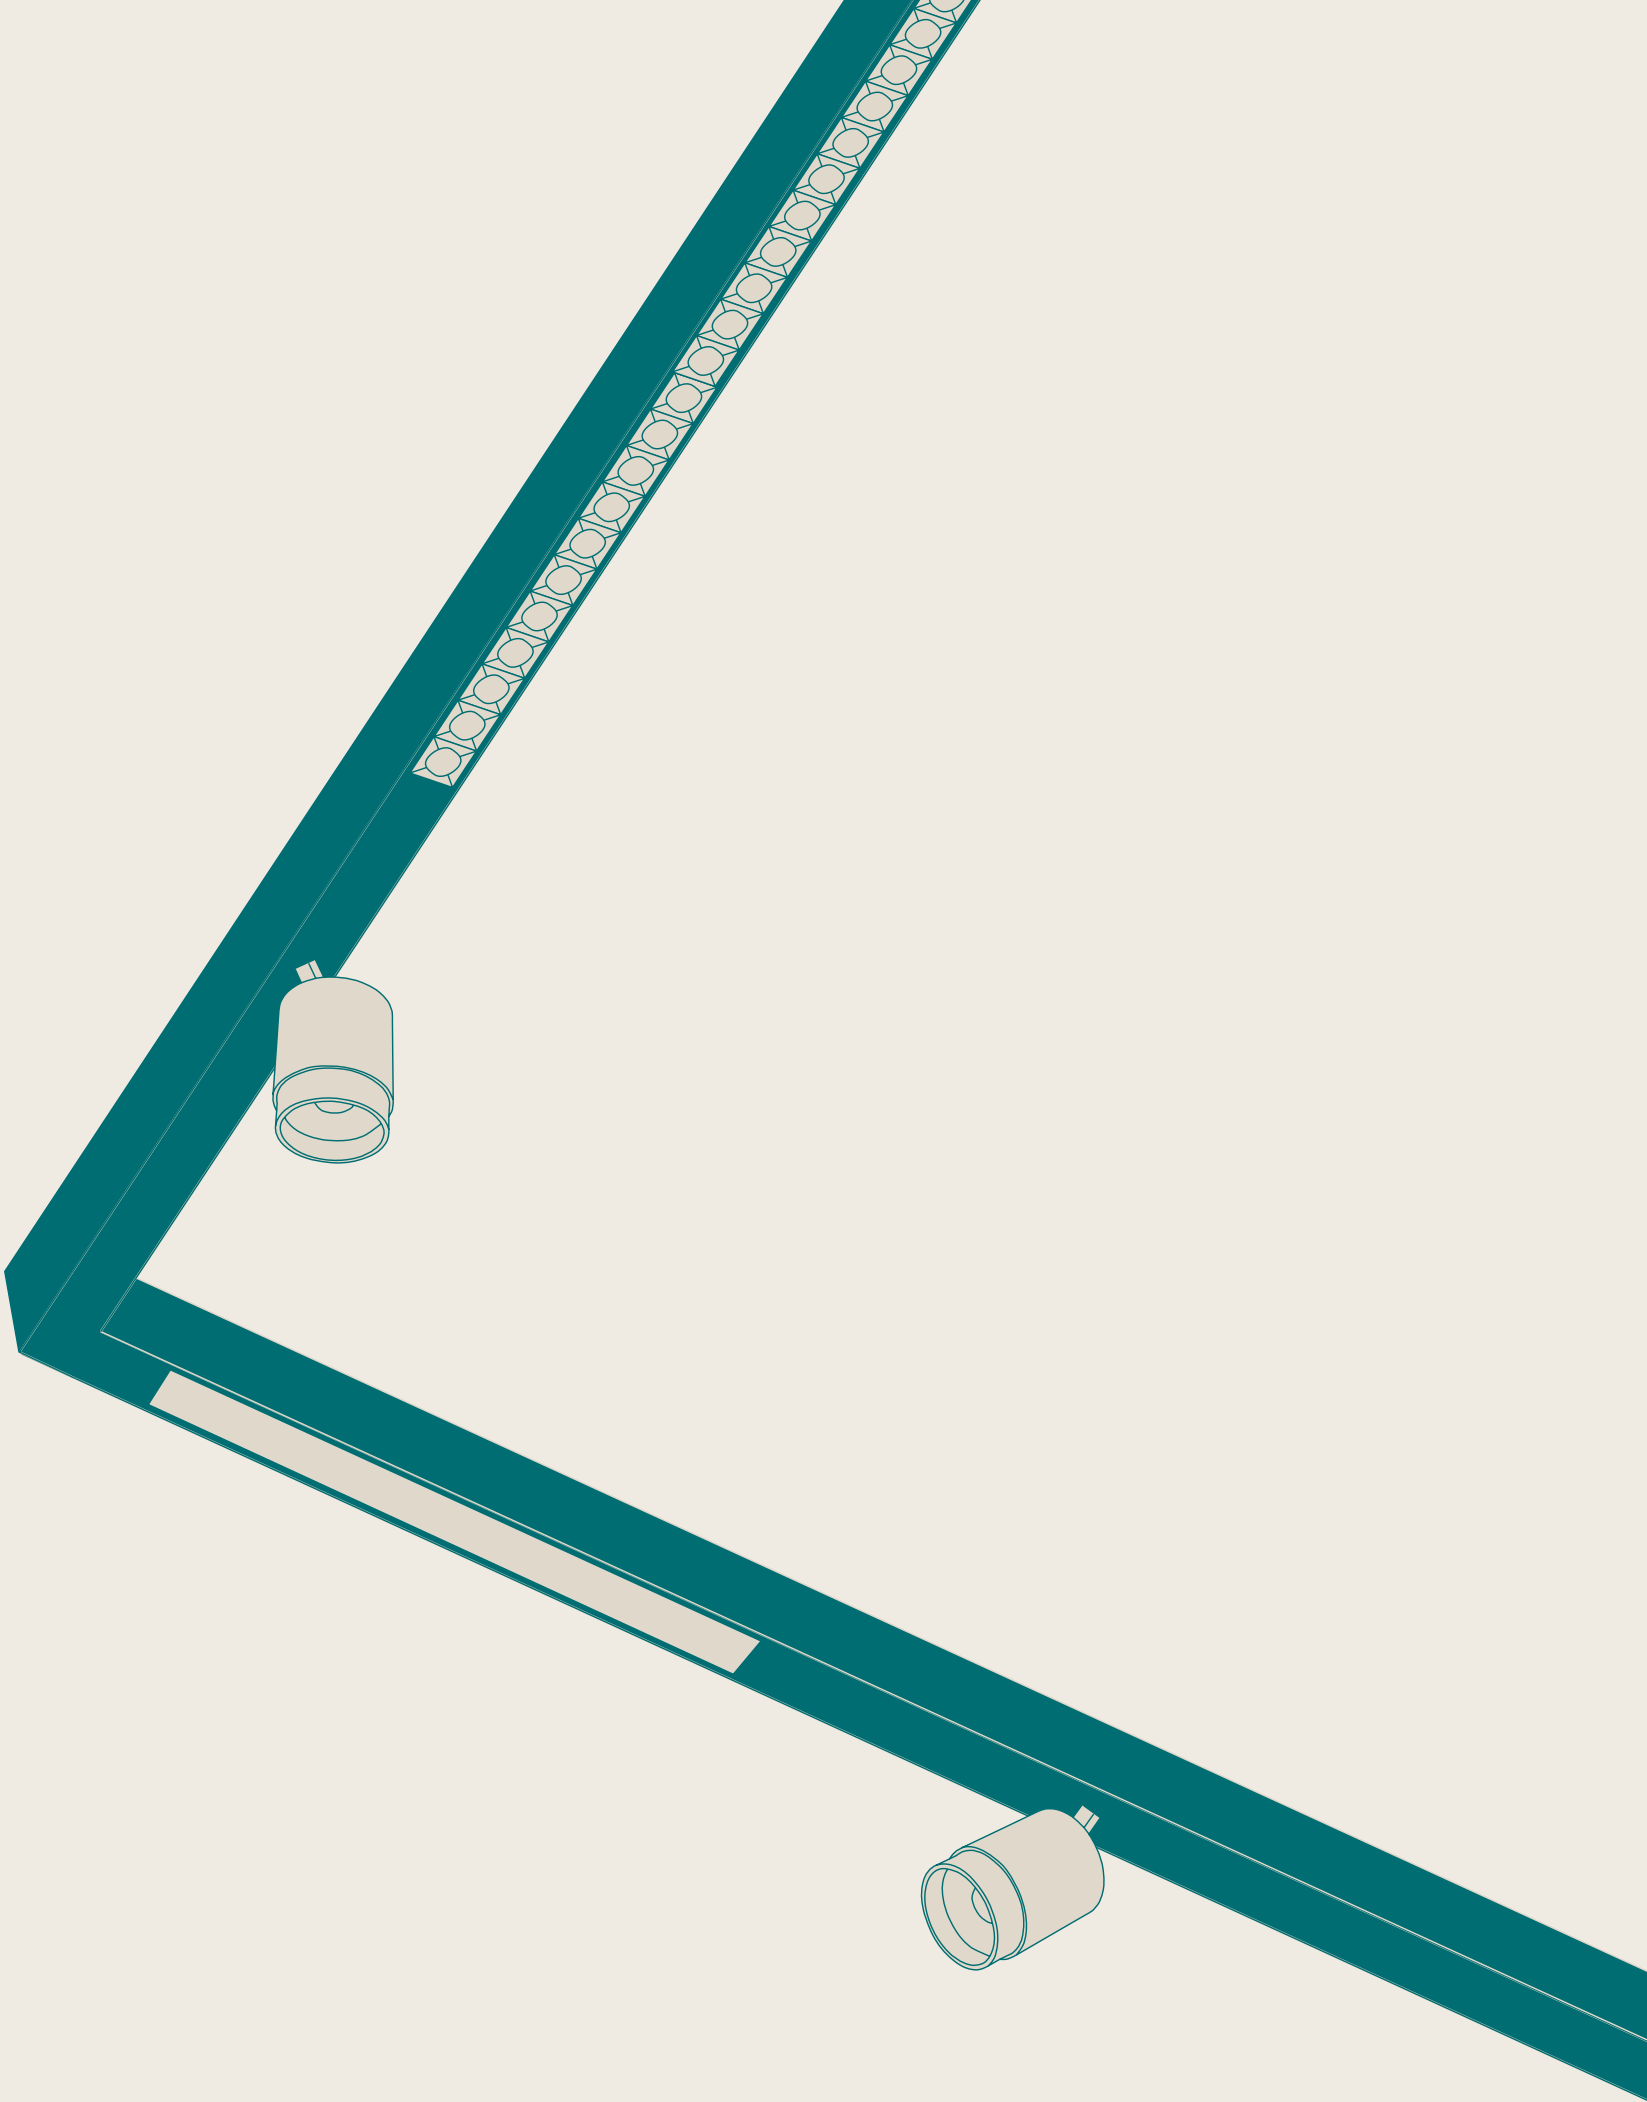




MINIMAL PRO
48V







Minimal Track is our **flagship 48V low voltage track**, designed for **minimalist aesthetics** and **high-performance lighting**. Available in **black and white finishes**, it supports **multiple DALI options** in both **2700K and 3000K** color temperatures. With a **Casambi-ready controller**, Minimal Track offers seamless integration into smart lighting systems, making it a top choice for projects that demand **sleek design, flexibility, and advanced control**.

Minimal

RECESS APPLICATION



TRACKS & ACCESSORIES


		CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9844103 ●	1m Track (Max 200W), Cut-Out: 2cm	
		9810022 ○		
		9844104 ●	2m Track (Max 200W), Cut-Out: 2cm	
		9810023 ○		
CURVE TRACKS		9844143 ●	Curved Track 60cm / 90°	
POWER FEED		9844106 ●	Dali Power Connector Wire 50cm	
		9810024 ○		
CONNECTORS		9844108 ●	Dali Electrical / Mechanical Connector used to connect rail by rail	
		9810025 ○		
		9844109 ●	Dali Horizontal 90° Electrical Connector	
		9810026 ○		
		9844111 ●	Horizontal 90° Mechanical Connector	
		9810028 ○		
		9844112 ●	T Electrical Connector	
		9810029 ○		
		9844114 ●	T Mechanical Connector	
		9810031 ○		
		9844115 ●	Dali Vertical 90° Electrical Connector	
		9810032 ○		
		9844117 ●	Vertical 90° Mechanical Connector	
		9810034 ○		
		9844118 ●	End Cap	
		9810035 ○		



Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP20	9621500	75 Watt, 220-240VAC, 48VDC 1.6A	L 9.9 W 9.7 H 3
	9621501	100 Watt, 220-240VAC, 48VDC 2.3A	L 12.9 W 9.7 H 3
	9621502	150 Watt, 220-240VAC, 48VDC 3.3A	L 15.9 W 9.7 H 3
	9621503	200 Watt, 220-240VAC, 48VDC 4.4A0	L 21.5 W 11.5 H 3
IP67	9621504	75 Watt, 100-240VAC, 48VDC 1A	L 14 W 6.3 H 3.2
	9621505	100 Watt, 100-240VAC, 48VDC 1.1A	L 14 W 6.3 H 3.2
	9621506	150 Watt, 100-240VAC, 48VDC 2A	L 18 W 6.3 H 3.55
	9621507	200 Watt, 100-240VAC, 48VDC 2.4A	L 19.9 W 6.3 H 3.55
Suggested Casambi Controller			
	CODE	DESCRIPTION	DIMENSIONS (CM)
	9810048	Casambi Ready Controller 8 addresses	L 15 W 2.8 H 2

Minimal

SURFACE MOUNTED ACCESSORIES USAGE




TRACKS & ACCESSORIES

		CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9844099 ●	1m Track (Max 200W)	
		9810020 ○		
		9844100 ●	2m Track (Max 200W)	
		9810021 ○		
CURVE TRACKS		9844139 ●	Curved Track R:160cm / 180°	
		9844140 ●	Curved Track 160cm / 90°	
		9844141 ●	Curved Track 40cm / 90°	
		9810049 ○	Curved Track 40cm / 90°	
		9844142 ●	Vertical Curved Track 60cm / 90°	
POWER FEED		9844105 ●	Dali Power Connector	
		9810024 ○		
CONNECTORS		9844108 ●	Dali Electrical / Mechanical Connector	
		9810025 ○		
		9844109 ●	Dali Horizontal 90° Electrical Connector	
		9810026 ○		
		9844110 ●	Horizontal 90° Mechanical Connector for 9844109 / 9810026	
		9810027 ○		
		9844112 ●	T Electrical Connector	
		9810029 ○		
		9844113 ●	T Mechanical for 9844112 / 9810029	
		9810030 ○		
		9844115 ●	Dali Vertical 90° Electrical Connector	
		9810032 ○		
		9844116 ●	Vertical 90° Mechanical for track	
		9810033 ○		
		9844118 ●	End Caps	
		9810035 ○		






Drivers			
CODE		DESCRIPTION	DIMENSIONS (cm)
9844137 ●		100W On/Off Driver with box (for dali connect 9844107)	L 47.8 W 3.6 H 2.2
9810046 ○			L 47.8 W 3.6 H 2.2
9844138 ●		200W On/Off Driver with box (for dali connect 9844107)	L 47.8 W 3.6 H 2.2
9810047 ○			L 47.8 W 3.6 H 2.2

Minimal

SUSPENDED ACCESSORIES USAGE

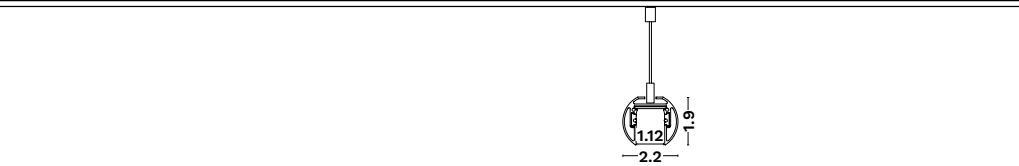


TRACKS & ACCESSORIES

		CODE	DESCRIPTION	DIMENSIONS (cm)
TRACKS		9844101	● 1m Track (Max 200W)	
		9844102	● 2m Track (Max 200W)	
POWER FEED		9844107	● Dali Linear Power feed Black Wire 210cm	
CONNECTOR		9844108	● Electrical / Mechanical Connector	
		9844119	● Rounded End Caps	
OTHER ACCESSORIES		9844120	● Suspension Kit 2m wire	
		9844121	● Driver Box & Suspension 2m wire (Driver excluded)	
		9844150	200W Driver, 48Vdc, 4.2A, 220-240Vac	

Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP67	9621504	75 Watt, 100-240VAC, 48VDC 1A	L 18 W 6.3 H 3.55
	9621505	100 Watt, 100-240VAC, 48VDC 1.1A	L 18 W 6.3 H 3.55


Suggested Casambi Controller		
CODE	DESCRIPTION	DIMENSIONS (cm)
9810048	Casambi Ready Controller 8 adresses	L 15 W 2.8 H 2

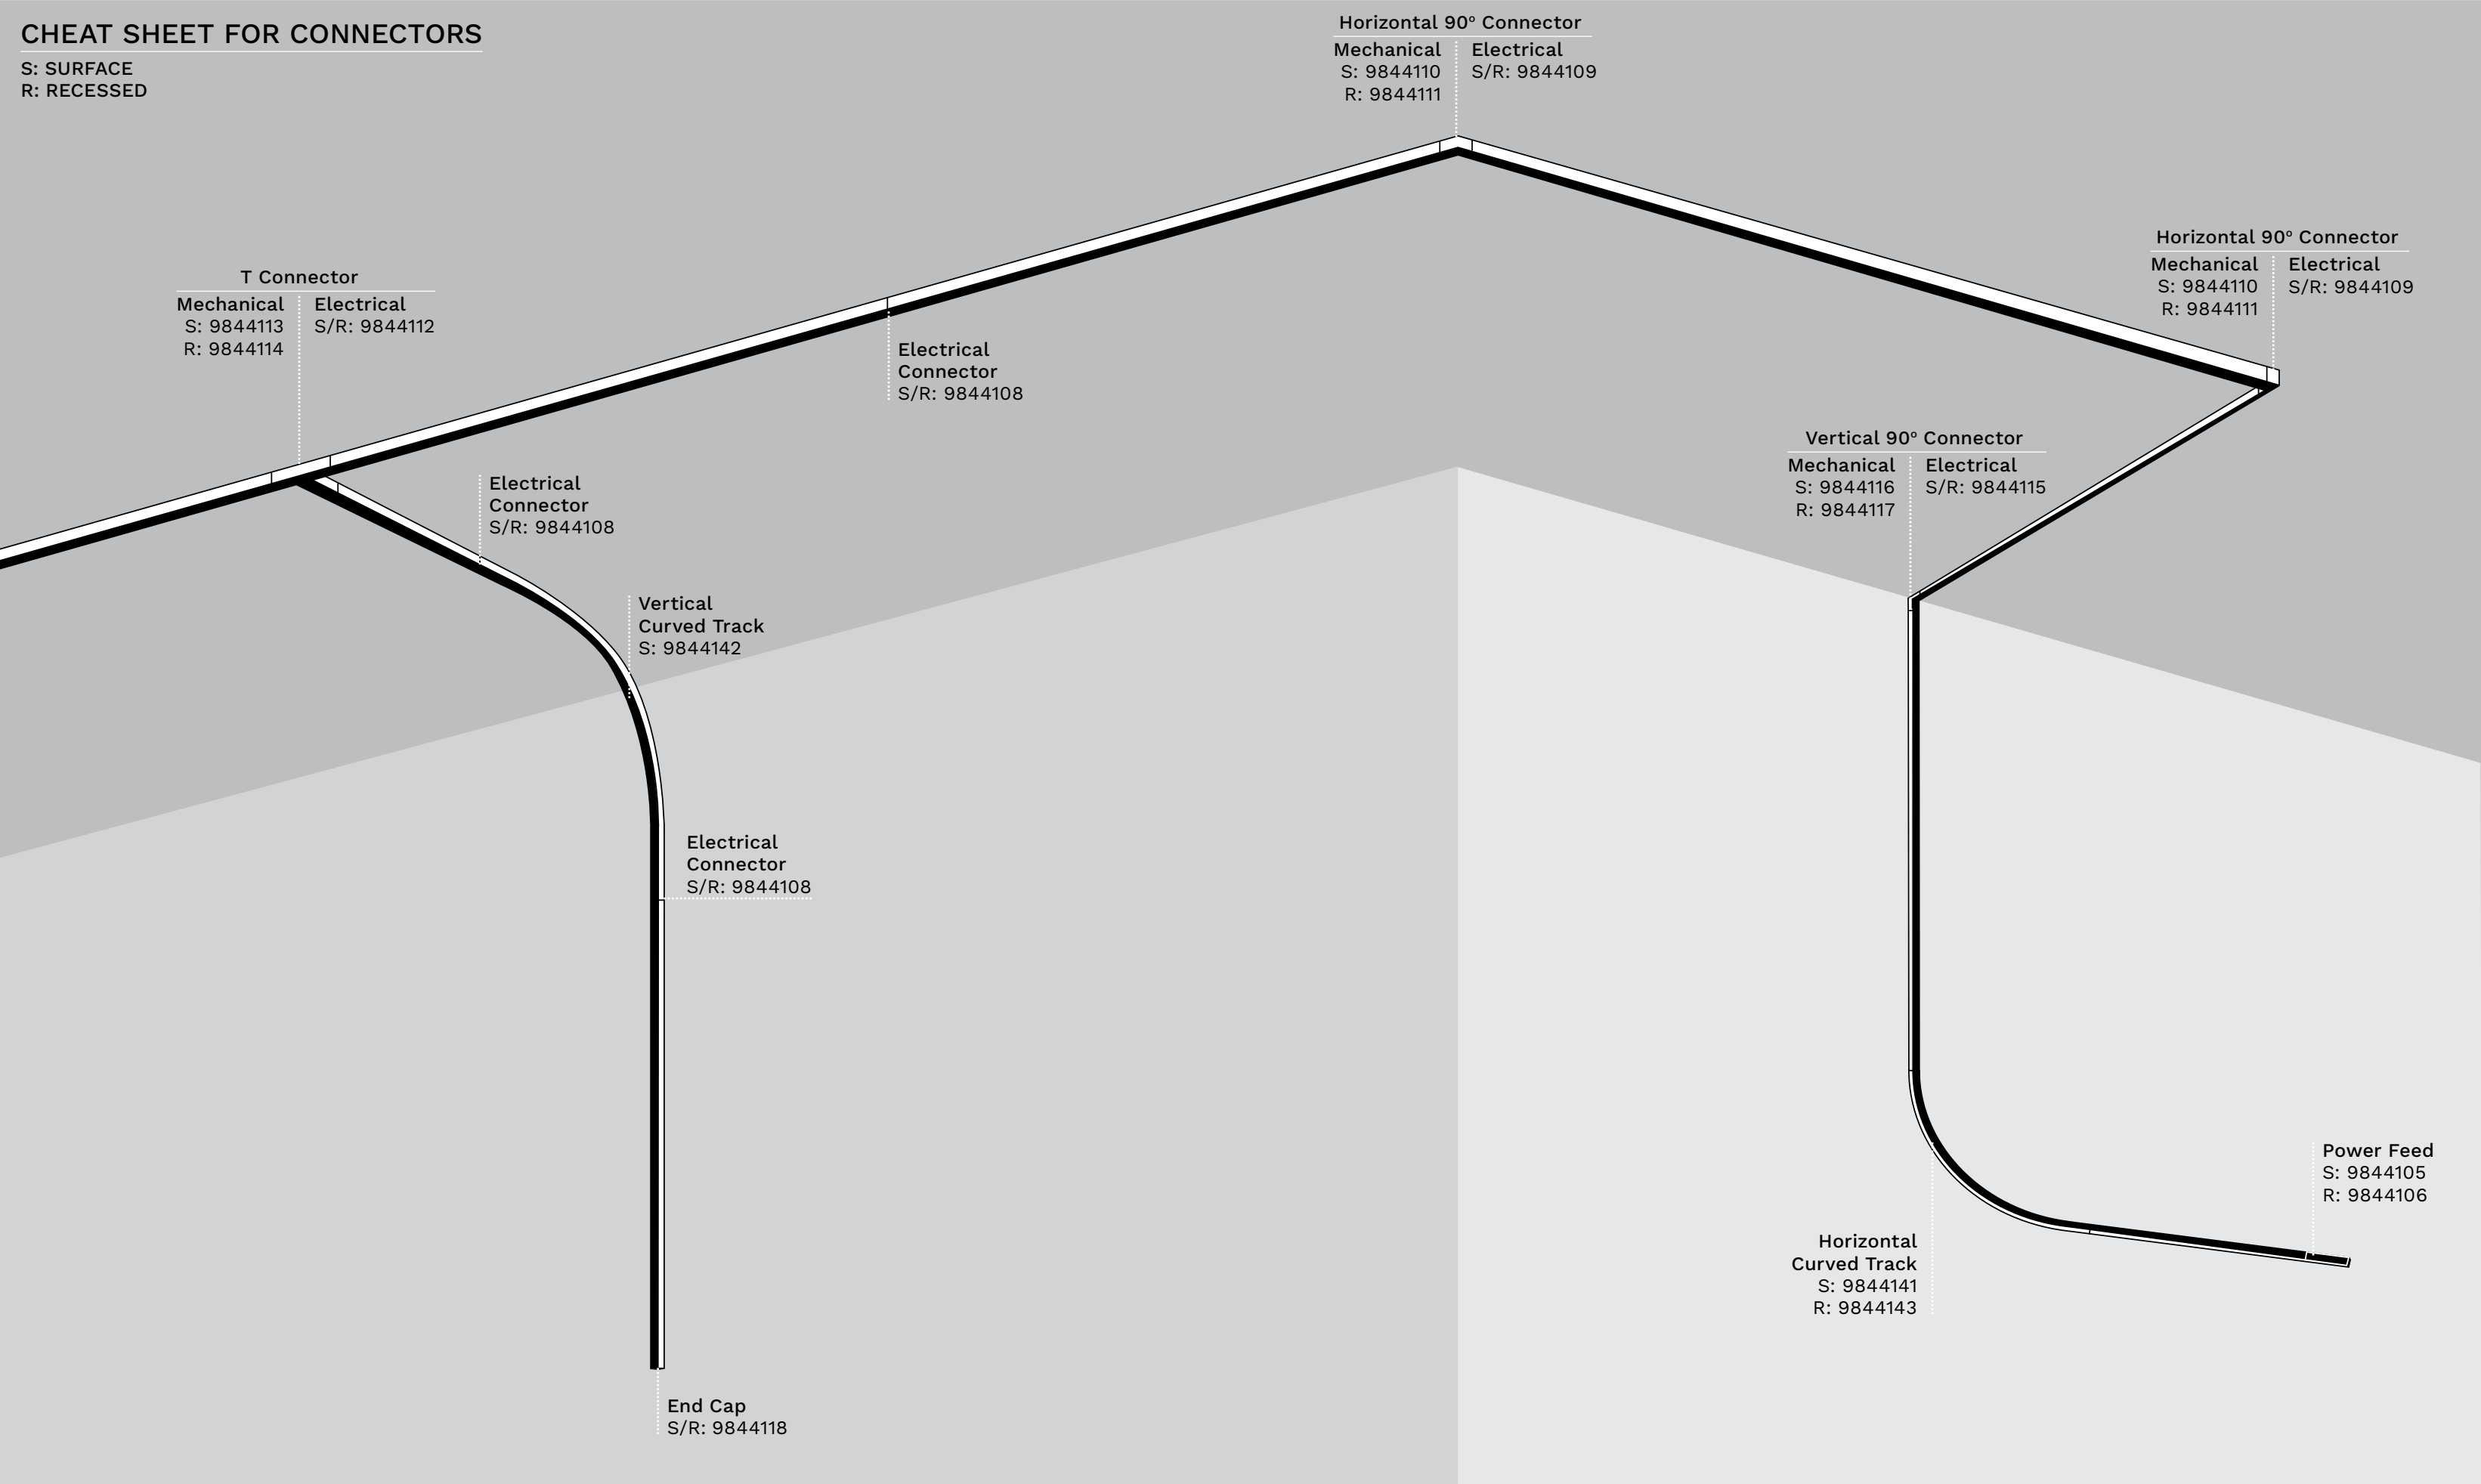



Lighting Modules

The **lighting modules** designed for our **ultra-slim 48V** track combine **sleek, minimalist design** with **high-quality performance**. Engineered to complement the track's low-profile aesthetic, the range includes **linear fixtures, adjustable linear spotlights, and suspended luminaires** all crafted for precision and visual comfort. These modules provide **versatile lighting solutions** while maintaining a **refined, modern look**, making them ideal for sophisticated residential, retail, and commercial interiors where **form and function** go hand in hand.

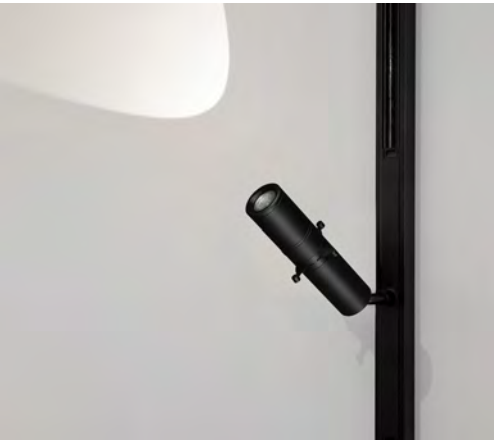

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9810082 ●	6W	2700K	468Lm	L 28.8 W 1.1 H 0.7	48Vdc	On/Off
9810087 ●	6W	2700K	468Lm	L 28.8 W 1.1 H 0.7	48Vdc	Dali
9810083 ●	6W	3000K	468Lm	L 28.8 W 1.1 H 0.7	48Vdc	On/Off
9810086 ●	6W	3000K	468Lm	L 28.8 W 1.1 H 0.7	48Vdc	Dali
9810084 ○	6W	2700K	468Lm	L 28.8 W 1.1 H 0.7	48Vdc	On/Off
9810089 ○	6W	2700K	468Lm	L 28.8 W 1.1 H 0.7	48Vdc	Dali
9810085 ○	6W	3000K	468Lm	L 28.8 W 1.1 H 0.7	48Vdc	On/Off
9810088 ○	6W	3000K	468Lm	L 28.8 W 1.1 H 0.7	48Vdc	Dali




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9810072 ●	10W	2700K	790Lm	L 20 H 5.15	48Vdc	On/Off
9844131 ●	10W	3000K	790Lm	L 20 H 5.15	48Vdc	On/Off
9810071 ○	10W	2700K	790Lm	L 20 H 5.15	48Vdc	On/Off
9810042 ○	10W	3000K	790Lm	L 20 H 5.15	48Vdc	On/Off




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9810077 ●	15W	2700K	1064Lm	D 4.5 H 13	48Vdc	On/Off
9810052 ●	15W	3000K	1064Lm	D 4.5 H 13	48Vdc	On/Off
9810078 ○	15W	2700K	1064Lm	D 4.5 H 13	48Vdc	On/Off
9810053 ○	15W	3000K	1064Lm	D 4.5 H 13	48Vdc	On/Off
9810054 ●	20W	3000K	1400Lm	D 5.5 H 15	48Vdc	On/Off
9810055 ○	20W	3000K	1400Lm	D 5.5 H 15	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9810090 ●	6W	3000K	116Lm	D 2.8 H 11.5	48Vdc	On/Off



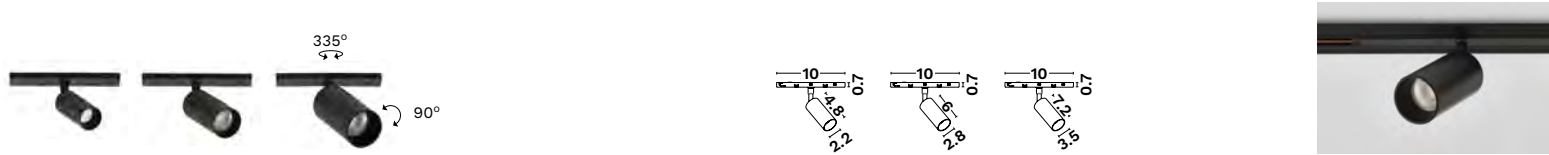

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9844124	● 3W	3000K	162Lm	D 2.2 H 4.8	48Vdc	On/Off
9844125	● 5W	3000K	488Lm	D 2.8 H 6	48Vdc	On/Off
9810065	● 7W	2700K	572Lm	D 3.5 H 7.2	48Vdc	Dali
9844126	● 7W	3000K	572Lm	D 3.5 H 7.2	48Vdc	On/Off
9844127	● 7W	3000K	572Lm	D 3.5 H 7.2	48Vdc	Dali
9810064	○ 7W	2700K	572Lm	D 3.5 H 7.2	48Vdc	Dali
9810038	○ 7W	3000K	572Lm	D 3.5 H 7.2	48Vdc	Dali



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9810067	● 5W	2700K	483Lm	D 3 H 5	48Vdc	On/Off
9844128	● 5W	3000K	483Lm	D 3 H 5	48Vdc	On/Off
9844129	● 5W	3000K	483Lm	D 3 H 5	48Vdc	Dali
9810066	○ 5W	2700K	483Lm	D 3 H 5	48Vdc	On/Off
9810068	○ 5W	2700K	483Lm	D 3 H 5	48Vdc	Dali
9810039	○ 5W	3000K	483Lm	D 3 H 5	48Vdc	On/Off
9810040	○ 5W	3000K	483Lm	D 3 H 5	48Vdc	Dali



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9810070	● 6W	2700K	456Lm	D 5 H 5	48Vdc	On/Off
9844130	● 6W	3000K	456Lm	D 5 H 5	48Vdc	On/Off
9810069	○ 6W	2700K	456Lm	D 5 H 5	48Vdc	On/Off
9810041	○ 6W	3000K	456Lm	D 5 H 5	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9810061	● 6W	2700K	722Lm	L 30 W 1.1 H 0.7	48Vdc	On/Off
9844122	● 6W	3000K	722Lm	L 30 W 1.1 H 0.7	48Vdc	On/Off
9810060	○ 6W	2700K	722Lm	L 30 W 1.1 H 0.7	48Vdc	On/Off
9810036	○ 6W	3000K	722Lm	L 30 W 1.1 H 0.7	48Vdc	On/Off
9810063	● 12W	2700K	1346Lm	L 60 W 1.1 H 0.7	48Vdc	On/Off
9844123	● 12W	3000K	1346Lm	L 60 W 1.1 H 0.7	48Vdc	On/Off
9810062	○ 12W	2700K	1346Lm	L 60 W 1.1 H 0.7	48Vdc	On/Off
9810037	○ 12W	3000K	1346Lm	L 60 W 1.1 H 0.7	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9810081	● 12W	2700K	716Lm	L 100 W 1.22 H 1	48Vdc	On/Off
9810058	● 12W	3000K	716Lm	L 100 W 1.22 H 1	48Vdc	On/Off
9810059	● 24W	3000K	1432Lm	L 200 W 1.22 H 1	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9810050	● 6W	3000K	440Lm	D 2.4 H 40	48Vdc	On/Off
9810051	○ 6W	3000K	440Lm	D 2.4 H 40	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9810080	● 5W	2700K	380Lm	D 10 H 129.8	48Vdc	On/Off
9810057	● 5W	3000K	380Lm	D 10 H 129.8	48Vdc	On/Off





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9810079 ●	5W	2700K	380Lm	D 10 H 10.5	48Vdc	On/Off
9810056 ●	5W	3000K	380Lm	D 10 H 10.5	48Vdc	On/Off

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9040130 ●	10W	3000K	900Lm	D 8.7 H 8.4	48Vdc	On/Off

· ONLY FOR SURFACE TRACK (9844099, 9810020, 9844100, 9810021) ·

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9810073 ●	6W	2700K	511Lm	D 4.2 H 4.7	48Vdc	On/Off
9844132 ●	6W	3000K	511Lm	D 4.2 H 4.7	48Vdc	On/Off
9810074 ●	7W	2700K	706Lm	D 5.2 H 6.2	48Vdc	On/Off
9844133 ●	7W	3000K	706Lm	D 5.2 H 6.2	48Vdc	On/Off
9844134 ●	7W	3000K	706Lm	D 5.2 H 6.2	48Vdc	Dali
9810043 ○	7W	3000K	706Lm	D 5.2 H 6.2	48Vdc	On/Off
9810044 ○	7W	3000K	706Lm	D 5.2 H 6.2	48Vdc	Dali

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9810076 ●	7W	2700K	397Lm	L 4.8 W 4.8 H 4	48Vdc	On/Off
9844135 ●	7W	3000K	397Lm	L 4.8 W 4.8 H 4	48Vdc	On/Off
9810075 ○	7W	2700K	397Lm	L 4.8 W 4.8 H 4	48Vdc	On/Off
9810045 ○	7W	3000K	397Lm	L 4.8 W 4.8 H 4	48Vdc	On/Off





ULTRA SLIM PRO
48V





Ultra Slim 48V magnetic track system features a 12mm opening and is designed for both **performance and flexibility** in modern lighting applications. It comes in **two recessed versions**—one for installation **above** and one **below the plasterboard**—as well as a **surface-mounted version** for added versatility. The system supports a wide range of **DALI-compatible modules**, including **linear lights, spotlights,** and **suspended luminaires**, offering complete freedom to create tailored lighting designs for **residential, commercial, or hospitality spaces**.



Ultra Slim




RECESSED APPLICATION with gap

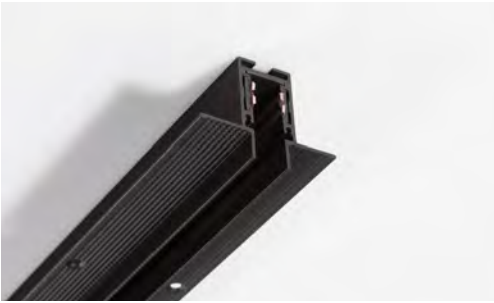

TRACKS & ACCESSORIES

		CODE		DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9550010	●	1m Track (Max 300W), Cut-Out: 2.35cm	
		9550012	●	2m Track (Max 300W), Cut-Out: 2.35cm	
CONNECTORS		9550040	●	Vertical 90° Electrical / Mechanical Connector	
		9550030	●	Horizontal 90° Electrical / Mechanical Connector	
		9550080	●	End Caps	



				On/Off	
		CODE		DESCRIPTION	DIMENSIONS (cm)
POWER CONNECTOR / FEED		9560020	●	Power Connector	
		9560010	●	Electrical / Mechanical Connector	

				Dali	
		CODE		DESCRIPTION	DIMENSIONS (cm)
CONNECTOR		9560035	●	Dali Power Connector	
POWER FEED		9560011	●	Dali Electrical / Mechanical Connector	
		9560012	●	Dali Electrical Connector 10cm for 9550040 & 9550030	





Optional Accessories					
	9010130	○		Dali Bus 100-240V, Iout 220mA	



Ultra Slim




RECESSED APPLICATION without gap

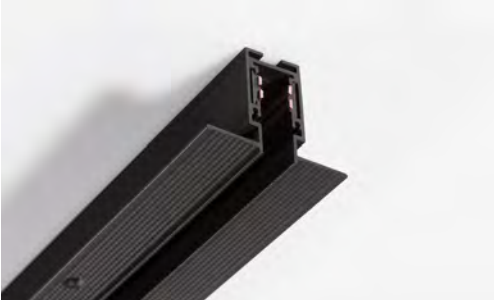

TRACKS & ACCESSORIES

		CODE		DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9550011	●	1m Track (Max 300W), Cut-Out: 2.35cm	
		9550013	●	2m Track (Max 300W), Cut-Out: 2.35cm	
CONNECTORS		9560220	●	Vertical 90° Electrical / Mechanical Connector	
		9560210	●	Horizontal 90° Electrical / Mechanical Connector	
		9550080	●	End Caps	

				On/Off	
		CODE		DESCRIPTION	DIMENSIONS (cm)
POWER CONNECTOR / FEED		9560020	●	Power Connector	
		9560010	●	Electrical / Mechanical Connector	

				Dali	
		CODE		DESCRIPTION	DIMENSIONS (cm)
CONNECTOR		9560035	●	Dali Power Connector	
POWER FEED		9560011	●	Dali Electrical / Mechanical Connector	
		9560012	●	Dali Electrical Connector 10cm for 9560220 & 9560210	











Optional Accessories					
	9010130	○		Dali Bus 100-240V, Iout 220mA	

Ultra Slim

SURFACE - PENDANT APPLICATION



TRACKS & ACCESSORIES


		CODE		DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9550020	●	1m Track (Max 300Watt)	
		9550014	●	2m Track (Max 300Watt)	
CONNECTORS		9550070	●	Vertical 90° Electrical / Mechanical Connector	
		9550060	●	Horizontal 90° Electrical / Mechanical Connector	
		9550090	●	End Cap	
		9560040	●	Connector Tube	
		9560030	●	Connector Tube with Power Connector	
On/Off					
		CODE		DESCRIPTION	DIMENSIONS (cm)
POWER CONNECTOR FEED		9560020	●	Power Connector	
		9560010	●	Electrical / Mechanical Connector	
Dali					
		CODE		DESCRIPTION	DIMENSIONS (cm)
CONNECTOR POWER FEED		9560035	●	Dali Power Connector	
		9560011	●	Dali Electrical / Mechanical Connector	
		9560012	●	Dali Electrical Connector 10cm for 9550070 & 9550060	
Optional Accessories					
		9010130	○	Dali Bus 100-240V, Iout 220mA	



Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP20	9621500	75 Watt, 220-240VAC, 48VDC 1.6A	L 9.9 W 9.7 H 3
	9621501	100 Watt, 220-240VAC, 48VDC 2.3A	L 12.9 W 9.7 H 3
	9621502	150 Watt, 220-240VAC, 48VDC 3.3A	L 15.9 W 9.7 H 3
	9621503	200 Watt, 220-240VAC, 48VDC 4.4A0	L 21.5 W 11.5 H 3
IP67	9621504	75 Watt, 100-240VAC, 48VDC 1A	L 14 W 6.3 H 3.2
	9621505	100 Watt, 100-240VAC, 48VDC 1.1A	L 14 W 6.3 H 3.2
	9621506	150 Watt, 100-240VAC, 48VDC 2A	L 18 W 6.3 H 3.55
	9621507	200 Watt, 100-240VAC, 48VDC 2.4A	L 19.9 W 6.3 H 3.55

CHEAT SHEET FOR CONNECTORS

S: SURFACE
G: RECESSED WITH GAP
NG: RECESSED NO GAP




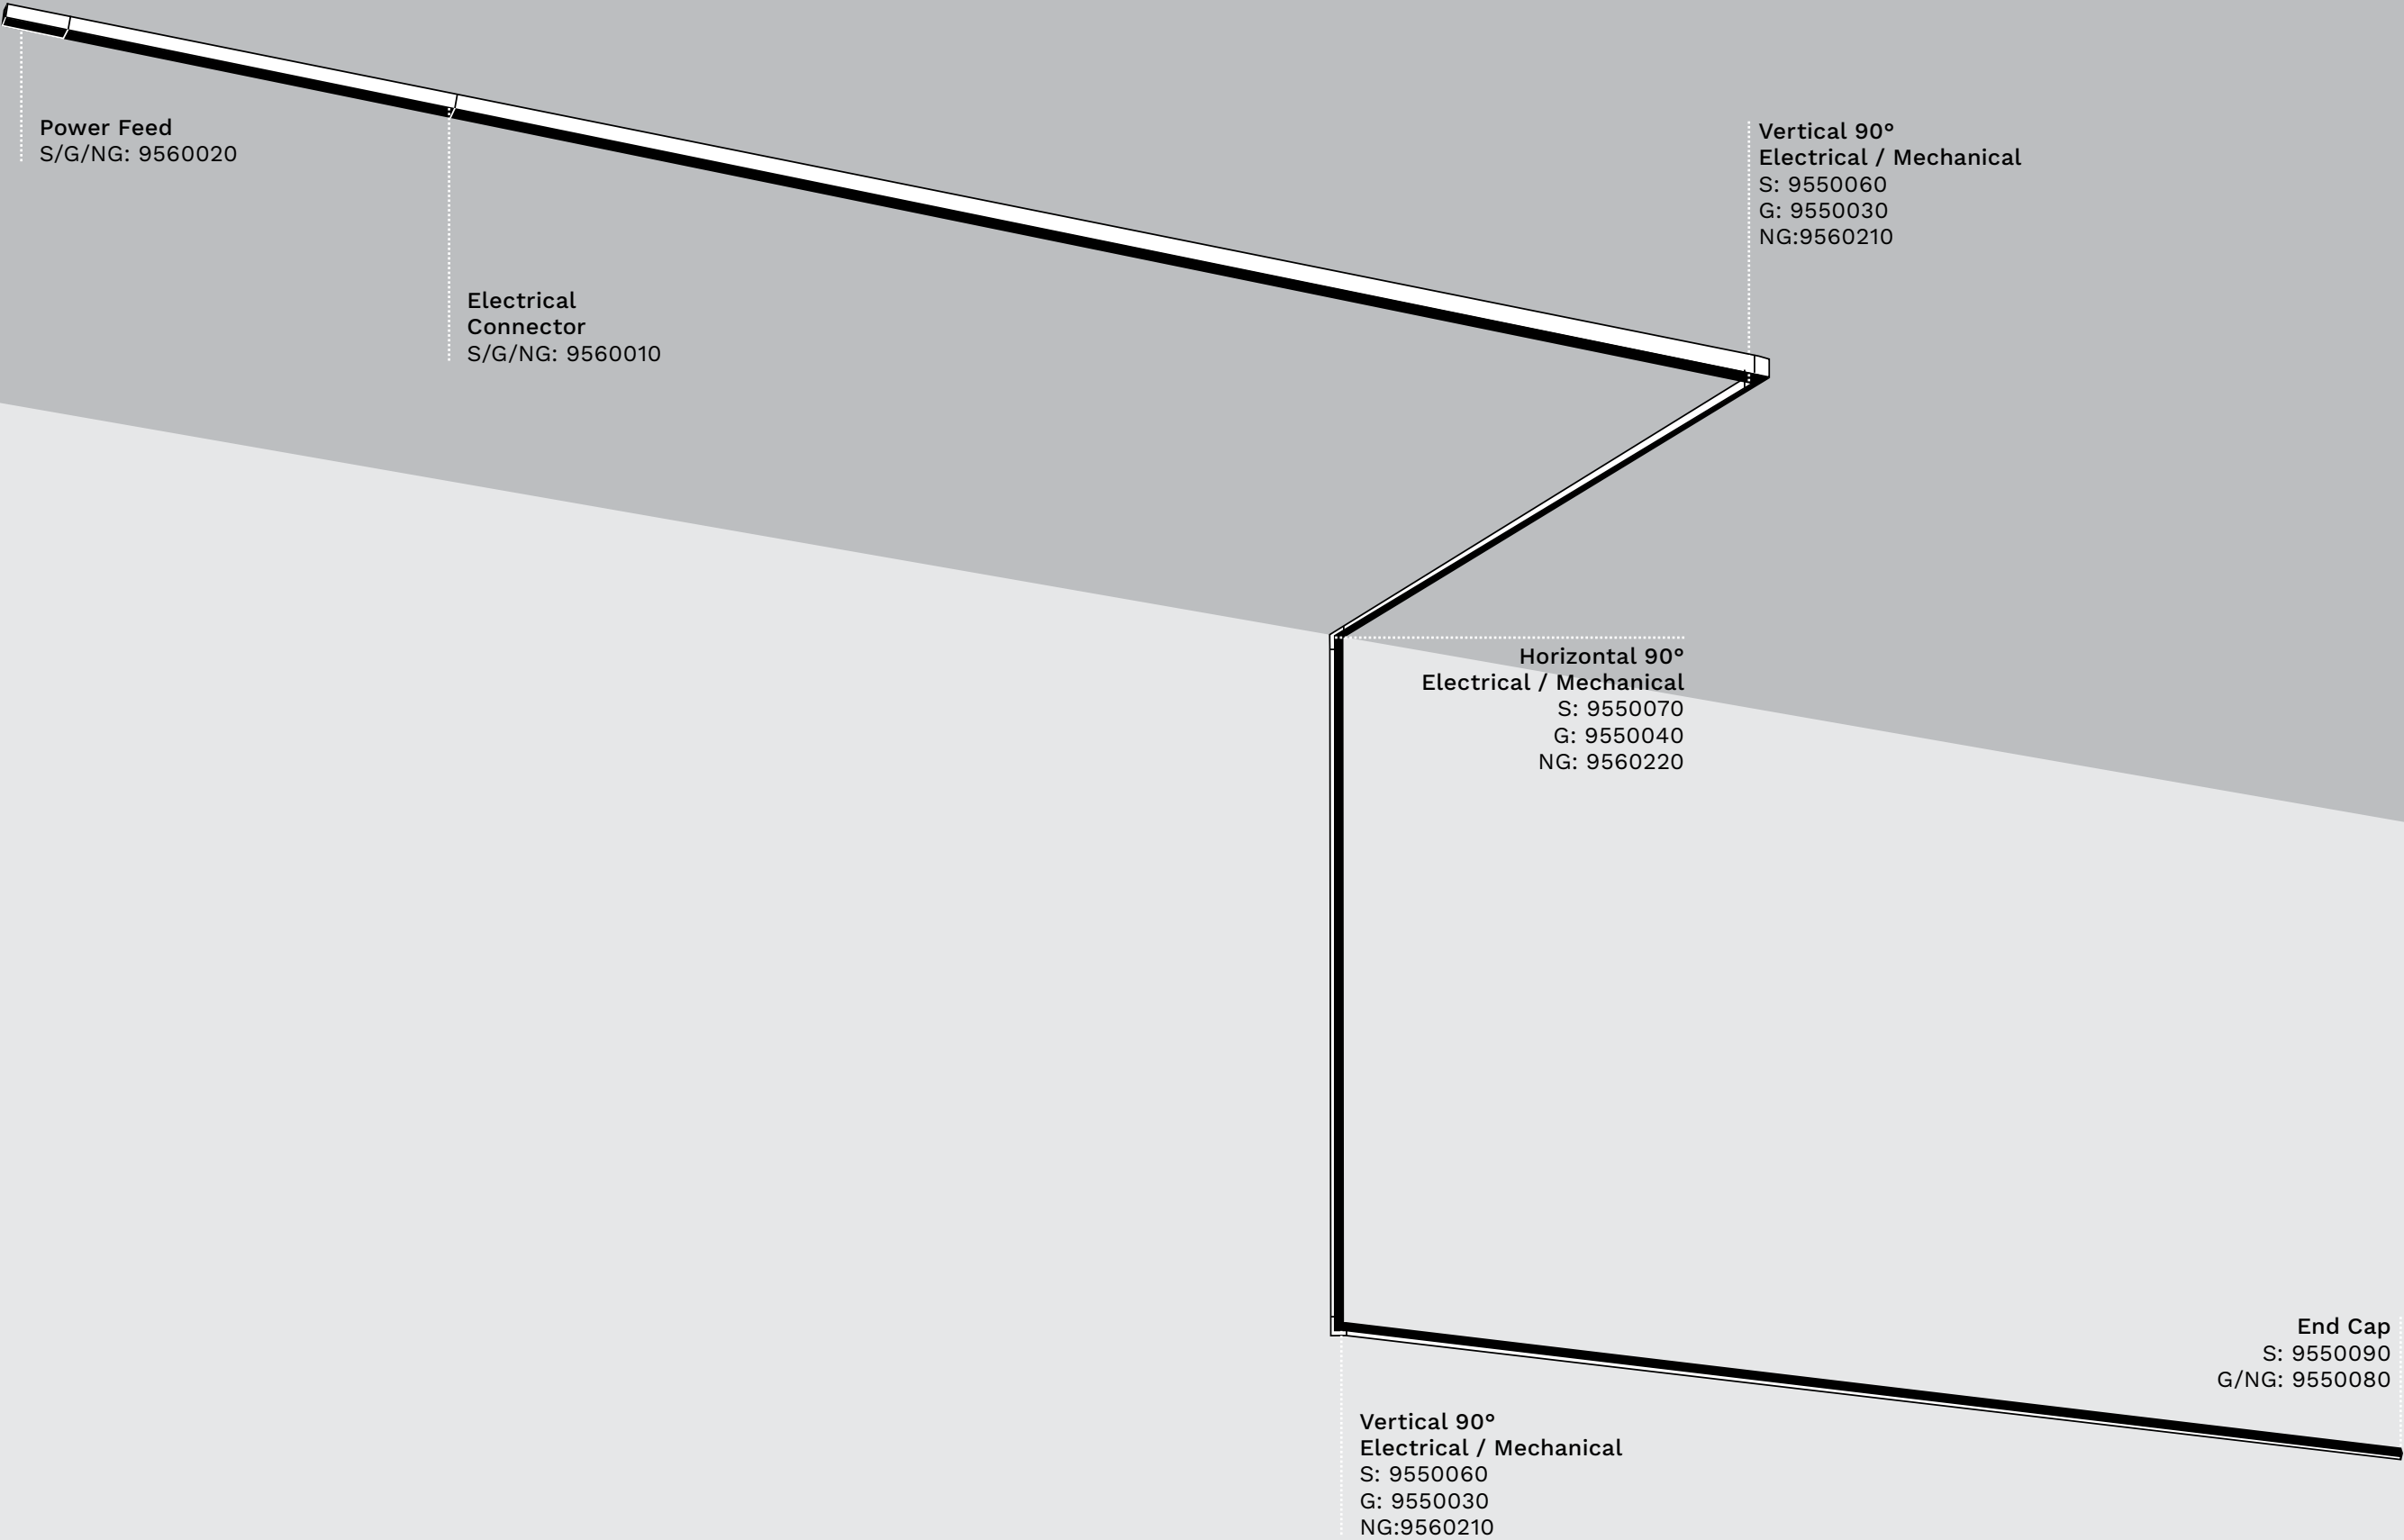


Lighting Modules




The **lighting modules** designed for our **ultra-slim 48V track** combine **sleek, minimalist design** with **high-quality performance**. Engineered to complement the track's low-profile aesthetic, the range includes **linear fixtures, adjustable linear spotlights**, and **suspended luminaires** —all crafted for precision and visual comfort. These modules provide **versatile lighting solutions** while maintaining a **refined, modern look**, making them ideal for sophisticated residential, retail, and commercial interiors where **form and function** go hand in hand.



						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010166	● 6W	3000K	176Lm	L 18 W 1.1 H 3.4	48Vdc	On/Off
9010300	● 6W	3000K	176Lm	L 18 W 1.1 H 3.4	48Vdc	Dali
9010307	● 6W	4000K	176Lm	L 18 W 1.1 H 3.4	48Vdc	On/Off
    		   				
						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010112	● 12W	3000K	340Lm	L 19.5 W 1.1 H 3.4	48Vdc	On/Off
9010301	● 12W	3000K	340Lm	L 19.5 W 1.1 H 3.4	48Vdc	Dali
9010308	● 12W	4000K	340Lm	L 19.5 W 1.1 H 3.4	48Vdc	On/Off
    		   				
						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010120	● 12W	3000K	336Lm	L 19.5 W 1.1 H 8.1	48Vdc	On/Off
9010302	● 12W	3000K	336Lm	L 19.5 W 1.1 H 8.1	48Vdc	Dali
9010309	● 12W	4000K	336Lm	L 19.5 W 1.1 H 8.1	48Vdc	On/Off
    		   				
						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9011130	● 15W	3000K	331Lm	L 30 W 1.1 H 3.4	48Vdc	On/Off
9010303	● 15W	3000K	331Lm	L 30 W 1.1 H 3.4	48Vdc	Dali
9010310	● 15W	4000K	331Lm	L 30 W 1.1 H 3.4	48Vdc	On/Off
9011140	● 30W	3000K	555Lm	L 60 W 1.1 H 3.4	48Vdc	On/Off
9010304	● 30W	3000K	555Lm	L 60 W 1.1 H 3.4	48Vdc	Dali
9010311	● 30W	4000K	555Lm	L 60 W 1.1 H 3.4	48Vdc	On/Off
    		  				



						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010105	● 5W	3000K	320Lm	D 4.5 H 5	48Vdc	On/Off
9010106	● 10W	3000K	700Lm	D 5.5 H 5.5	48Vdc	On/Off




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9080010	● 5W	3000K	363Lm	L 4.5 W 18 H 2.5	48Vdc	On/Off
9010305	● 5W	3000K	363Lm	L 4.5 W 18 H 2.5	48Vdc	Dali
9010312	● 5W	4000K	363Lm	L 4.5 W 18 H 2.5	48Vdc	On/Off
9010103	● 5W	3000K	363Lm	L 4.5 W 18 H 2.5	48Vdc	On/Off
9010314	● 5W	4000K	363Lm	L 4.5 W 18 H 2.5	48Vdc	On/Off
9080020	● 10W	3000K	730Lm	L 5.5 W 18 H 2.5	48Vdc	On/Off
9010306	● 10W	3000K	730Lm	L 5.5 W 18 H 2.5	48Vdc	Dali
9010313	● 10W	4000K	730Lm	L 5.5 W 18 H 2.5	48Vdc	On/Off
9010104	● 10W	3000K	730Lm	L 5.5 W 18 H 2.5	48Vdc	On/Off
9010320	● 10W	3000K	730Lm	L 5.5 W 18 H 2.5	48Vdc	Dali
9010315	● 10W	4000K	730Lm	L 5.5 W 18 H 2.5	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136202	● 5W	3000K	499Lm	D 5 H 100	48Vdc	On/Off




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136204	● 5W	3000K	139Lm	D 1.5 H 150	48Vdc	On/Off

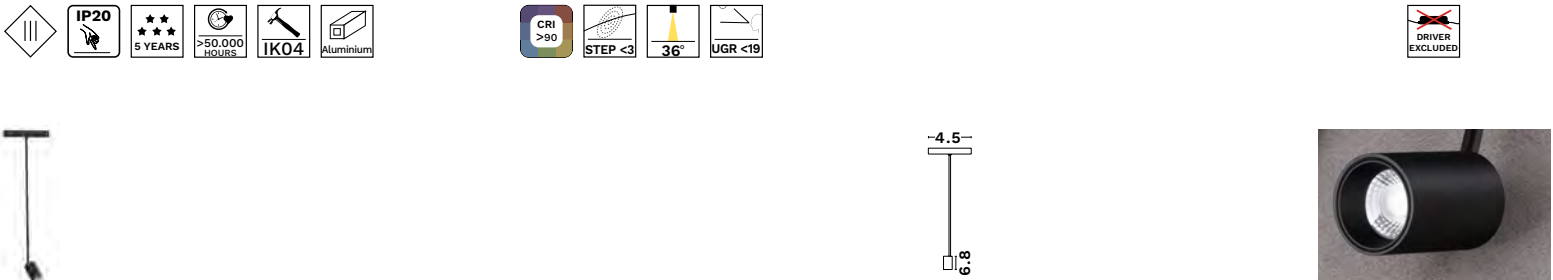

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136203	● 5W	3000K	444Lm	D 4.5 H 60	48Vdc	On/Off



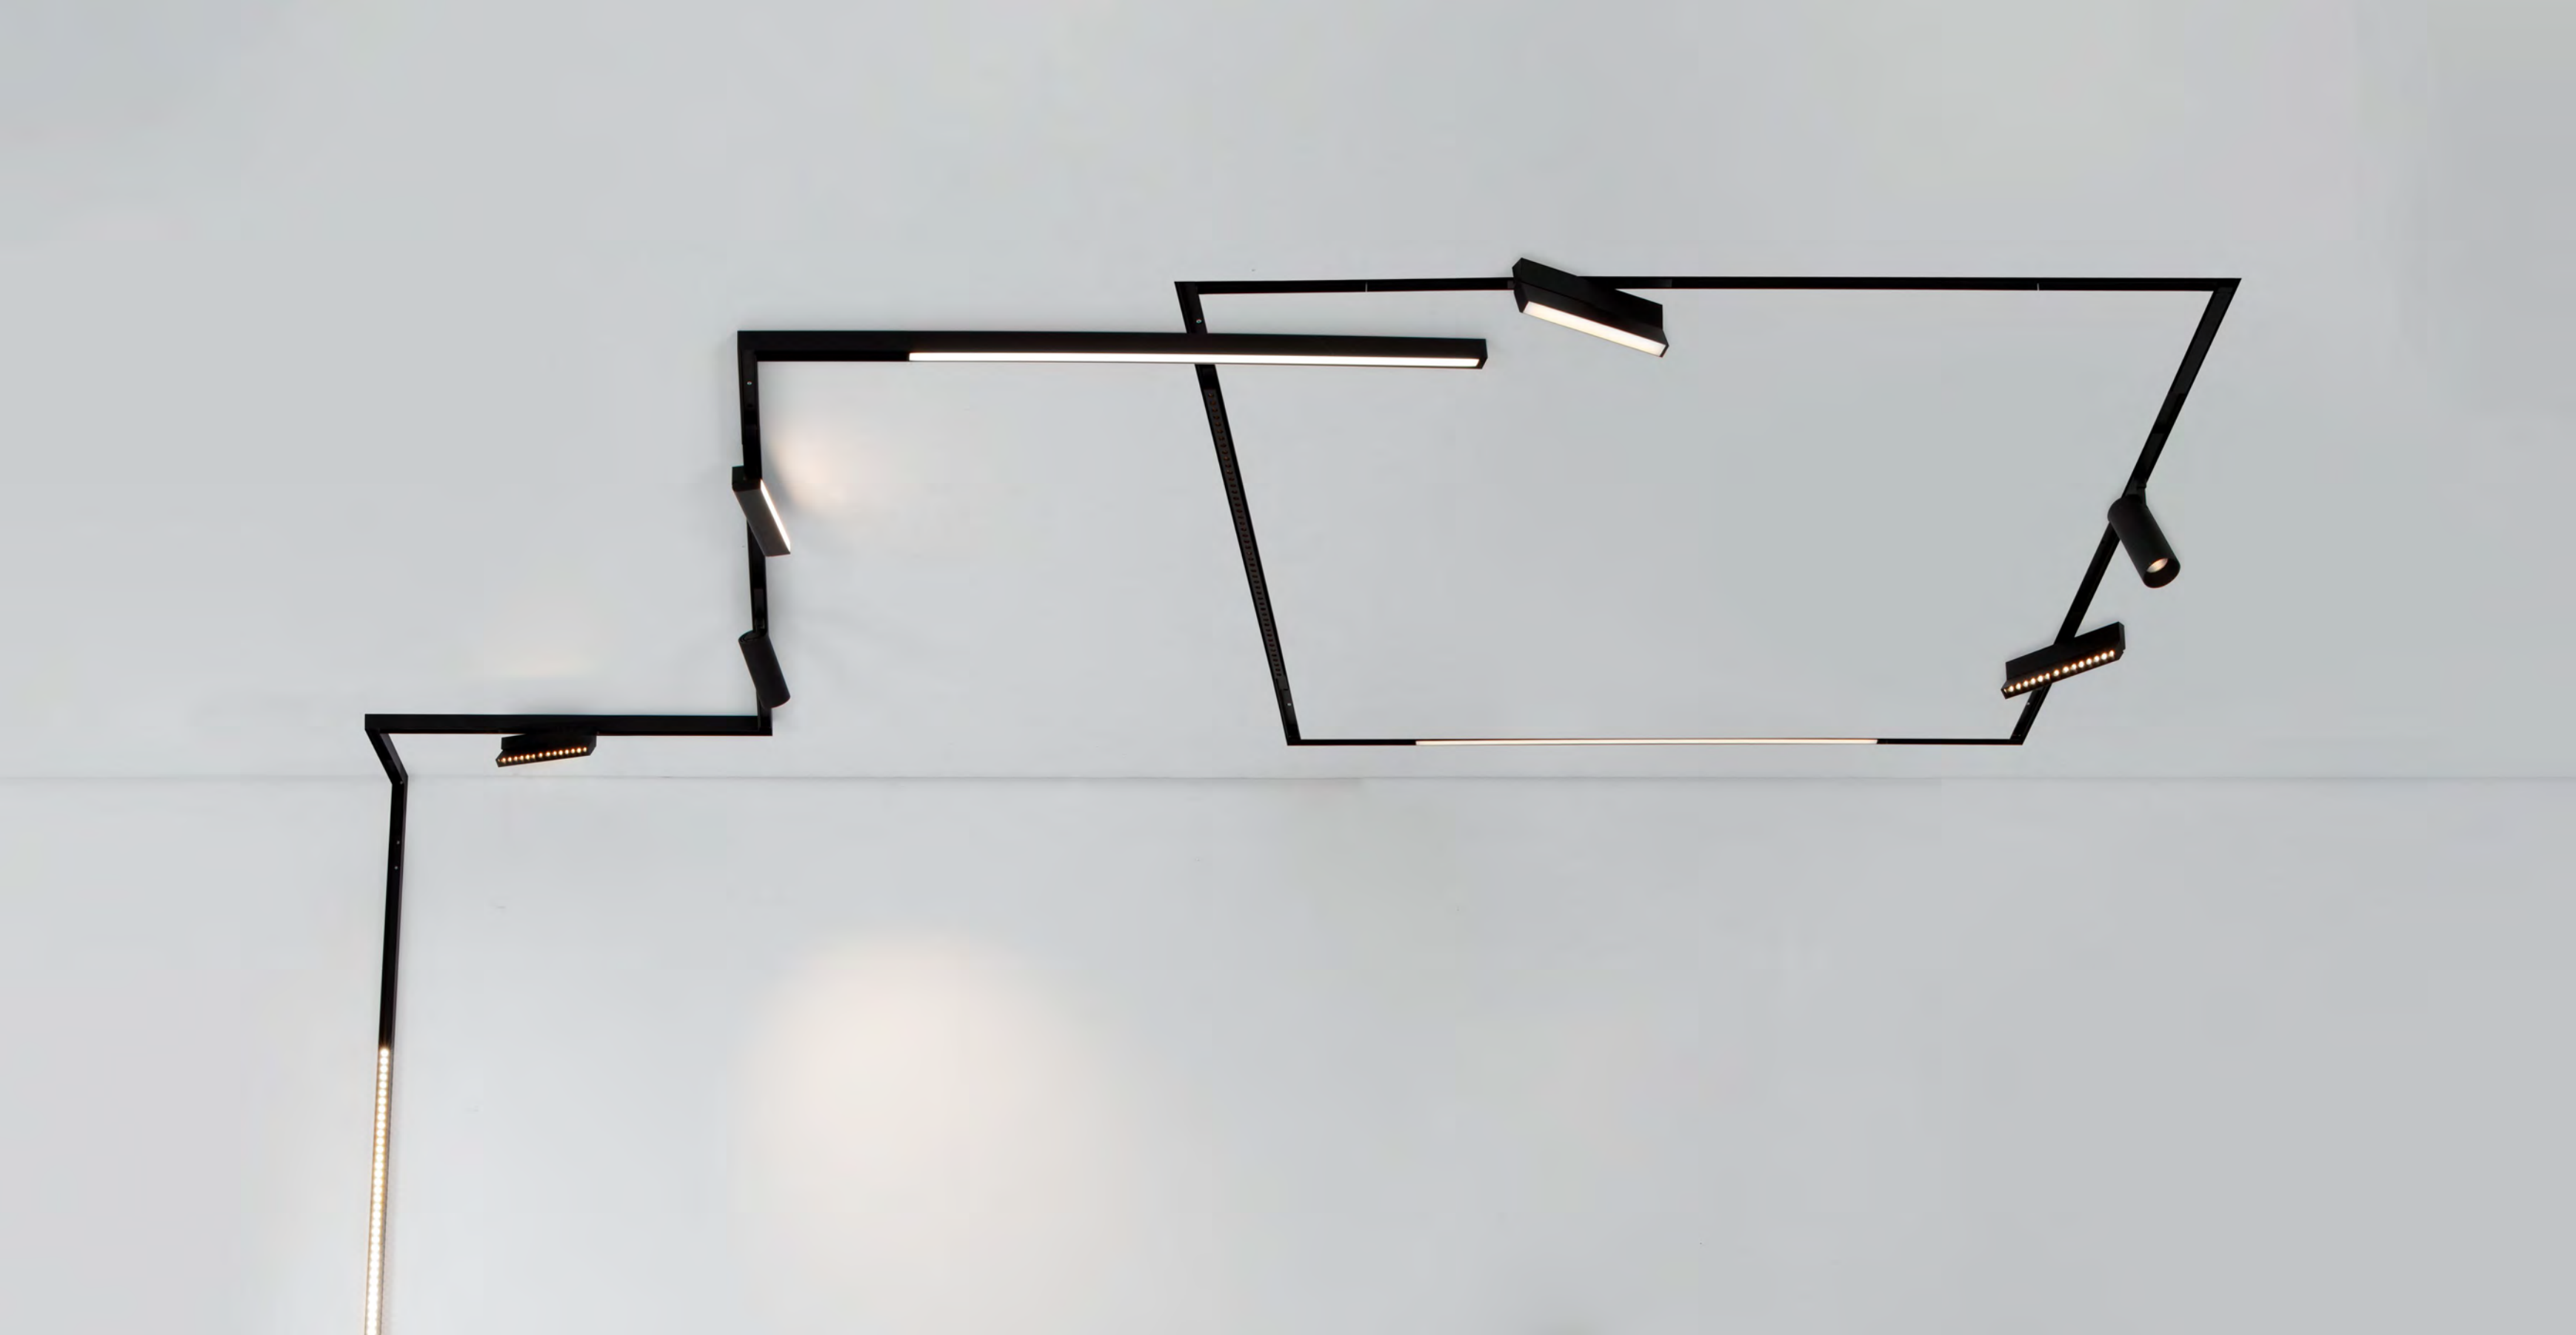


Planet PRO
24V ON/OFF
48V TRIAC





Planet is one of our **most popular track lighting ranges**, celebrated for its **versatility, sleek design**, and **reliable performance**. Available in both **24V (On/Off)** and **48V (Triac Dimming)** versions, it offers two **CCT options: 2700K and 3000K**, adapting effortlessly to a range of atmospheres and environments. With **unlimited configuration possibilities**, Planet supports an extensive lineup of **spotlights** and **linear modules**, making it a top choice for **residential and commercial spaces** that demand **flexibility, quality**, and **creative lighting solutions**.

Planet

RECESSED APPLICATION with gap





TRACKS & ACCESSORIES






		CODE		DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9136100	●	1m Track (max 300w)	
		9136335	●	2m Track (max 300w)	
CORNERS		9236105	●	Vertical 90° Connector	
		9136303	●	Horizontal 90° Connector	
CONNECTORS		9236106	●	Linear Electrical Connector	
		9811361	●	Mechanical Connector	
		9136111	●	End Caps	
		9236107	●	Power Connector	

Planet

RECESSED APPLICATION without gap

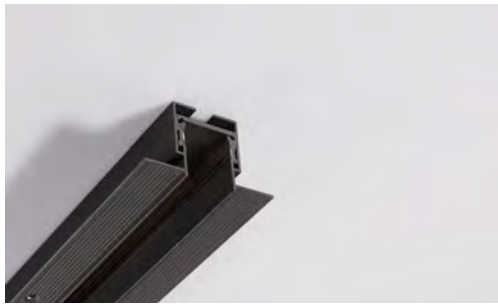

TRACKS & ACCESSORIES


		CODE		DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9999100	●	1m Track (max 300w)	
		9999101	●	2m Track (max 300w)	
CORNERS		9999120	●	Vertical 90° Connector, Cut-Out: 3.45cm	
		9999110	●	Horizontal 90° Connector, Cut-Out: 3.45cm	
CONNECTORS		9236106	●	Linear Electrical Connector	
		9811361	●	Mechanical Connector	
		9999130	●	End Caps	
		9236107	●	Power Connector	

Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP20	8252019	60 Watt, 220-240VAC, 24VDC	
	8252020	120 Watt, 220-240VAC, 24VDC	
	8252021	180 Watt, 220-240VAC, 24VDC	
IP67	9621508	75 Watt, 100-240VAC, 24VDC 1A	L 14 W 6.3 H 3.2
	9621509	100 Watt, 100-240VAC, 24VDC 1.1A	L 14 W 6.3 H 3.2
	9621510	150 Watt, 100-240VAC, 24VDC 2A	L 18 W 6.3 H 3.55
	9621511	200 Watt, 100-240VAC, 24VDC 2.4A	L 19.9 W 6.3 H 3.55













For Triac or Dali Application you should use			
	CODE	DESCRIPTION	DIMENSIONS (CM)
CONTROLLERS REMOTE DRIVERS	9621504	75 Watt, 100-240VAC, 48VDC 3.1A, IP67	L 14 W 6.3 H 3.2
	9621505	100 Watt, 100-240VAC, 48VDC 4A, IP67	L 14 W 6.3 H 3.2
	9621506	150 Watt, 100-240VAC, 48VDC 6.25A, IP67	L 18 W 6.3 H 3.55
	9621507	200 Watt, 100-240VAC, 48VDC 8.3A, IP67	L 19.9 W 6.3 H 3.55
CONTROLLERS	9136151	Triac Controller 288W	L 16 W 4.7 H 2.2
	9146151	Dali Controller one Channel 288W	L 16 W 4.7 H 2.2

Planet

SURFACE MOUNTED ACCESSORIES USAGE

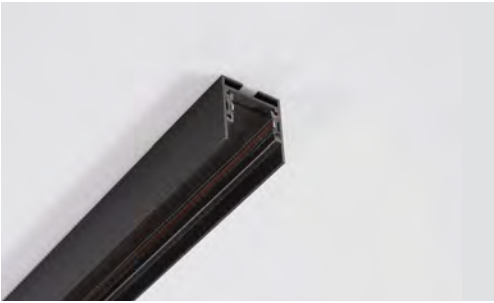

TRACKS & ACCESSORIES












		CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9110020	● 1m Track (Max 300W)	
		9110021	● 2m Track (Max 300W)	
CORNERS		9110024	● Vertical 90° Connector	
		9110022	● Horizontal 90° Connector	
CONNECTORS		9236106	● Linear Electrical Connector	
		9811361	● Mechanical Connector	
		9910010	● End Caps	
SUSPENSION CATEGORIES		9366462	● Connector Tube 10cm	
		9366461	● Connector Tube 10cm With Power Connector	
		9136323	● Connector Tube 37.3cm	
		9136360	● Connector Tube 37.3cm With Power Connector	
		9236323	● Connector Tube 70cm	
		9236360	● Connector Tube 70cm With Power Connector	
		9920015	● Set Of Accessories	
		9811362	● Screws	
		9010416	● Track Driver 100 Watt	
		9010417	● Track Driver 200 Watt	
DRIVERS		9010215	● Driver Box, Driver Included, Power 160W	

Planet

SURFACE MOUNTED ACCESSORIES USAGE




TRACKS & ACCESSORIES

		CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9136101	● 1m Track (max 300w)	
		9136338	● 2m Track (max 300w)	
CORNERS		9136105	● Vertical 90° Connector	
		9136290	● Horizontal 90° Connector	
CONNECTORS		9236106	● Linear Electrical Connector	
		9811361	● Mechanical Connector	
		9136110	● End Caps	
SUSPENSION CATEGORIES		9366462	● Connector Tube 10cm	
		9366461	● Connector Tube 10cm With Power Connector	
		9136323	● Connector Tube 37.3cm	
		9136360	● Connector Tube 37.3cm With Power Connector	
		9236323	● Connector Tube 70cm	
		9236360	● Connector Tube 70cm With Power Connector	
		9920015	● Set Of Accessories	
		9811362	● Screw	
		9010416	● Track Driver 100 Watt	
		9010417	● Track Driver 200 Watt	
DRIVERS		9010214	● Driver Box, Driver Included, Power 160W	

CHEAT SHEET FOR CONNECTORS

S: SURFACE
G: RECESSED WITH GAP
NG: RECESSED NO GAP

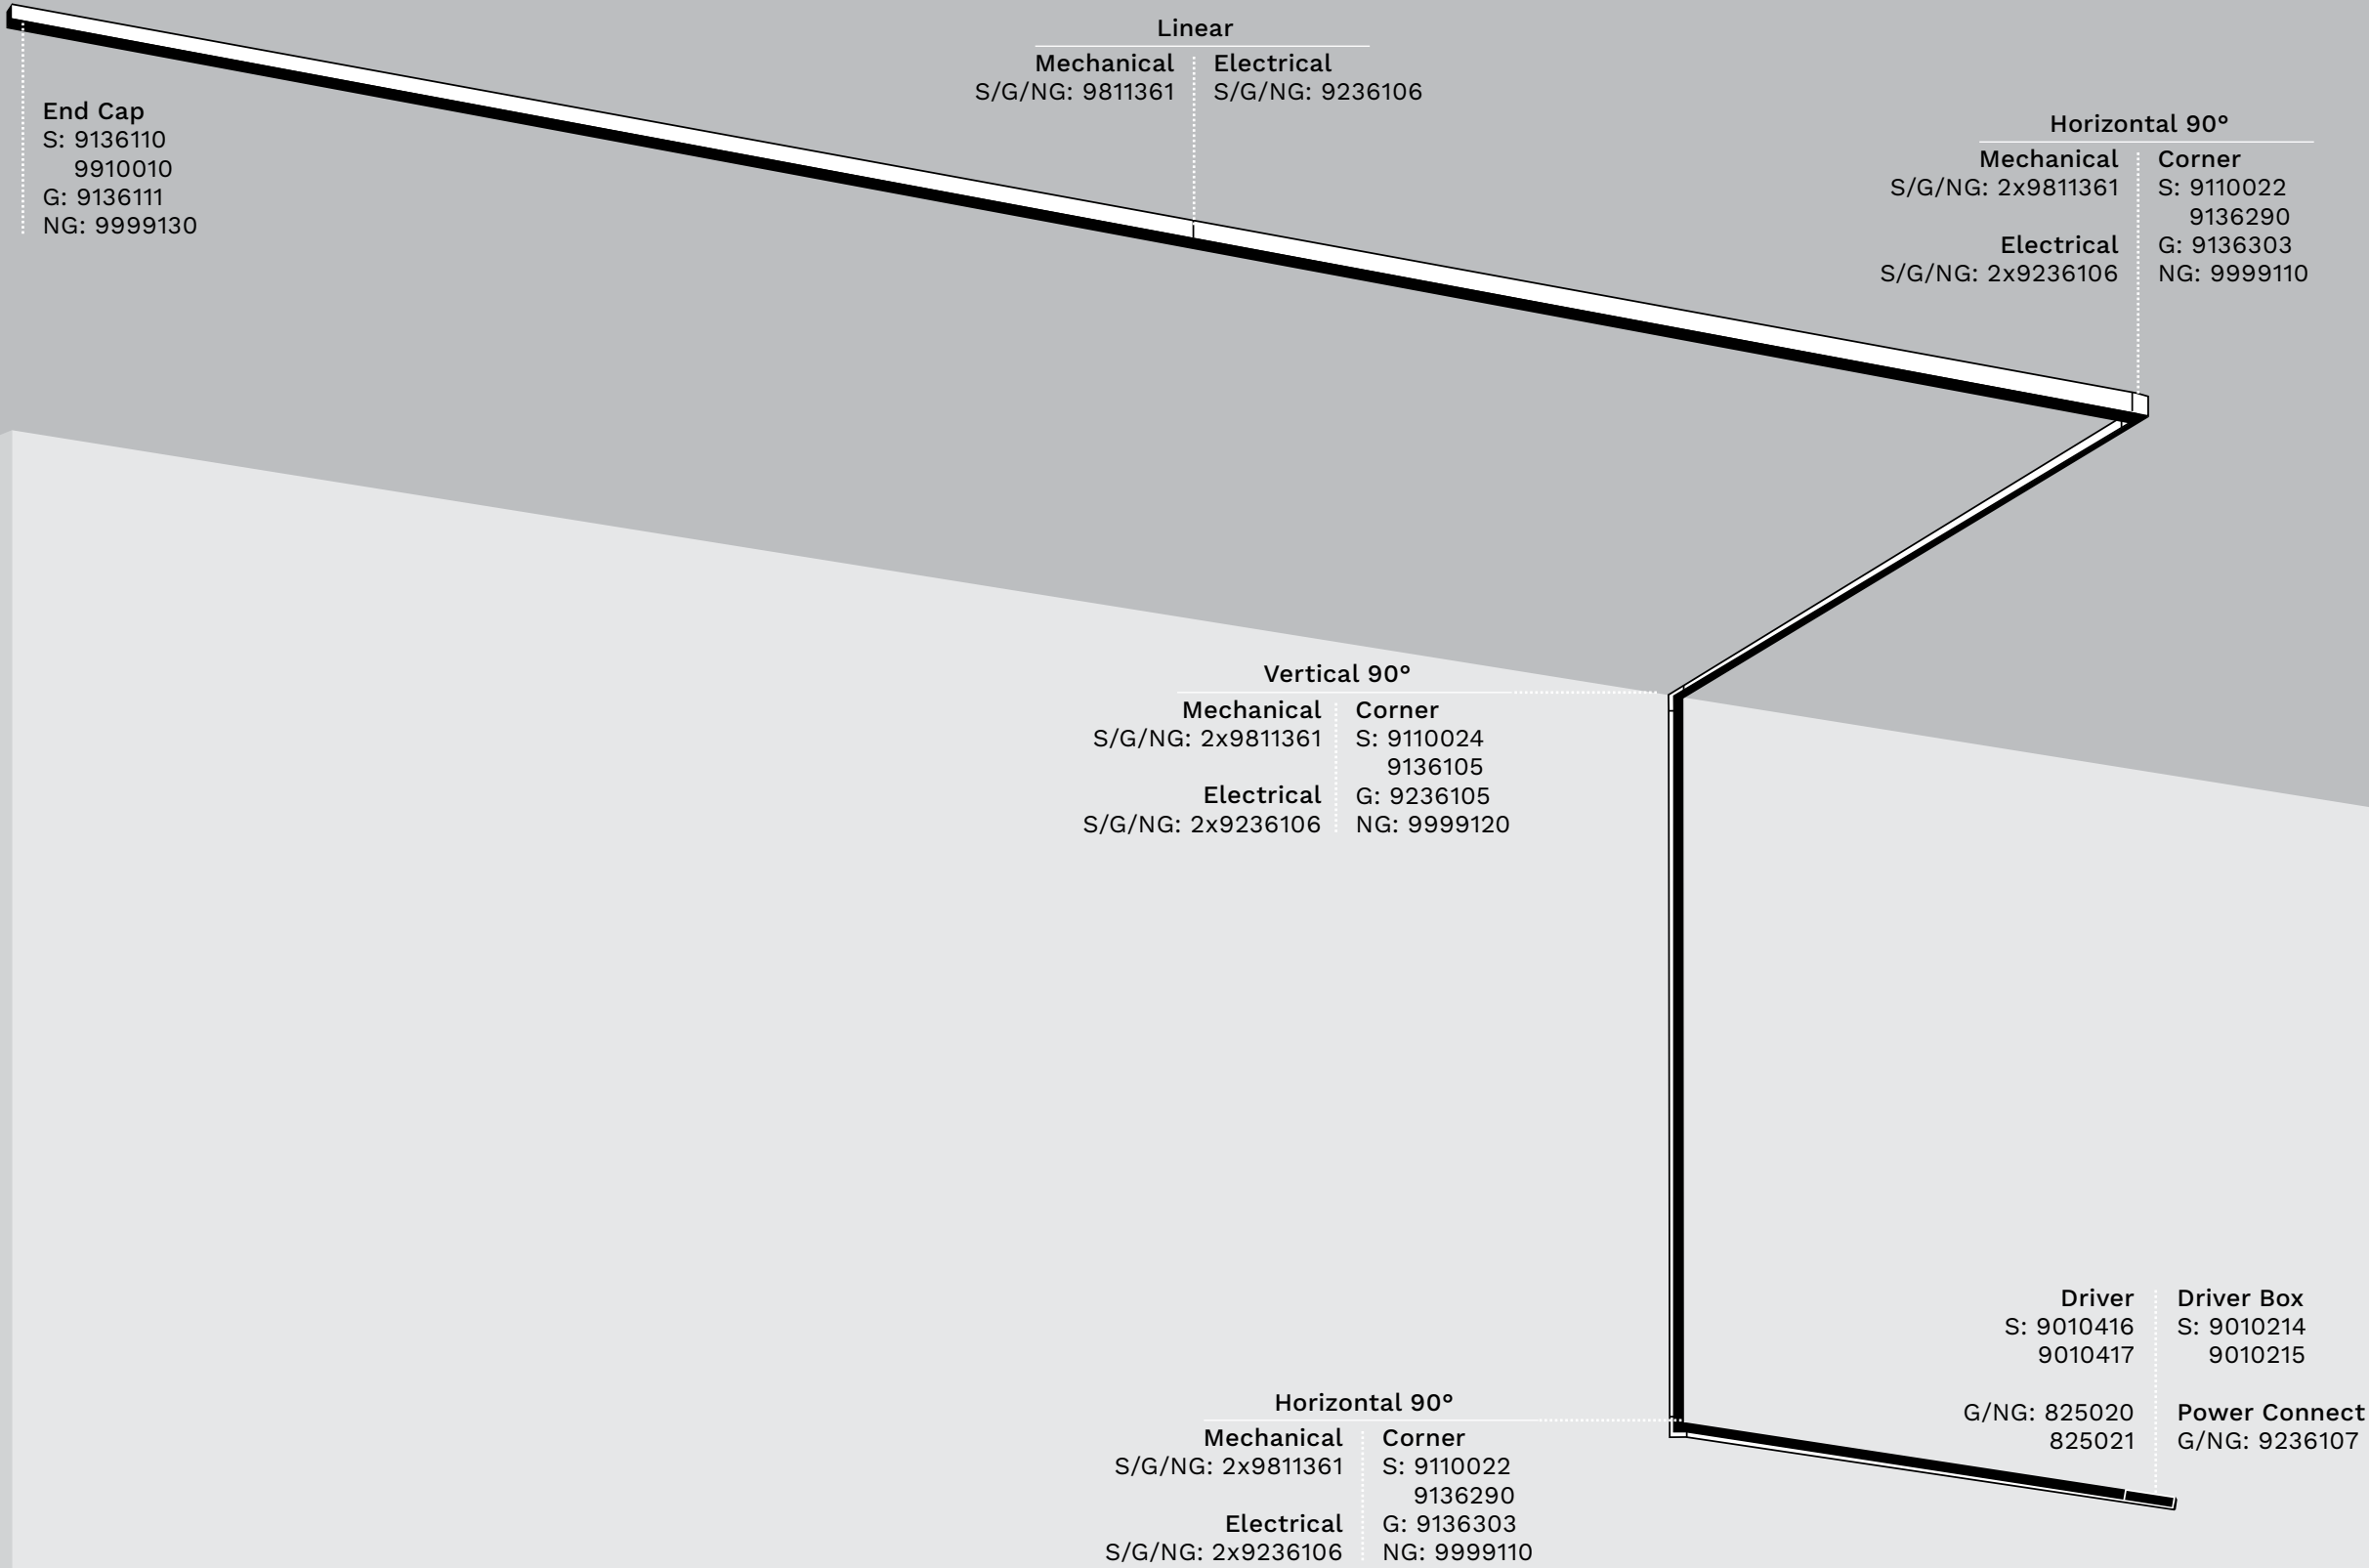



Lighting Modules



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9146145	● 13W	2700K	534Lm	L 50 H 3	48Vdc	Triac/Dali
9136121	● 13W	3000K	400Lm	L 50 H 3	24Vdc	On/Off
9136145	● 13W	3000K	534Lm	L 50 H 3	48Vdc	Triac/Dali
9136120	● 26W	3000K	1069Lm	L 100 H 3	24Vdc	On/Off
9136146	● 26W	3000K	1348Lm	L 100 H 3	48Vdc	Triac/Dali



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9146143	● 13W	2700K	534Lm	L 50 H 3	48Vdc	Triac/Dali
9136130	● 13W	3000K	350Lm	L 50 H 3	24Vdc	On/Off
9136143	● 13W	3000K	534Lm	L 50 H 3	48Vdc	Triac/Dali
9136131	● 26W	3000K	1200Lm	L 100 H 3	24Vdc	On/Off
9136144	● 26W	3000K	1441Lm	L 100 H 3	48Vdc	Triac/Dali



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9146149	● 15W	2700K	1059Lm	L 24.5 W 2 H 11	48Vdc	Triac/Dali
9136124	● 15W	3000K	750Lm	L 24.5 W 2 H 11	24Vdc	On/Off
9136149	● 15W	3000K	1059Lm	L 24.5 W 2 H 11	48Vdc	Triac/Dali



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136125	● 15W	3000K	252Lm	L 24.5 W 2 H 11	24Vdc	On/Off
9136150	● 15W	3000K	421Lm	L 24.5 W 2 H 11	48Vdc	Triac/Dali



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9070128	● 3W	3000K	157Lm	L 3.6 W 2.2 H 3	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136194	● 6W	3000K	175Lm	L 10.4 W 2.2 H 31.2	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136193	● 6W	3000K	278Lm	L 10.4 W 2.2 H 31.2	24Vdc	On/Off





5mm ESSENTIAL
24V

Our **24V track with a 5mm opening** is one of the **smallest and most discreet systems on the market**, offering an ultra-minimal profile without compromising on performance. Available in both **surface-mounted** and **recessed versions**, it supports a wide range of **linear lighting modules**, **suspended fixtures**, and **spotlights**. This ultra-slim track is perfect for modern interiors that demand **clean lines**, **elegant design**, and **precise, high-quality lighting** in a compact form.









LOW VOLTAGE TRACKS - 5MM

5mm

SURFACE - PENDANT APPLICATION




TRACKS & ACCESSORIES

		CODE		DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9580750	●	1m Track (Max 200W)	
		9580751	●	2m Track (Max 200W)	
CURVED TRACKS		9580754	●	Curved Track 40cm / 90°	
		9580755	●	Curved Track 55cm / 90°	
POWER FEED		9580756	●	Power Connector with short cable	
		9580757	●	Power Connector with 1,5m cable	
CONNECTORS		9580758	●	Electrical connector for Corner	
		9580759	●	Linear Electrical Connector	
		9580764	●	Horizontal 90° Corner	
		9580765	●	Vertical 90° Corner	
		9580766	●	Surface Mechanical Connector	
		9580760	●	End caps	
OTHER ACCESSORIES		9580767	●	Suspension Kit (2m wire)	
DRIVER		9580810	●	100W Driver on Track	








LOW VOLTAGE TRACKS - 5MM

5mm

RECESSED APPLICATION without gap

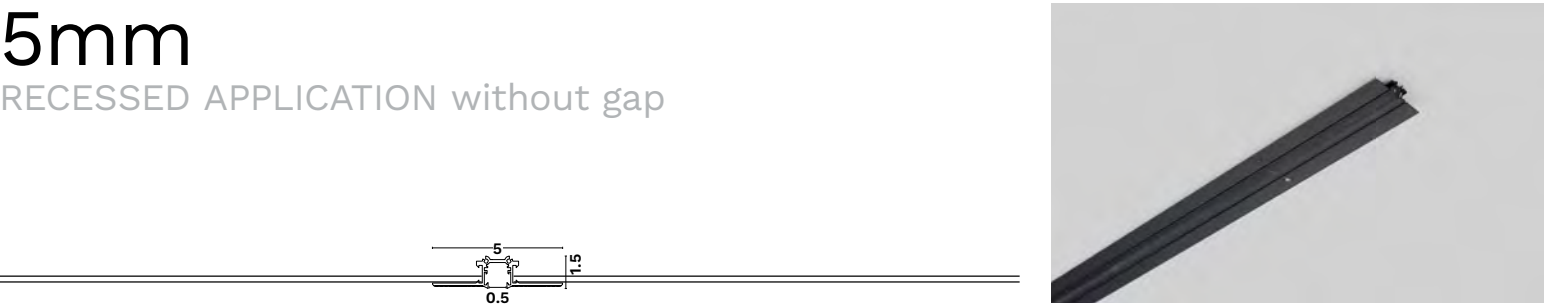


TRACKS & ACCESSORIES

		CODE		DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9580752	●	1m Track (Max 200W)	
		9580753	●	2m Track (Max 200W)	
CURVED TRACKS		9580754	●	Curved Track 40cm / 90°	
		9580755	●	Curved Track 55cm / 90°	
POWER FEED		9580756	●	Power Connector with short cable	
		9580757	●	Power Connector with 1,5m cable	
CONNECTORS		9580758	●	Electrical connector for Corner	
		9580759	●	Linear Electrical Connector	
		9580761	●	Horizontal 90° Corner	
		9580762	●	Vertical 90° Corner	
		9580763	●	Mechanical Connector	
		9580760	●	End caps	

Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS (CM)
IP20	9580784	75W 220-240Vac, 24Vdc	L 18.7 W 4.5 H 3.05
	9580785	150W 24Vdc 220-240Vac, 24Vdc	L 18.7 W 4.5 H 3.05

CHEAT SHEET FOR CONNECTORS

S: SURFACE
R: RECESSED

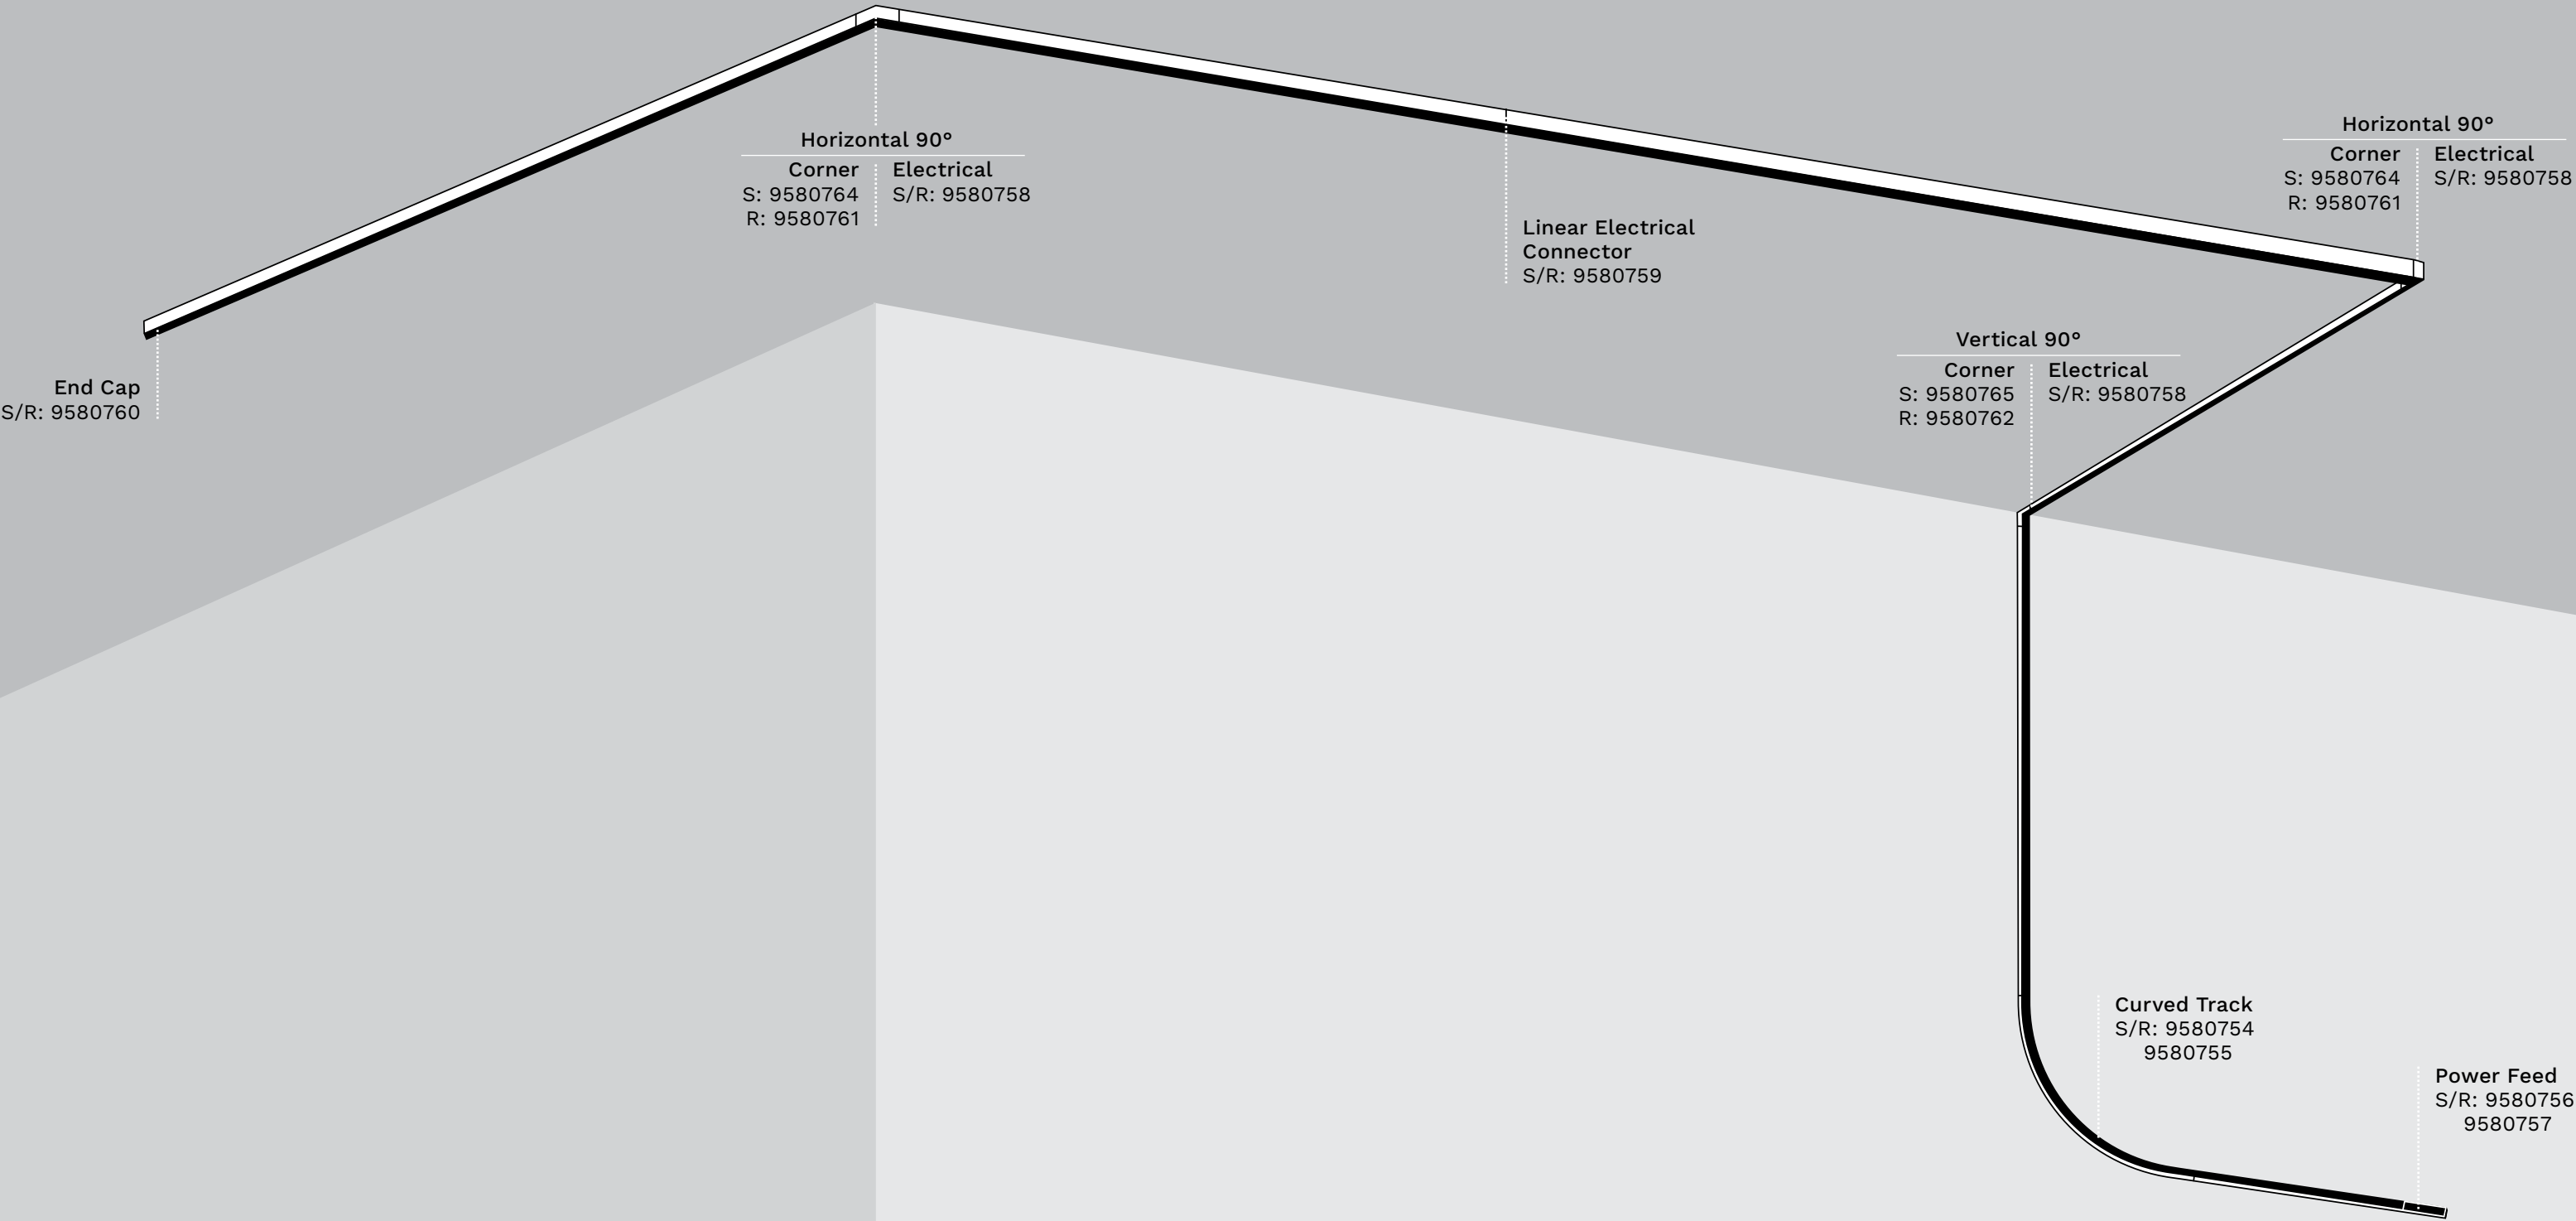



Lighting Modules




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE	
9580776 ●	5W	3000K	360Lm	L 30 W 0.5 H 1.2	24Vdc	On/Off	
9580777 ●	10W	3000K	710Lm	L 60 W 0.5 H 1.2	24Vdc	On/Off	
9580778 ●	15W	3000K	1060Lm	L 90 W 0.5 H 1.2	24Vdc	On/Off	

>20,000 HOURS icon"/>



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580781 ●	8W	3000K	250Lm	L 30 W 1 H 1.8	24Vdc	On/Off

>20,000 HOURS icon"/>

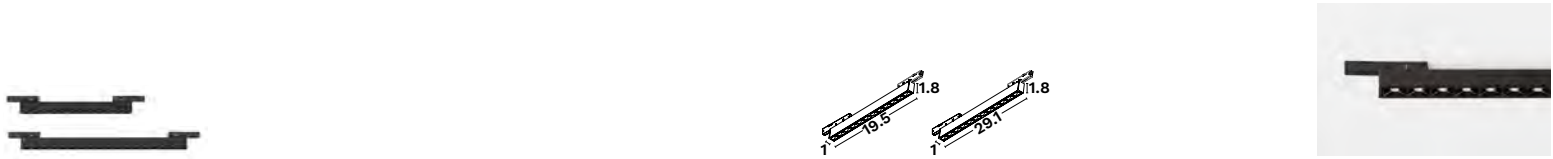

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580782 ●	10W	3000K	430Lm	L 19.5 W 1.5 H 1.8	24Vdc	On/Off
9580783 ●	15W	3000K	649Lm	L 29.1 W 1.5 H 1.8	24Vdc	On/Off

>20,000 HOURS icon"/>



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580770 ○	3W	3000K	100Lm	D 6 H 7	24Vdc	On/Off

>20,000 HOURS icon"/>



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580775 ●	12W	3000K	510Lm	D 11.3 H 3.4	24Vdc	On/Off

>20,000 HOURS icon"/>



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580768 ○	8W	3000K	170Lm	L 100 W 1 H 0.5	24Vdc	On/Off
9580769 ○	16W	3000K	300Lm	L 200 W 1 H 0.5	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580771 ●	5W	3000K	370Lm	D 3.5 H 5.8	24Vdc	On/Off
9580772 ●	9W	3000K	590Lm	D 4.5 H 5.8	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580773 ●	5W	3000K	285Lm	D 6 H 5.5	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580774 ●	5W	3000K	350Lm	D 6 H 5.5	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580779 ●	7W	3000K	320Lm	D 4 H 150	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580780 ●	3W	3000K	68Lm	D 6 H 150	24Vdc	On/Off



SHALLOW PRO
24V

The **24V low-profile mechanical track** features a **slim 7mm height**, ideal for spaces that require discreet, space-efficient lighting solutions. Available in both **recessed** and **surface-mounted versions**, it offers versatile installation options to suit different architectural needs. The track comes in **black and white finishes**, allowing seamless integration with various interior styles. Compatible with a wide range of **lighting modules**—including **spotlights**, **linear fixtures**, and **suspended elements**—this system provides a flexible and elegant solution for both residential and commercial applications.








LOW VOLTAGE TRACKS - SHALLOW

Shallow

SURFACE




TRACKS & ACCESSORIES

		CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9580720 ●	1m Track (Max100W)	
		9580650 ○	max 20m Connection Systems	
		9580721 ●	2m Track (Max100W)	
		9580651 ○	max 20m Connection Systems	
POWER FEED		9580743 ●	Power Feed	
		9580668 ○		
CONNECTORS		9580738 ●	T Electrical / Mechanical Connector	
		9580663 ○		
		9580739 ●	+ Electrical / Mechanical Connector	
		9580664 ○		
		9580740 ●	Horizontal 0-90° adjustable Electrical / Mechanical Connector	
		9580665 ○		
		9580741 ●	Vertical 90° Electrical / Mechanical Connector	
		9580666 ○		
DRIVERS		9580742 ●	Linear Connector	
		9580667 ○		
		9580669 ○	Triac 150W on track driver	
		9580716 ●	On/Off 180W on track driver	
		9580717 ●	Triac 180W on track driver	
		9580718 ●	On/Off 250W on track driver	
		9580719 ●	Triac 250W on track driver	




LOW VOLTAGE TRACKS - SHALLOW

Shallow

RECESSED




TRACKS & ACCESSORIES

		CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9580722 ●	1m Track (Max100W)	
		9580652 ○	max 20m Connection Systems	
		9580723 ●	2m Track (Max100W)	
		9580653 ○	max 20m Connection Systems	
POWER FEED		9580743 ●	Power Feed	
		9580668 ○		
CONNECTORS		9580738 ●	T Electrical / Mechanical Connector	
		9580663 ○		
		9580739 ●	+ Electrical / Mechanical Connector	
		9580664 ○		
		9580740 ●	Horizontal 0-90° adjustable Electrical / Mechanical Connector	
		9580665 ○		
		9580741 ●	Vertical 90° Electrical / Mechanical Connector	
		9580666 ○		
DRIVER		9580742 ●	Linear Connector	
		9580667 ○		
		9580670 ●	Triac Remote Driver 150W, 24Vdc	

CHEAT SHEET FOR CONNECTORS

S: SURFACE
R: RECESSED

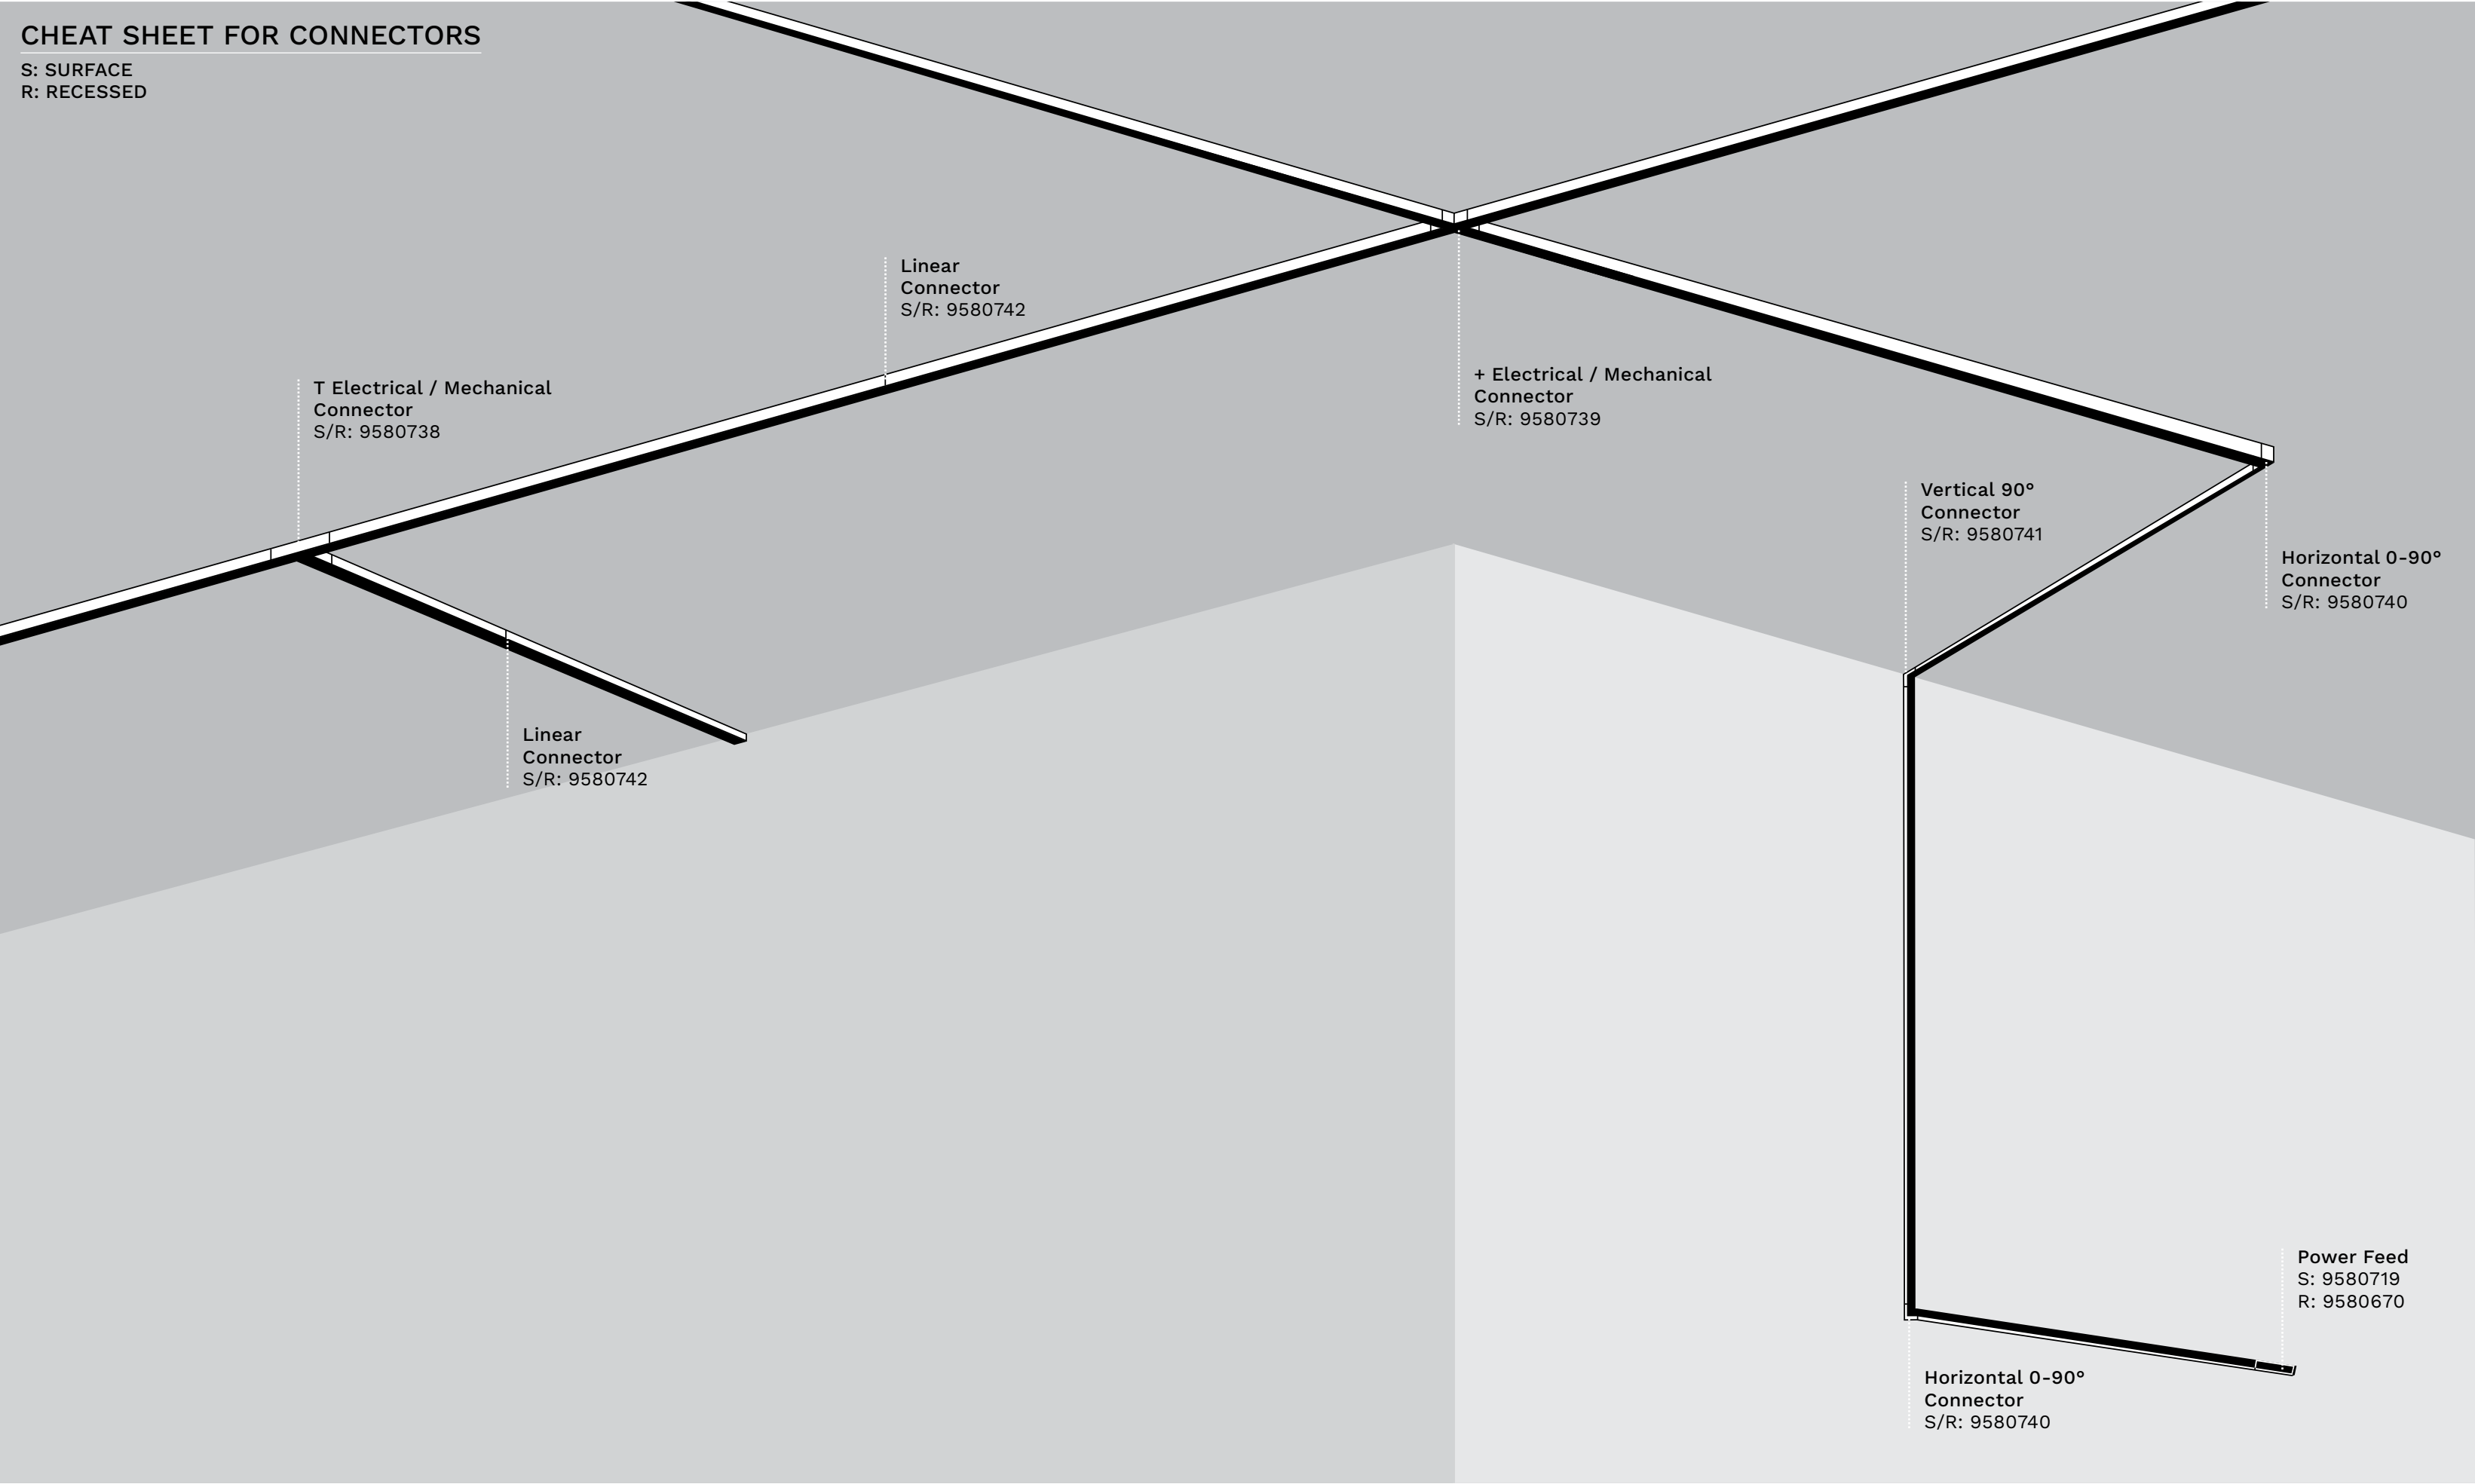




Lighting Modules









CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580726 ●	3W	3000K	87Lm	L 12 W 2.4 H 2.6	24Vdc	Triac
9580727 ●	6W	3000K	212Lm	L 23.6 W 2.4 H 2.6	24Vdc	Triac






CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580724 ●	6W	3000K	453Lm	L 12 W 2.4 H 2.6	24Vdc	Triac
9580654 ○	6W	3000K	453Lm	L 12 W 2.4 H 2.6	24Vdc	Triac
9580725 ●	12W	3000K	673Lm	L 23.6 W 2.4 H 2.6	24Vdc	Triac
9580655 ○	12W	3000K	673Lm	L 23.6 W 2.4 H 2.6	24Vdc	Triac






CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580731 ●	5W	3000K	435Lm	D 4.5 H 6	24Vdc	Triac
9580732 ●	10W	3000K	846Lm	D 5.5 H 7.2	24Vdc	Triac
9580733 ●	15W	3000K	1001Lm	D 6.5 H 8	24Vdc	Triac



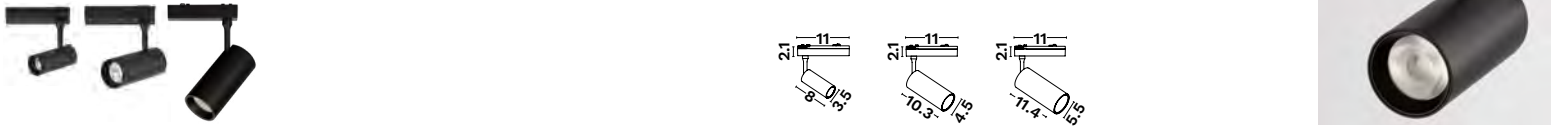


CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580728 ●	7W	3000K	560Lm	D 3.5 H 8	24Vdc	Triac
9580656 ○	7W	3000K	560Lm	D 3.5 H 8	24Vdc	Triac
9580729 ●	12W	3000K	794Lm	D 4.5 H 10.3	24Vdc	Triac
9580657 ○	12W	3000K	794Lm	D 4.5 H 10.3	24Vdc	Triac
9580730 ●	18W	3000K	1117Lm	D 5.5 H 11.4	24Vdc	Triac
9580658 ○	18W	3000K	1117Lm	D 5.5 H 11.4	24Vdc	Triac






CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580736 ●	5W	3000K	1357Lm	L 106.4 W 2.3 H 5.5	24Vdc	Triac
9580661 ○	5W	3000K	1357Lm	L 106.4 W 2.3 H 5.5	24Vdc	Triac

>50,000 HOURS icon"/>




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580734 ●	5W	3000K	96Lm	D 1.5 H 120	24Vdc	Triac
9580659 ○	5W	3000K	96Lm	D 1.5 H 120	24Vdc	Triac

>50,000 HOURS icon"/>




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580735 ●	5W	3000K	403Lm	D 5 H 120	24Vdc	Triac
9580660 ○	5W	3000K	403Lm	D 5 H 120	24Vdc	Triac

>50,000 HOURS icon"/>



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580737 ●	5W	3000K	799Lm	L 106.4 W 2.3 H 5.5	24Vdc	Triac
9580662 ○	5W	3000K	799Lm	L 106.4 W 2.3 H 5.5	24Vdc	Triac

>50,000 HOURS icon"/>

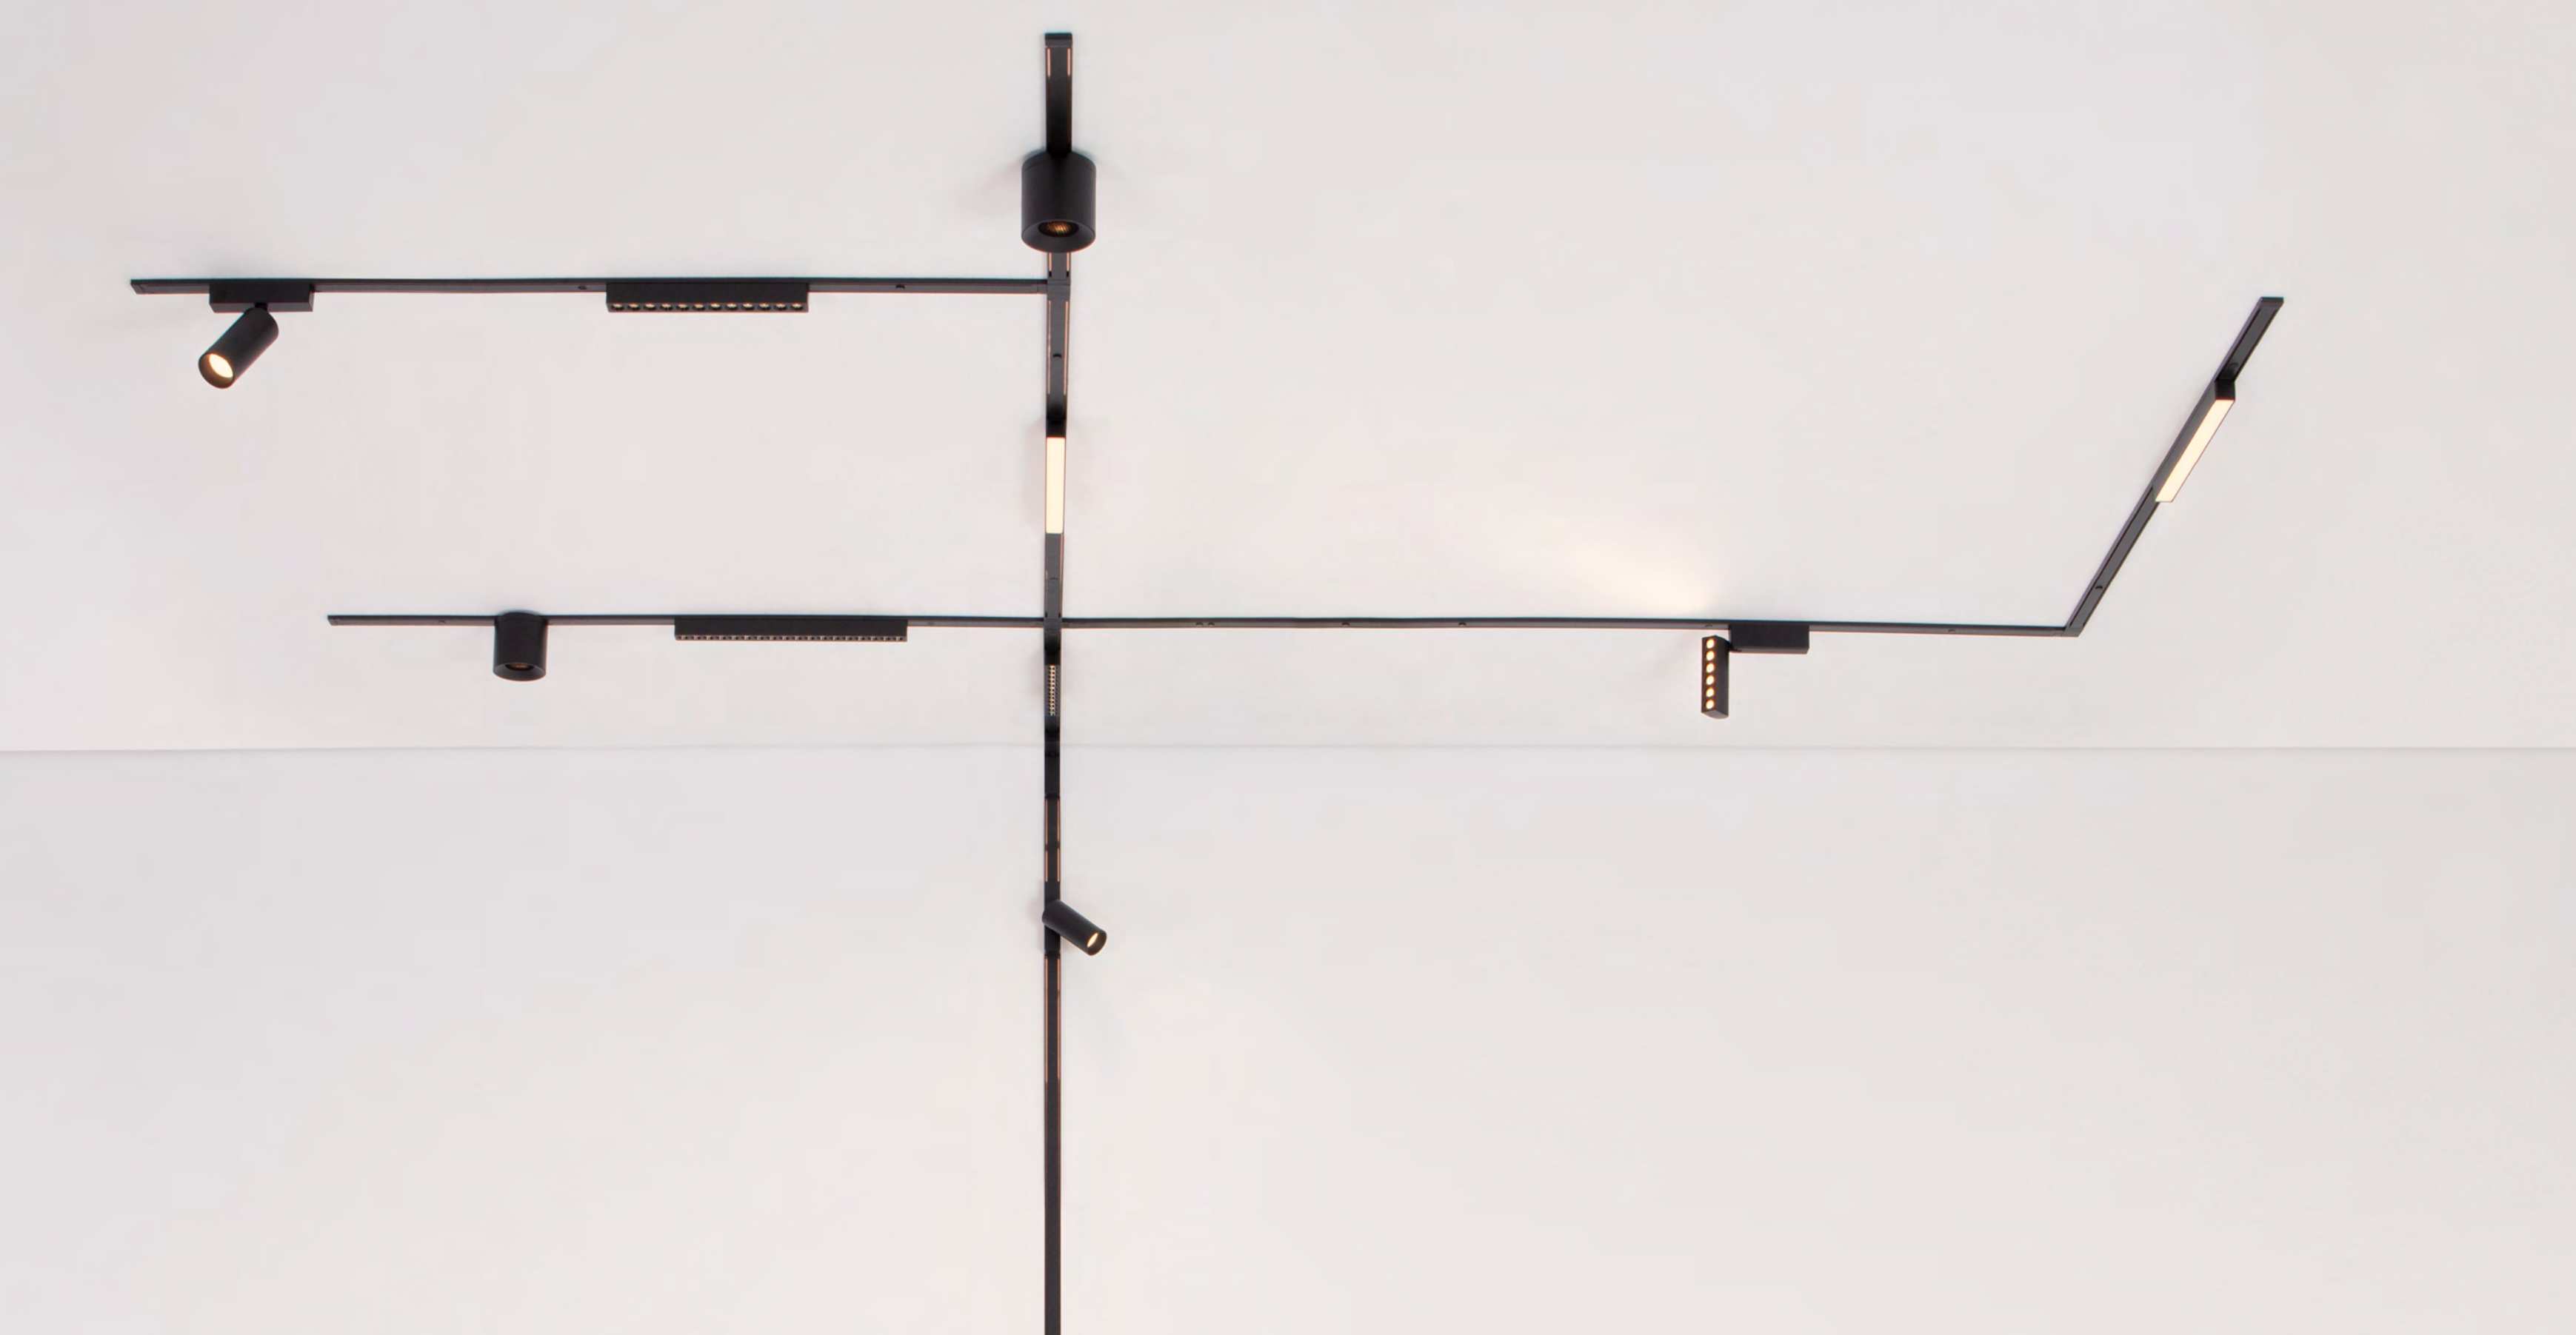


FLAT ESSENTIAL
48V









Flat 48V track features a **slim 6mm height**, offering a **low-profile surface-mounted** solution ideal for clean and modern interiors. Despite its minimal design, it supports a variety of **high-performance lighting modules**, including **spotlights** and **suspended luminaires**, providing both functional versatility and aesthetic appeal. Perfect for residential and commercial spaces where **discreet, surface-level lighting** is desired.

Flat


SURFACE MOUNTED ACCESSORIES USAGE

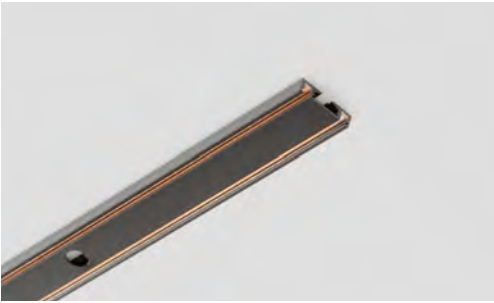


TRACKS & ACCESSORIES

		CODE		DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9580823	●	1m Track (48Vdc)	
		9580824	●	2m Track (48Vdc)	
CONNECTORS		9580825	●	Linear Mechanical / Electrical connector	
		9580826	●	Horizontal 90° Mechanical / Electrical Connector	
		9580829	●	Vertical 90° Mechanical / Electrical Connector	
		9580827	●	T Corner Mechanical / Electrical Connector	
		9580828	●	+ Corner Mechanical / Electrical Connector	
DRIVERS		9580830	●	Electrical connector for all Connections	
		9580831	●	Driver with Box 100W 48Vdc IP20	
		9580832	●	Driver with Box 200W 48Vdc IP20	
		9580833	●	Driver Cable Cover PC	





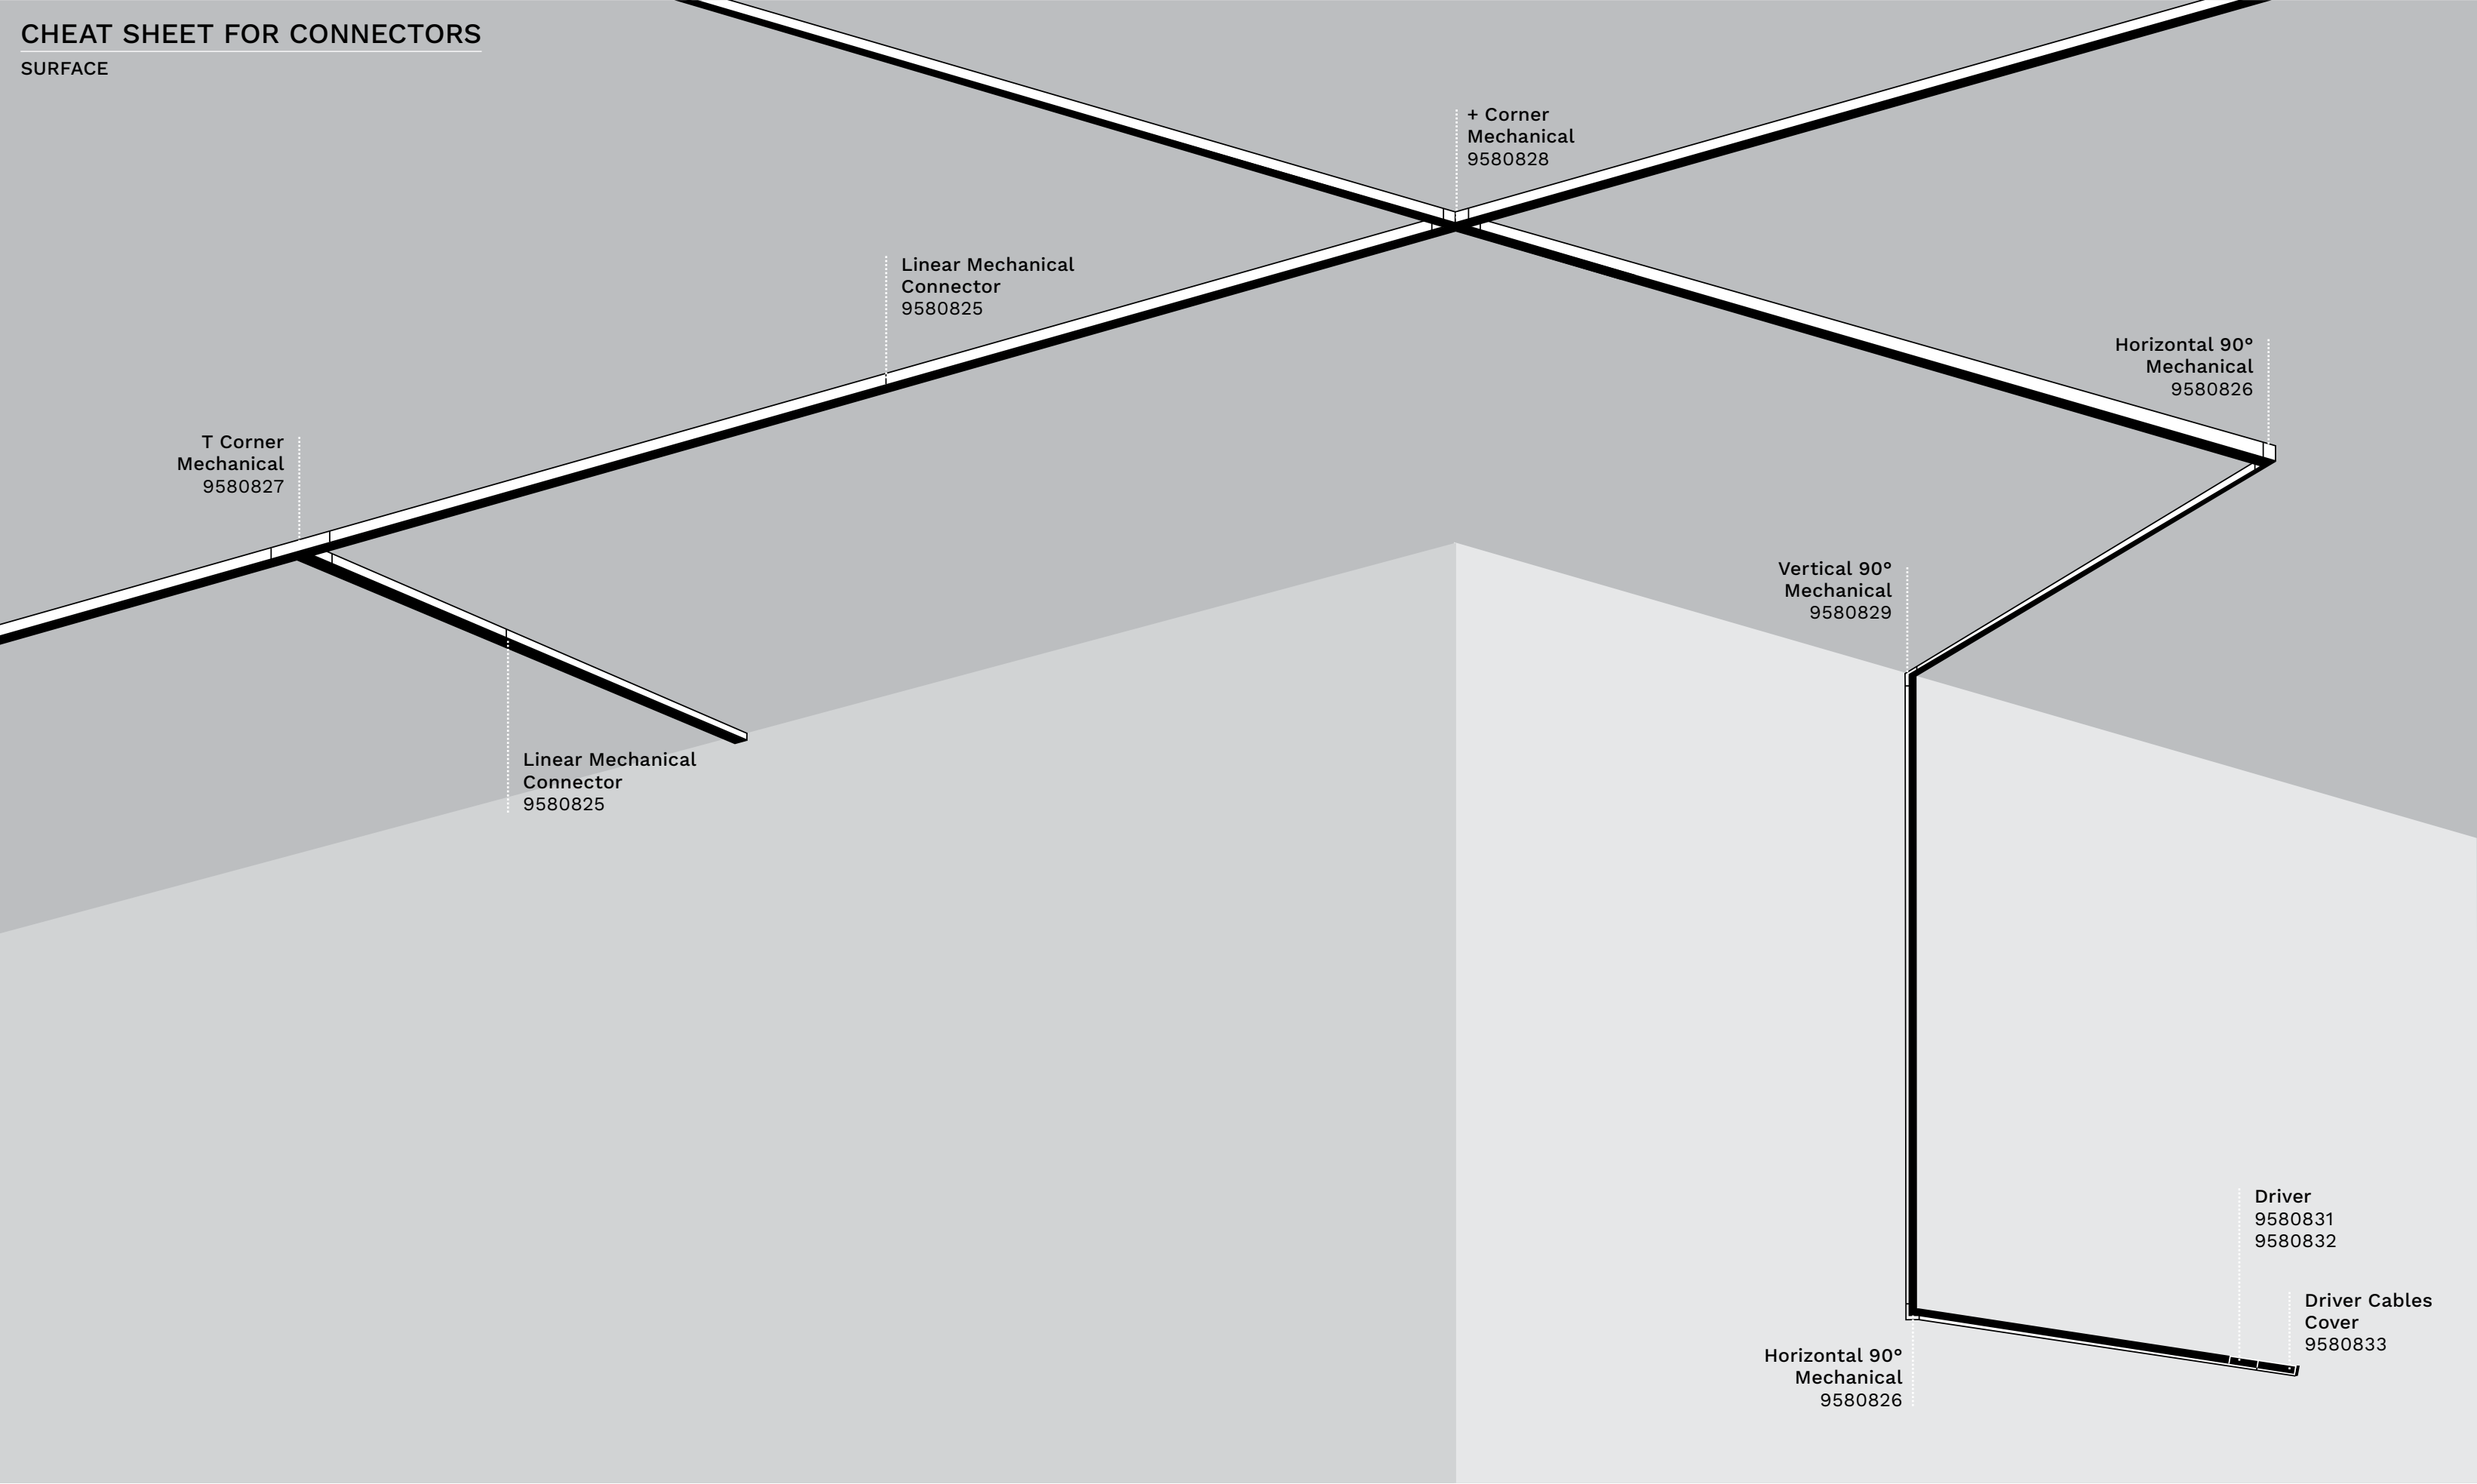

Lighting
Modules





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580812	● 12W	3000K	710Lm	L 23 W 2.6 H 2.4	48Vdc	On/Off
9580813	● 18W	3000K	1200Lm	L 33.8 W 2.6 H 2.4	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580814	● 10W	3000K	530Lm	L 31.5 W 2.6 H 2.4	48Vdc	On/Off
9580815	● 20W	3000K	920Lm	L 61.5 W 2.6 H 2.4	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580816	● 6W	3000K	400Lm	L 11.3 W 2.6 H 8	48Vdc	On/Off




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580817	● 10W	3000K	540Lm	D 4.5 H 10	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580818	● 6W	3000K	300Lm	D 7.6 H 7.5	48Vdc	On/Off



Lighting Modules



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580819	6W	3000K	260Lm	D 15 H 1.1	48Vdc	On/Off






CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580820	7W	3000K	430Lm	D 3 H 150	48Vdc	On/Off





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580821	3W	3000K	160Lm	D 8 H 150	48Vdc	On/Off





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9580822	6W	3000K	330Lm	D 8 H 150	48Vdc	On/Off






Breda PRO
48V

Breda is a **48V curved magnetic track** system designed for creative and fluid lighting layouts. Its flexible structure allows for **sweeping curves and custom shapes**, bringing a dynamic architectural element to any space. Compatible with a wide range of **magnetic lighting modules**, Breda supports **spotlights** and **linear fixtures** with either **prismatic diffusers** for soft, uniform light or **COB optics** for focused, high-output illumination. Ideal for spaces that demand both **aesthetic impact and performance**, Breda offers a versatile and elegant lighting solution.

Breda

SURFACE MOUNTED ACCESSORIES USAGE


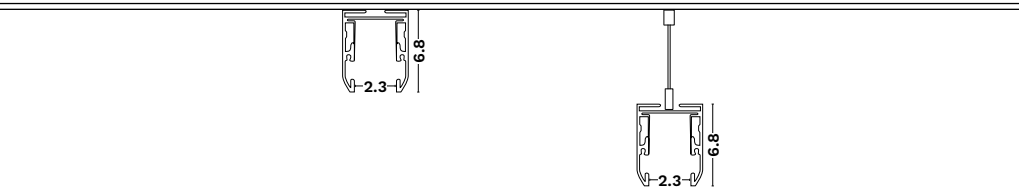


TRACKS & ACCESSORIES

		CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9010185	1m Track (max 300w)	
		9010186	2m Track (max 300w)	
CURVE TRACKS		9010192	Curve R:45	
		9010193	Curve R:60	
CIRCLE TRACKS		9010207	Circle D 90 cm	
		9010208	Circle D 120 cm	
		9010209	Circle D 150 cm	
CONNECTORS		9010200	+ Corner Mechanical-Electrical Connector	
		9010201	T Mechanical-Electrical Connector	
		9010194	Horizontal 90° Electrical / Mechanical Connector	
		9010195	Vertical 90° Electrical / Mechanical Connector	
		9010202	Linear Mechanical-Electrical Connector	
		9010203	Power Connector	
		9010189	End Cap	
SUSPENSION ACCESSORIES		9010211	Mount for Suspension for 9010210	
		9010210	Suspension Kit	
		9010213	Driver box 150 Watt	
POWER FEED		9010318	100 Watt, Non Flexible Input: 220-240Vac, Output: 48Vdc	
		9010319	200 Watt, Non Flexible Input: 220-240Vac, Output: 48Vdc	
		9010212	Driver with Box 144W 48Vdc	
Optional Accessories				
		9010130	Dali Bus 100-240V, Iout 220mA	

Breda

RECESSED APPLICATION without gap

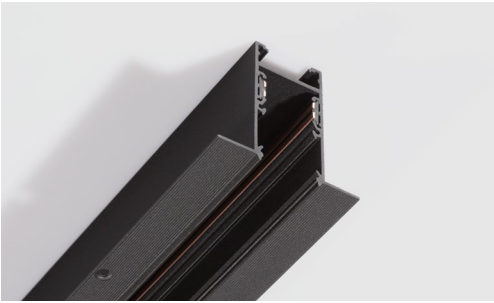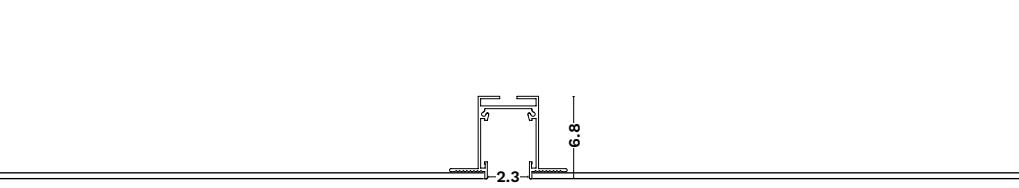


TRACKS & ACCESSORIES






		CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9010183	1m Track (max 300w) Cut-Out 3.6 cm	
		9010184	2m Track (max 300w) Cut-Out 3.6 cm	
CURVE TRACKS		9010190	Curve R:45	
		9010191	Curve R:60	
CIRCLE TRACKS		9010204	Circle D 90 cm Cut-Out: 3.6 cm	
		9010205	Circle D 120 cm Cut-Out: 3.6 cm	
		9010206	Circle D 150 cm Cut-Out: 3.6 cm	
CONNECTORS		9010198	+ Corner Mechanical-Electrical Connector	
		9010199	T Mechanical-Electrical Connector	
		9010196	Horizontal 90° Electrical / Mechanical Connector	
		9010197	Vertical 90° Electrical / Mechanical Connector	
		9010202	Linear Mechanical-Electrical Connector	
		9010203	Power Connector	
		9010189	End Cap	
Remote Drivers				
IP20		CODE	DESCRIPTION	DIMENSIONS (cm)
		9621500	75 Watt, 220-240VAC, 48VDC 1.6A	L 9.9 W 9.7 H 3
		9621501	100 Watt, 220-240VAC, 48VDC 2.3A	L 12.9 W 9.7 H 3
		9621502	150 Watt, 220-240VAC, 48VDC 3.3A	L 15.9 W 9.7 H 3
IP67		9621503	200 Watt, 220-240VAC, 48VDC 4.4A0	L 21.5 W 11.5 H 3
		9621504	75 Watt, 100-240VAC, 48VDC 1A	L 14 W 6.3 H 3.2
		9621505	100 Watt, 100-240VAC, 48VDC 1.1A	L 14 W 6.3 H 3.2
		9621506	150 Watt, 100-240VAC, 48VDC 2A	L 18 W 6.3 H 3.55
		9621507	200 Watt, 100-240VAC, 48VDC 2.4A	L 19.9 W 6.3 H 3.55

Breda Flexible

UPSIDE LIGHT LED






TRACKS & ACCESSORIES

		CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9010187 ●	1m Track (max 300W)	
		9010188 ●	2m Track (max 300W)	
		9010210 ●	Suspension Kit	
		9010211 ●	Mount for Suspension for 9010210	
POWER FEED		9010318 ●	100W Input: 220-240Vac, Output: 48Vdc	
		9010319 ●	200W Input: 220-240Vac, Output: 48Vdc	

Breda Flexible Compact Design

UPSIDE LIGHT LED


TRACKS & ACCESSORIES

	CODE	DESCRIPTION	DIMENSIONS (cm)
	9010180 ●	D 90cm Driver 100W 220-240V 30W, 3080Lm, 3000K, Indirect Light, Each Canopy 1xPower Supply	
	9010181 ●	D 120cm Driver 100W 220-240V 40W, 3227Lm, 3000K, Indirect Light, Each Canopy 1xPower Supply	
	9010182 ●	D 150cm Driver 100W 220-240V 50W, 4042Lm, 3000K, Indirect Light, Each Canopy 1xPower Supply	



CHEAT SHEET FOR CONNECTORS

S: SURFACE
R: RECESSED

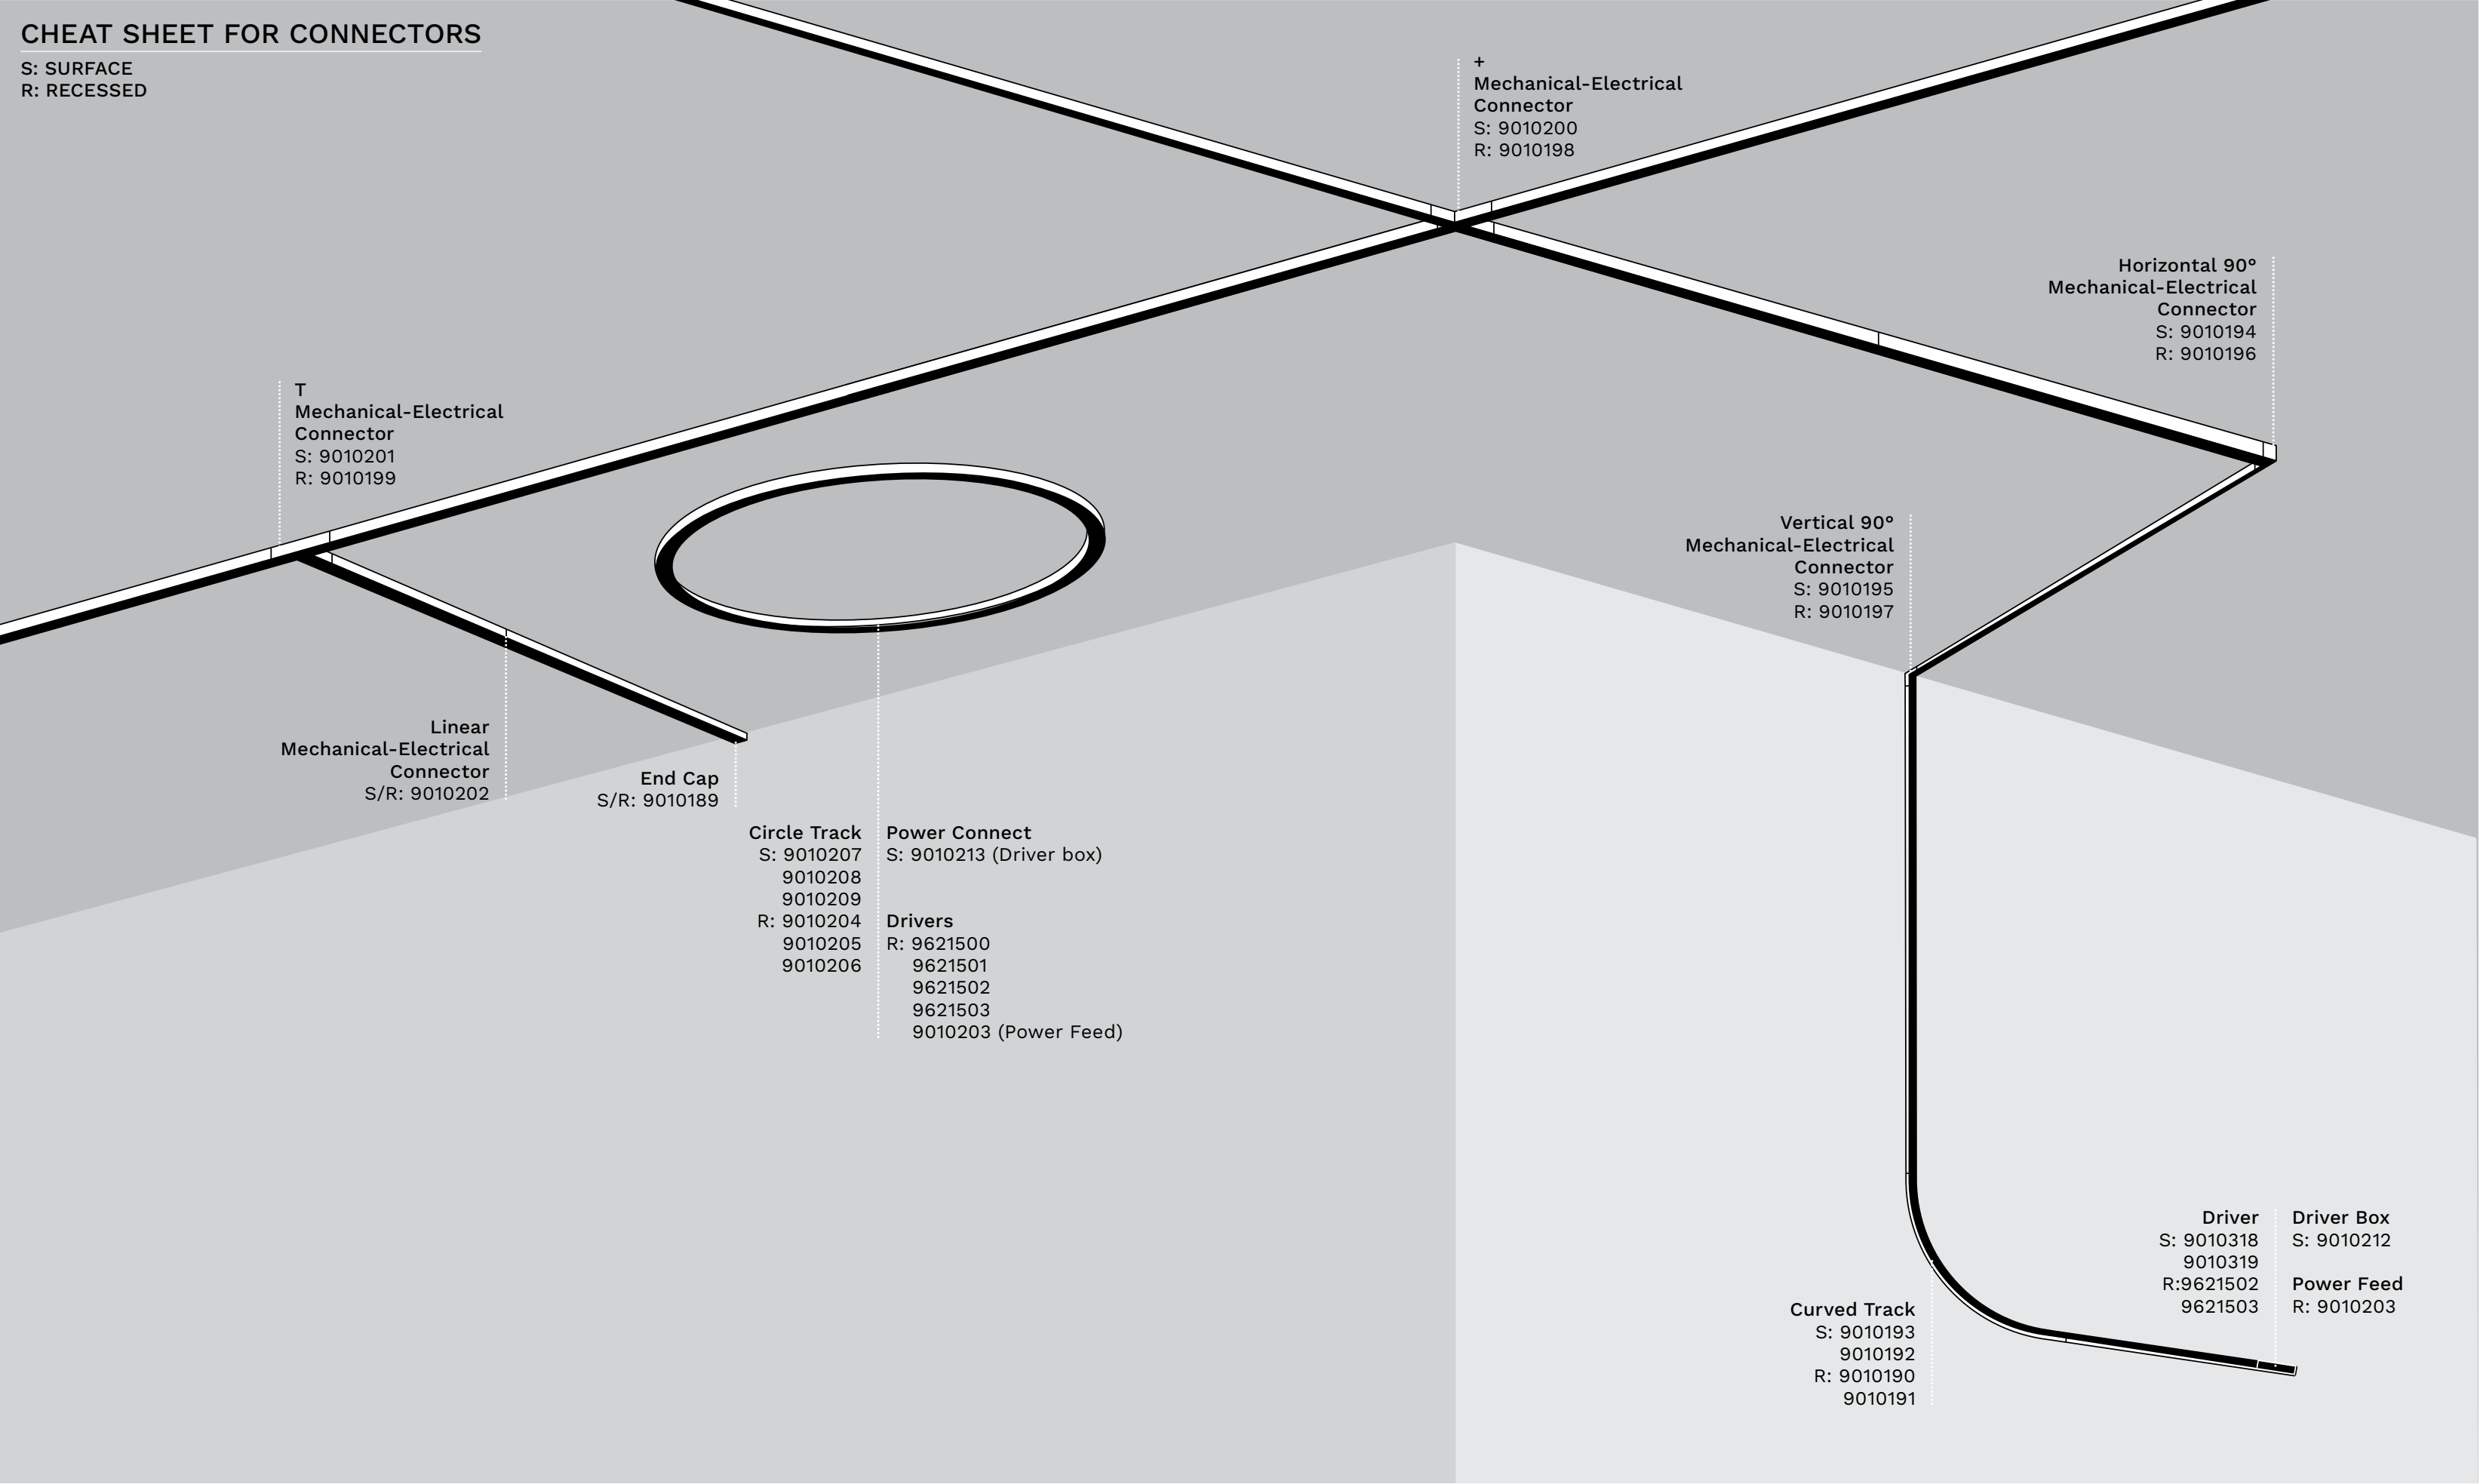




Lighting Modules

Non-Flexible





• Non-Flexible




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010238	● 6W	3000K	200Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010239	● 6W	4000K	200Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010249	● 6W	4000K	200Lm	L 22.1 W 2.2 H 5.1	48Vdc	Dali
9010240	● 15W	3000K	566Lm	L 50 W 2.2 H 5.1	48Vdc	On/Off
9010250	● 15W	3000K	566Lm	L 50 W 2.2 H 5.1	48Vdc	Dali
9010241	● 15W	4000K	566Lm	L 50 W 2.2 H 5.1	48Vdc	On/Off









• Non-Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010236	● 10W	3000K	543Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010248	● 10W	3000K	543Lm	L 22.1 W 2.2 H 5.1	48Vdc	Dali
9010237	● 10W	4000K	543Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off









• Non-Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010247	● 15W	3000K	434Lm	L 24.5 W 2.2 H 14.5	48Vdc	On/Off
9010254	● 15W	3000K	434Lm	L 24.5 W 2.2 H 14.5	48Vdc	Dali









• Non-Flexible




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010246	● 15W	3000K	737Lm	L 24.5 W 2.2 H 14.5	48Vdc	On/Off
9010253	● 15W	3000K	737Lm	L 24.5 W 2.2 H 14.5	48Vdc	Dali









• Non-Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010242	● 6W	3000K	180Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010251	● 6W	3000K	180Lm	L 22.1 W 2.2 H 5.1	48Vdc	Dali
9010243	● 6W	4000K	180Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010244	● 15W	3000K	500Lm	L 50 W 2.2 H 5.1	48Vdc	On/Off
9010252	● 15W	3000K	500Lm	L 50 W 2.2 H 5.1	48Vdc	Dali
9010245	● 15W	4000K	500Lm	L 50 W 2.2 H 5.1	48Vdc	On/Off









Lighting Modules Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010168	10W	3000K	600Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010160	10W	3000K	600Lm	L 22.1 W 2.2 H 5.1	48Vdc	Dali
9010169	10W	4000K	600Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010170	10W	3000K	423Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010161	10W	3000K	423Lm	L 22.1 W 2.2 H 5.1	48Vdc	Dali
9010171	10W	4000K	423Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010176	10W	3000K	482Lm	L 50 W 2.2 H 5.1	48Vdc	On/Off
9010164	10W	3000K	482Lm	L 50 W 2.2 H 5.1	48Vdc	Dali
9010178	10W	4000K	482Lm	L 50 W 2.2 H 5.1	48Vdc	On/Off
9010177	20W	3000K	1005Lm	L 100 W 2.2 H 5.5	48Vdc	On/Off
9010165	20W	3000K	1005Lm	L 100 W 2.2 H 5.5	48Vdc	Dali
9010179	20W	4000K	1005Lm	L 100 W 2.2 H 5.5	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010172	5W	3000K	283Lm	L 4.5 W 22.1 H 13.2	48Vdc	On/Off
9010162	5W	3000K	283Lm	L 4.5 W 22.1 H 13.2	48Vdc	Dali
9010173	5W	4000K	283Lm	L 4.5 W 22.1 H 13.2	48Vdc	On/Off
9010100	5W	3000K	283Lm	L 4.5 W 22.1 H 13.2	48Vdc	On/Off
9010174	10W	3000K	620Lm	L 5.5 W 22.1 H 13.2	48Vdc	On/Off
9010163	10W	3000K	620Lm	L 5.5 W 22.1 H 13.2	48Vdc	Dali
9010175	10W	4000K	620Lm	L 5.5 W 22.1 H 13.2	48Vdc	On/Off
9010101	10W	3000K	620Lm	L 5.5 W 22.1 H 13.2	48Vdc	On/Off
9010102	10W	4000K	620Lm	L 5.5 W 22.1 H 13.2	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010107	10W	3000K	650Lm	D 5.5 H 5.5	48Vdc	On/Off
9010108	15W	3000K	990Lm	D 6.5 H 7	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136199	5W	3000K	175Lm	L 10.4 W 2.2 H1 15.4 H2 34	48Vdc	On/Off




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136198	6W	3000K	277Lm	L 10.4 W 2.2 H 31.5	48Vdc	On/Off






Lighting Modules Flexible



• Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136201	24W	3000K	1165Lm	L 106 W 2.2 H ₁ 5.4 H ₂ 116	48Vdc	On/Off



• Flexible




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136195	5W	3000K	200Lm	D 5 H 100	48Vdc	On/Off




• Flexible




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136196	5W	3000K	230Lm	D 4.5 H 60	48Vdc	On/Off



• Flexible




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136197	5W	3000K	138Lm	D 1.5 H 150	48Vdc	On/Off



• Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136200	24W	3000K	1800Lm	L 106 W 2.2 H ₁ 5.4 H ₂ 116	48Vdc	On/Off






Buxton PRO
24V ON/OFF
48V TRIAC

Buxton is our **original magnetic track system**, trusted for its **reliability and flexibility** over time. Available in **48V Triac dimmable** and **24V On/Off** versions, it offers a robust foundation for a wide range of lighting applications. With a **variety of corners and curved sections**, Buxton allows for creative layouts and seamless transitions. It supports a **large selection of linear lights and spotlights**, making it a versatile solution for both residential and commercial spaces seeking a proven, adaptable magnetic track system.

Buxton


SURFACE MOUNTED ACCESSORIES USAGE

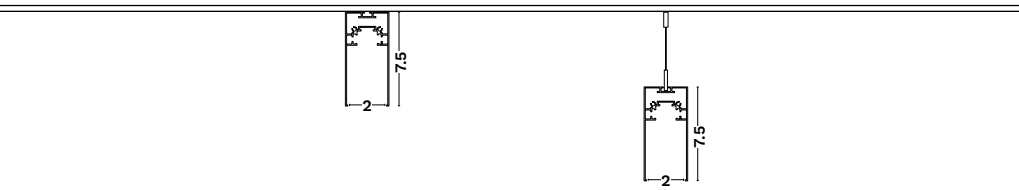


TRACKS & ACCESSORIES

		CODE	DESCRIPTION	DIMENSIONS (cm)
CURVE TRACKS	LINEAR TRACKS	8252001	1m Track (max 300W)	100 7.5
	CURVE TRACKS	9112690	Curve Track 90° R 120	4.1 3.8 7.5 90° R:120
		9112672	Curve Track 72° R 115	4.1 3.8 7.5 72° R:115
CONNECTORS	ELECTRICAL CONNECTORS	9912620	Electrical Connector for 9112690 & 9112672	11 2 2.5 1.7
		8252015	Mechanical-Electrical Connector for 8252001	4.2 10 2.1
		9252015	Power Connector for All	2.5 11 1.6
	T CONNECTORS	9912600	Track Connector For Curved Track (9112690 & 9112672)	3.8 8 2.2
		9070126	T Connector for 8252001	7.5 54.1 29
		9070127	X Connector for 8252001	7.5 54.1 29
	Q CONNECTORS	8252011	Q Connector for 8252001	30 30 3.9 7.5
		8252014	V Connector for 8252001	10 10 3.9 10 7.5
		8252035	Corner 2V Connector 120°	120° 3.9 14.5
	TUBE CONNECTORS	9912611	Connector Tube for 8252001	37.3 37.3
		9912601	Tube With Power Connector for 8252001	2.3 37.3 2.3
		9912612	Connector Tube for 8252001	70 70
	TUBE WITH POWER CONNECTOR	9912602	Tube With Power Connector for 8252001	2.3 70 2.3
		8252003	End Cap for 8252001	0.2 3.9 7.5 0.3
		9912603	End Cap For Curved Track (9112690 & 9112672)	4.1 7.5 0.5
OTHER ACCESSORIES	COVERS	9012677	Cutable PVC Cover 1m	100
		8252016	Screws For Ceiling	
		8252017	Set Of Accessories	
DRIVERS	DRIVERS	9010316	Track Driver 100 Watt	25 4.2 2.2
		9010317	Track Driver 200 Watt	30.5 4.2 2.2
		8252037	Fedder Power Included Driver 120 Watt	40 7.5
		8252038	Driver Box	40 7.5


Surface or Pendant Magnetic Track
8252034



Circular Magnetic Profiles




8925201
D: 90
Driver 75W
220-240Vac
Included



8925202
D: 120
Driver 75W
220-240Vac
Included

Rectangular Magnetic Profile
8925204



8925204
Driver 100W
220-240Vac Included


Buxton

RECESS APPLICATION



TRACKS & ACCESSORIES

		CODE	DESCRIPTION	DIMENSIONS (cm)
CURVE TRACKS		8252002	1m Track (max 300W) Cut-Out 4.25 cm	
		9212690	Curve Track 90° R 120	
		9212672	Curve Track 72° R 115	
CONNECTORS		9912620	Electrical Connector for 9112690 & 9112672	
		9912605	Mechanical Connector	
		9252015	Power Connector	
		8252013	Q Connector	
		8252012	V Connector	
		8252003	End Cap for 8252002	
OTHER ACCESSORIES		9912610	End Cap For Curved Track (9212690 & 9212672)	
		9012677	Cutable PVC Cover 1m	
		8252016	Screws For Ceiling	

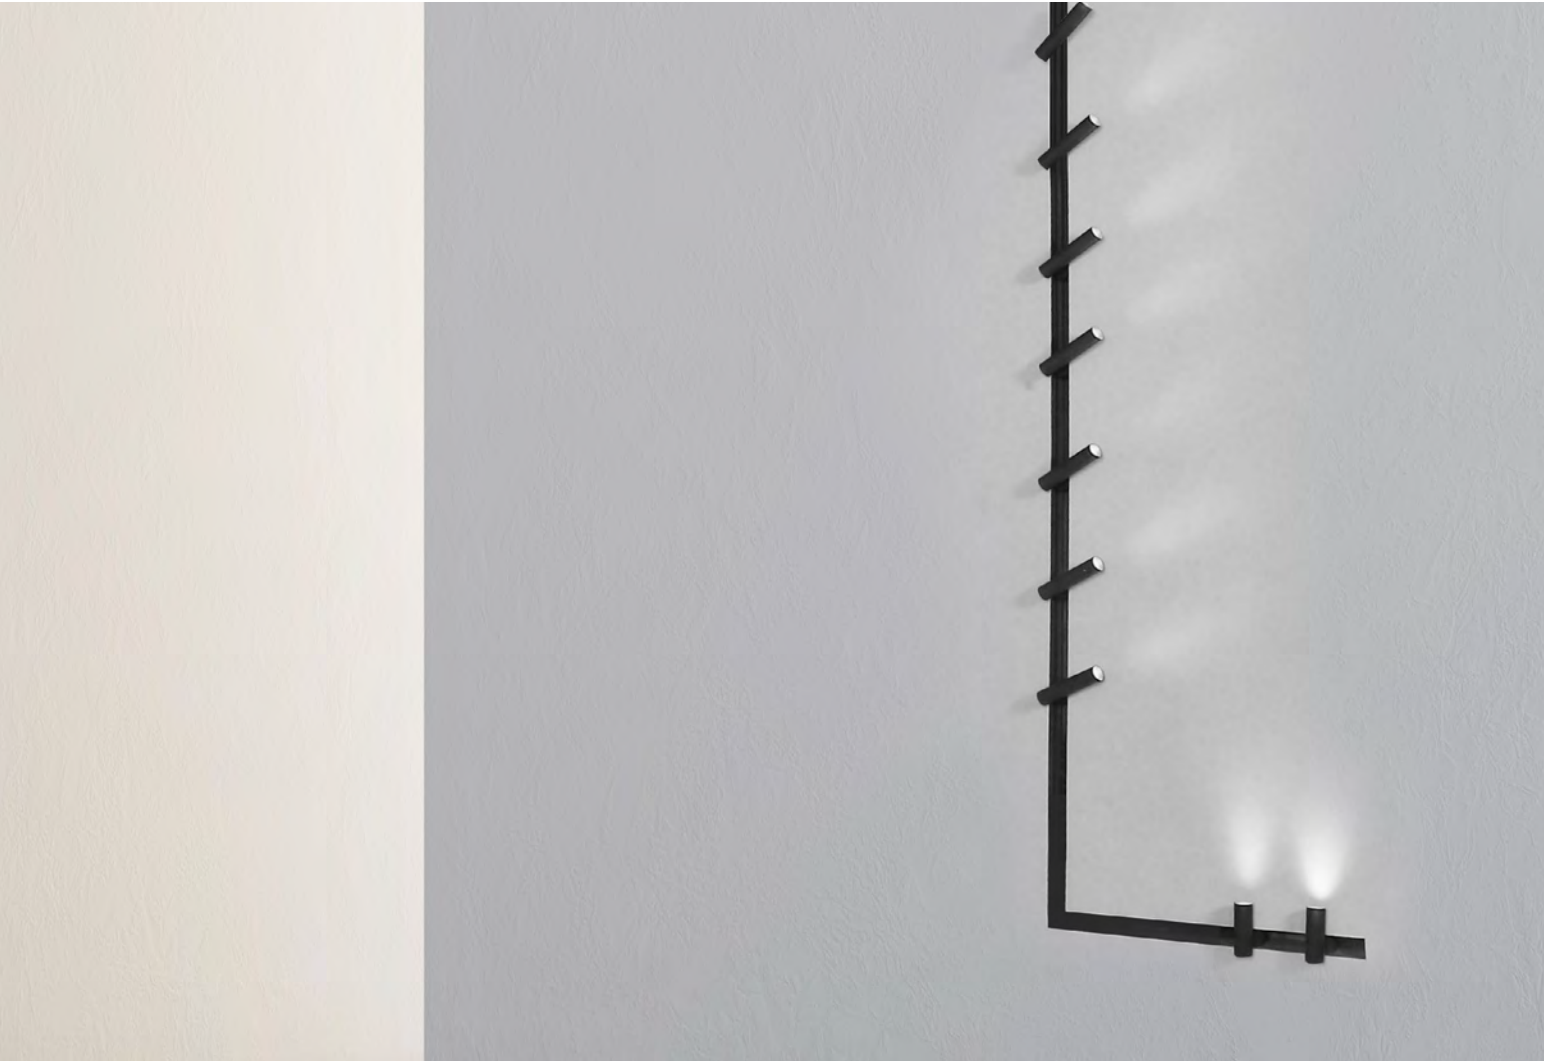

Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP20	8252019	60 Watt, 220-240VAC, 24VDC 2.5A,	
	8252020	120 Watt, 220-240VAC, 24VDC	
	8252021	180 Watt, 220-240VAC, 24VDC	
IP67	9621508	75 Watt, 100-240VAC, 24VDC 1A	L 14 W 6.3 H 3.2
	9621509	100 Watt, 100-240VAC, 24VDC 1.1A	L 14 W 6.3 H 3.2
	9621510	150 Watt, 100-240VAC, 24VDC 2A	L 18 W 6.3 H 3.55
	9621511	200 Watt, 100-240VAC, 24VDC 2.4A	L 19.9 W 6.3 H 3.55

Remote Drivers for Triac Application			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP67	9621504	75 Watt, 100-240VAC, 48VDC 1A	L 14 W 6.3 H 3.2
	9621505	100 Watt, 100-240VAC, 48VDC 1.1A	L 14 W 6.3 H 3.2
	9621506	150 Watt, 100-240VAC, 48VDC 2A	L 18 W 6.3 H 3.55
	9621507	200 Watt, 100-240VAC, 48VDC 2.4A	L 19.9 W 6.3 H 3.55







Controllers		
	CODE	DESCRIPTION
	9136151	Triac Controller 288W

Buxton L

SURFACE MOUNTED ACCESSORIES USAGE





TRACKS & ACCESSORIES





		CODE		DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9252001	●	1m Track (max 300W)	
		9252002	●	2m Track (max 300W)	
CONNECTORS		9236106	●	Electrical Connector	
		9252003	●	Q Connector	
		9252004	●	V Connector	
		9252010	●	Mechanical Connector	
OTHER ACCESSORIES		9252012	●	End Cap	
		8252040	●	Set Of Accessories	
DRIVERS		9010316	●	On/Off 100 Watt Track Driver	
		9010317	●	On/Off 200 Watt Track Driver	

Buxton L

RECESS APPLICATION

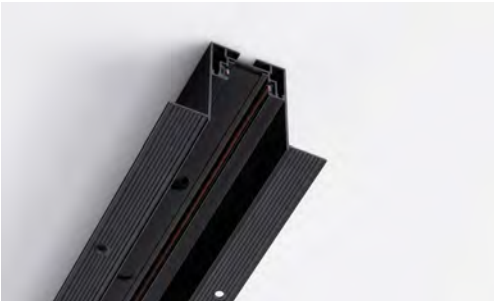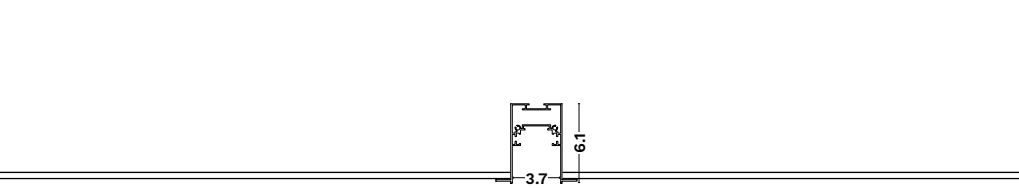

TRACKS & ACCESSORIES

		CODE		DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9252005	●	1m Track (max 300W) Cut-Out 4.15 cm	
		9252006	●	2m Track (max 300W) Cut-Out 4.15 cm	
CONNECTORS		9236106	●	Electrical Connector	
		9252011	●	Power Connector	
		9252007	●	Q Connector	
		9252008	●	V Connector	
		9252010	●	Mechanical Connector	
		9252012	●	End Cap	


Remote Drivers	
CODE	DESCRIPTION
8252019	60 Watt, 220-240VAC, 24VDC 2.5A,
8252020	120 Watt, 220-240VAC, 24VDC
8252021	180 Watt, 220-240VAC, 24VDC

Remote Drivers for Triac Application			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP67	9621504	75 Watt, 100-240VAC, 48VDC 1A	L 18 W 6.3 H 3.55
	9621505	100 Watt, 100-240VAC, 48VDC 1.1A	L 18 W 6.3 H 3.55
	9621506	150 Watt, 100-240VAC, 48VDC 2A	L 21.9 W 6.3 H 3.55
	9621507	200 Watt, 100-240VAC, 48VDC 2.4A	L 24.4 W 7.1 H 3.75

Controllers		
	CODE	DESCRIPTION
	9136151	Triac Controller 288W

CHEAT SHEET FOR CONNECTORS

S: SURFACE
R: RECESSED

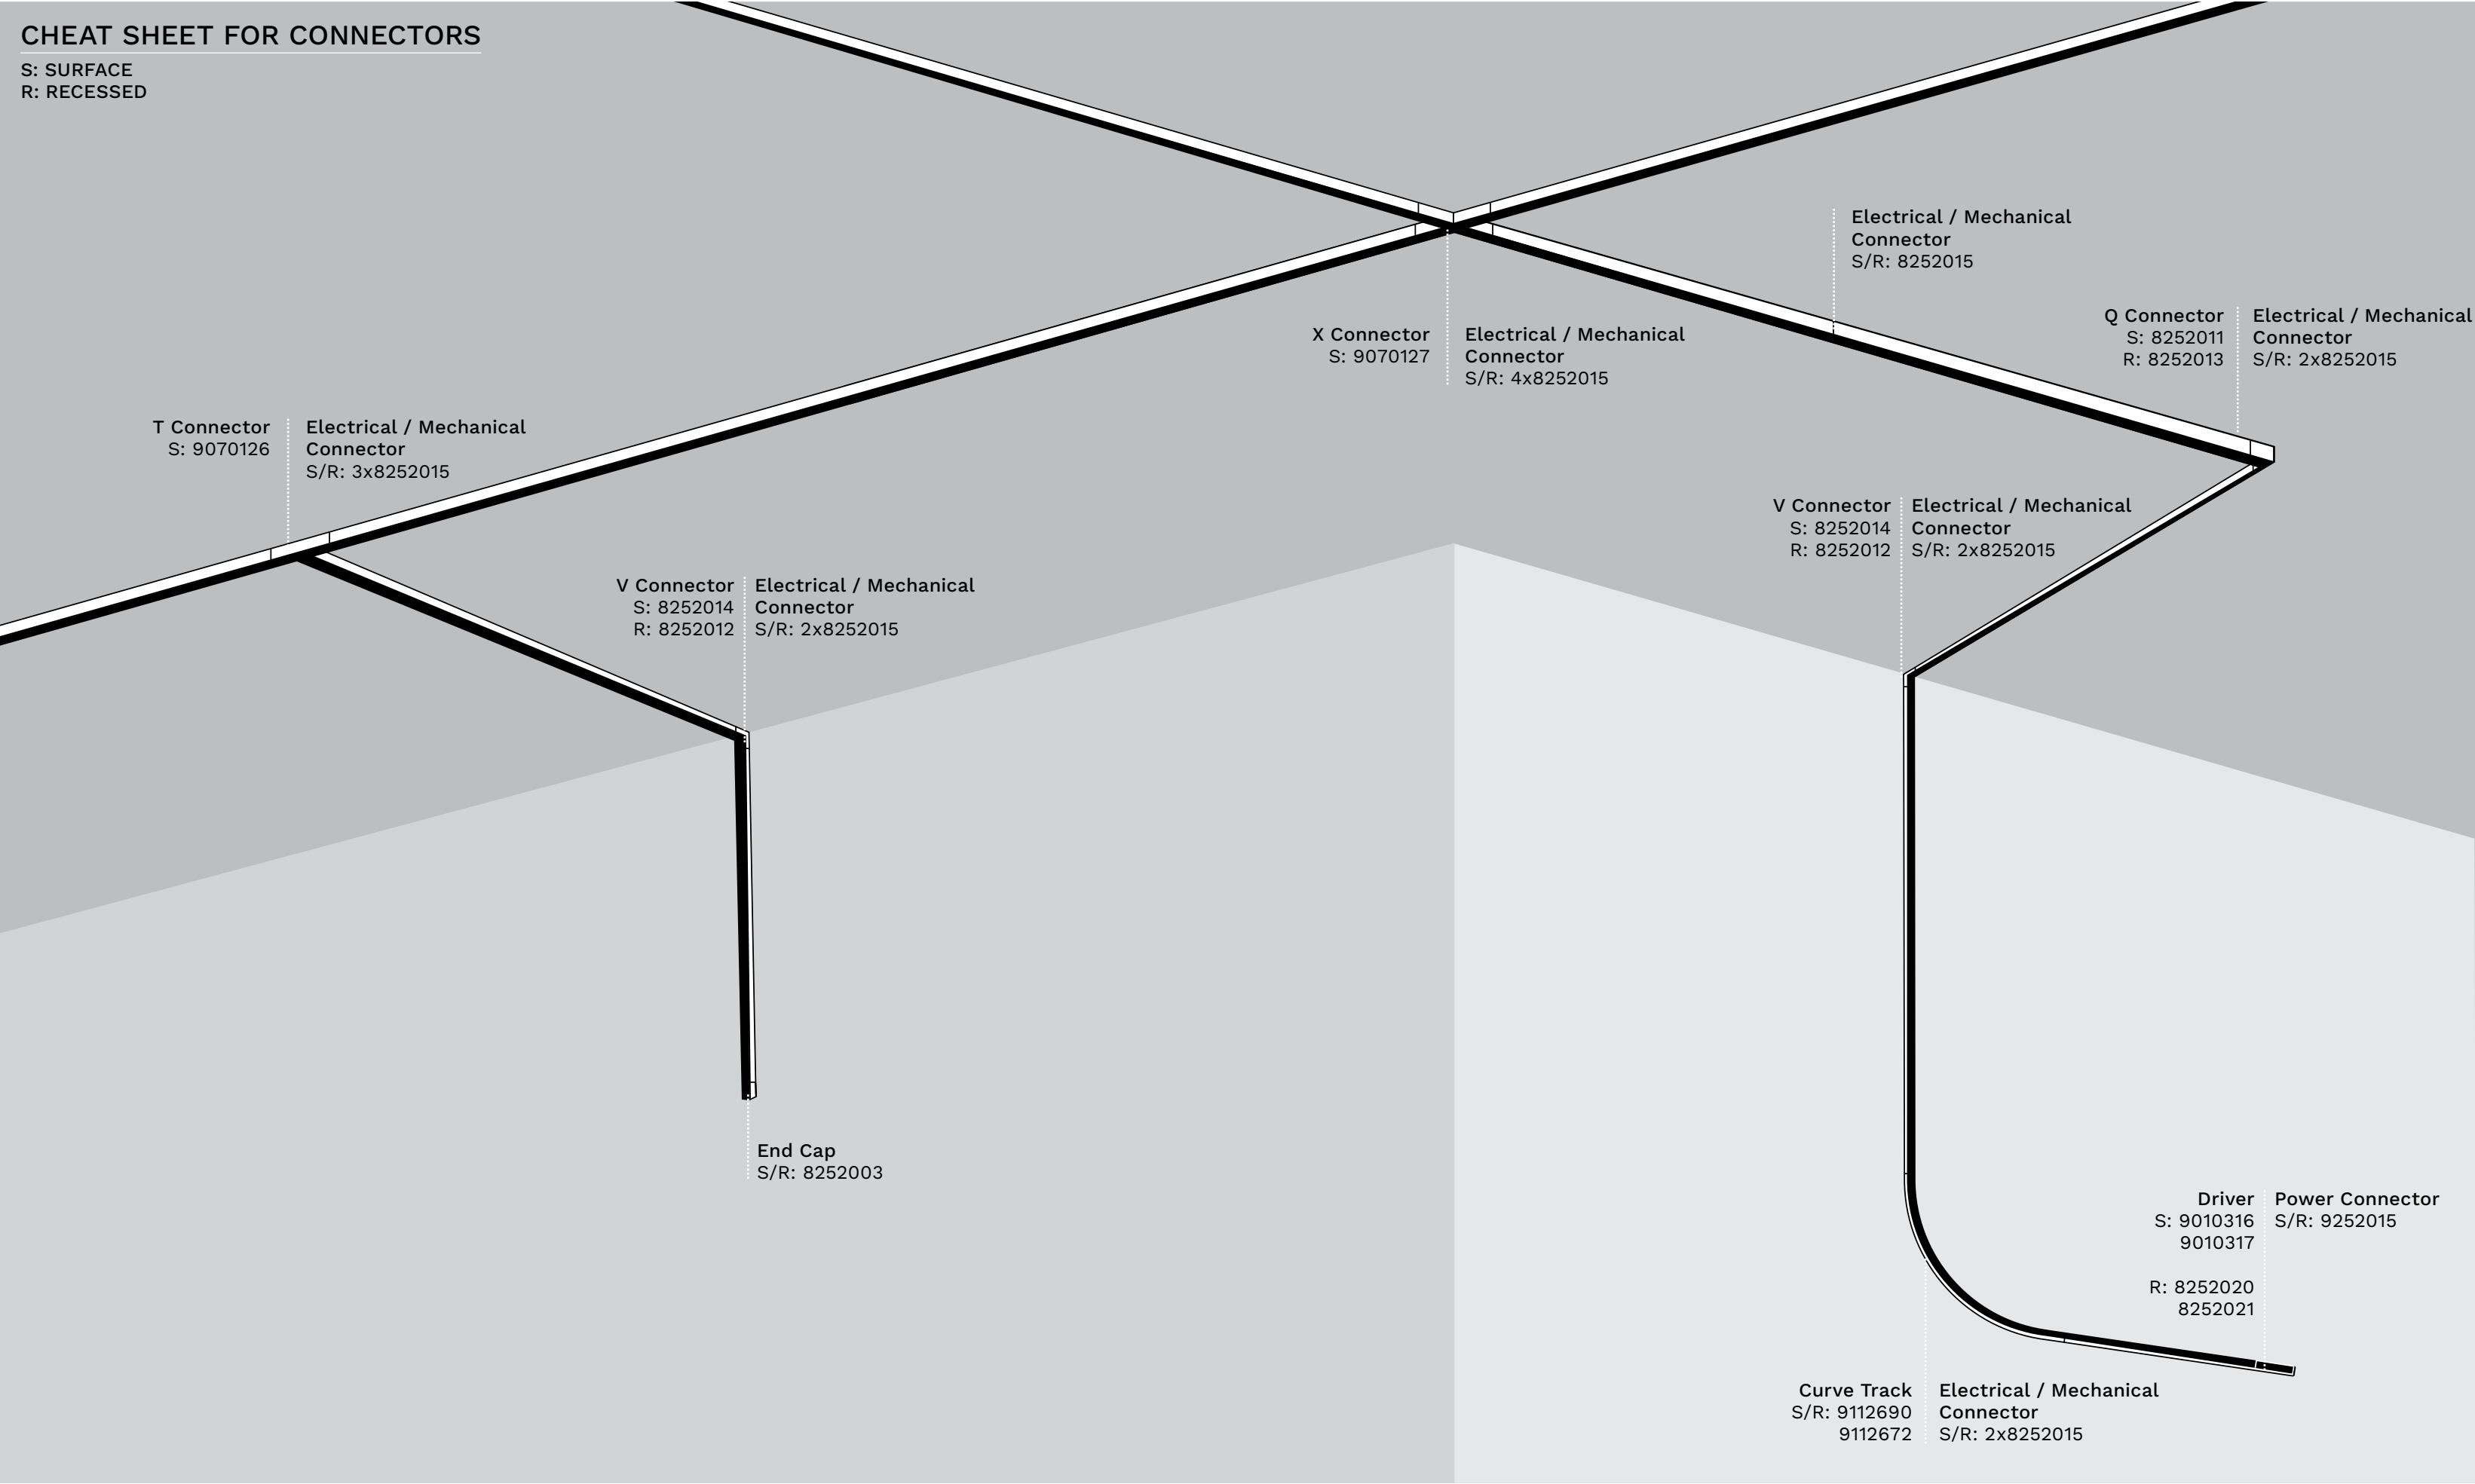



Lighting Modules



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8254418	15W	3000K	440Lm	L 27.4 W 3.4 H 11.6	24Vdc	On/Off
9136158	15W	3000K	600Lm	L 27.4 W 3.4 H 11.6	48Vdc	Triac
8254414	15W	4000K	479Lm	L 27.4 W 3.4 H 11.6	24Vdc	On/Off
8254419	22W	3000K	659Lm	L 40.7 W 3.4 H 11.6	24Vdc	On/Off
9136159	22W	3000K	800Lm	L 40.7 W 3.4 H 11.6	48Vdc	Triac
8254415	22W	4000K	727Lm	L 40.7 W 3.4 H 11.6	24Vdc	On/Off

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8254416	15W	3000K	371Lm	L 26.9 W 3.5 H 5.1	24Vdc	On/Off
9136156	15W	3000K	520Lm	L 26.9 W 3.5 H 5.1	48Vdc	Triac
8254412	15W	4000K	448Lm	L 26.9 W 3.5 H 5.1	24Vdc	On/Off
8254417	22W	3000K	557Lm	L 40.2 W 3.5 H 5.1	24Vdc	On/Off
9136157	22W	3000K	800Lm	L 40.2 W 3.4 H 5.1	48Vdc	Triac
8254413	22W	4000K	727Lm	L 40.2 W 3.5 H 5.1	24Vdc	On/Off
9060960	28W	3000K	1179Lm	L 80 W 3.5 H 5	24Vdc	On/Off
9136167	28W	3000K	1179Lm	L 80 W 3.5 H 5	48Vdc	Triac
9060970	28W	4000K	1179Lm	L 80 W 3.5 H 5	24Vdc	On/Off

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8252025	15W	3000K	900Lm	L 26.9 W 3.5 H 5.1	24Vdc	On/Off
9136152	15W	3000K	1200Lm	L 26.9 W 3.5 H 5.1	48Vdc	Triac
8252004	15W	4000K	1080Lm	L 26.9 W 3.5 H 5.1	24Vdc	On/Off
8252026	22W	3000K	1480Lm	L 40.2 W 3.5 H 5.1	24Vdc	On/Off
9136153	22W	3000K	1650Lm	L 40.2 W 3.5 H 5.1	48Vdc	Triac
8252005	22W	4000K	1520Lm	L 40.2 W 3.5 H 5.1	24Vdc	On/Off

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8252027	15W	3000K	1220Lm	L 27.4 W 3.4 H 11.6	24Vdc	On/Off
9136154	15W	3000K	1340Lm	L 27.4 W 3.4 H 11.6	48Vdc	Triac
8252006	15W	4000K	1320Lm	L 27.4 W 3.4 H 11.6	24Vdc	On/Off
8252028	22W	3000K	1606Lm	L 40.7 W 3.4 H 11.6	24Vdc	On/Off
9136155	22W	3000K	1780Lm	L 40.7 W 3.4 H 11.6	48Vdc	Triac
8252007	22W	4000K	1630Lm	L 40.7 W 3.4 H 11.6	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9060950	● 5W	3000K	387Lm	D 3 H 10.6	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9070129	● 3W	3000K	35Lm	L 3.6 W 3.6 H 5.1	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136160	● 10W	3000K	535Lm	D 3 L 24.5 H 15.1	48Vdc	Triac
9136161	● 10W	3000K	535Lm	D 3.2 L 24.5 H 19.6	48Vdc	Triac



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9013620	● 20W	3000K	1585Lm	D 6.5 H 21	24Vdc	On/Off
9136164	● 20W	3000K	1650Lm	D 6.5 H 21	48Vdc	Triac
9013720	● 20W	4000K	1617Lm	D 6.5 H 21	24Vdc	On/Off




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9060980	● 10W	3000K	538Lm	D 3.2 L 24.5 H 15.1	24Vdc	On/Off
9136168	● 10W	3000K	576Lm	D 3.2 L 24.5 H 15.1	48Vdc	Triac
9060990	● 10W	4000K	542Lm	D 3.2 L 24.5 H 15.1	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8252039	● 5W	3000K	330Lm	D 3 H 16	24Vdc	On/Off
8252008	● 5W	4000K	370Lm	D 3 H 16	24Vdc	On/Off
8925216	● 8W	3000K	580Lm	D 3 H 19	24Vdc	On/Off
8925220	● 10W	3000K	680Lm	D 3 H 19	24Vdc	On/Off
9012673	● 10W	3000K	680Lm	D 3 H 19	24Vdc	On/Off
8252029	● 12W	3000K	816Lm	D 3 H 19	24Vdc	On/Off
8252009	● 12W	4000K	855Lm	D 3 H 19	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8252039	● 5W	3000K	330Lm	D 3 H 16	24Vdc	On/Off
8252008	● 5W	4000K	370Lm	D 3 H 16	24Vdc	On/Off
8925216	● 8W	3000K	580Lm	D 3 H 19	24Vdc	On/Off
8925220	● 10W	3000K	680Lm	D 3 H 19	24Vdc	On/Off
9012673	● 10W	3000K	680Lm	D 3 H 19	24Vdc	On/Off
8252029	● 12W	3000K	816Lm	D 3 H 19	24Vdc	On/Off
8252009	● 12W	4000K	855Lm	D 3 H 19	24Vdc	On/Off

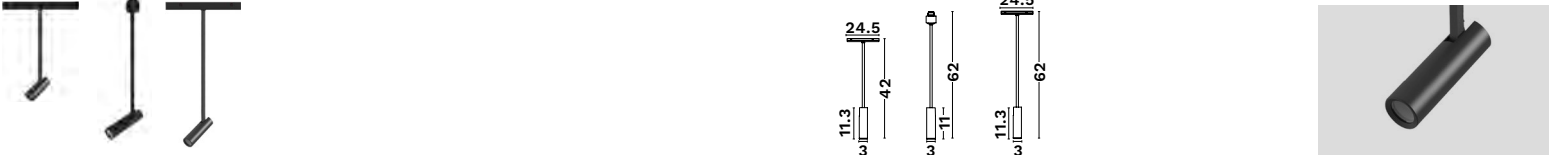

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136165	● 10W	3000K	535Lm	D 3 H 42	48Vdc	Triac
8252032	● 10W	3000K	680Lm	D 3 H 62	24Vdc	On/Off
9136166	● 10W	3000K	535Lm	D 3 H 62	48Vdc	Triac





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9070130	3W	3000K	32Lm	L 3.6 W 5.7 H 10.5	24Vdc	On/Off




*Compatible with 8925201, 8925202, 8925204, 9112690, 9212690, 9212672, 9112672

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9012674	5W	3000K	220Lm	D 12 H 16.5	24Vdc	On/Off
9012671	5W	3000K	220Lm	D 10 H 15	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8252030	12W	3000K	930Lm	D 3 H 150	24Vdc	On/Off
9136162	12W	3000K	1185Lm	D 3 H 150	48Vdc	Triac
8252010	12W	4000K	950Lm	D 3 H 150	24Vdc	On/Off
9136163	12W	3000K	1185Lm	D 3 H 150	48Vdc	Triac

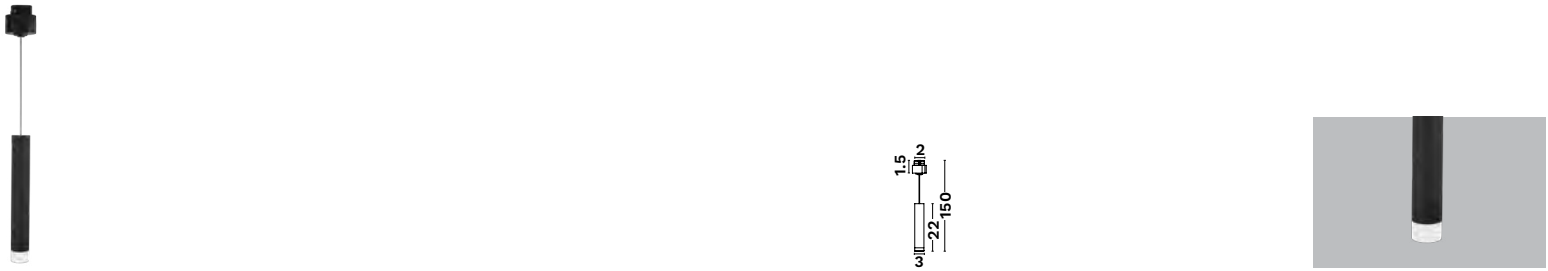


CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9025201	15W	3000K	730Lm	D 3 H 150	24Vdc	On/Off

LIGHTING
SYSTEMS
302---- 365

Pages

Our **lighting systems** offer a **diverse range of options** tailored to different applications—whether it's **colorful, flexible linear tracks** for creative architectural designs, **durable systems** for high-performance environments, or **recessed downlights with replaceable modules** for long-term flexibility and easy maintenance. Designed to provide **unlimited combinations** and **versatile lighting solutions**, our portfolio ensures the right fit for any residential, commercial, or specialty project.

UPRAIL	Page 304-313
CHROMA	Page 314-323
SYMMETRIC	Page 324-335
GLOW	Page 336-345
IMAGINE	Page 346-357
IMAGINE 2	Page 358-365

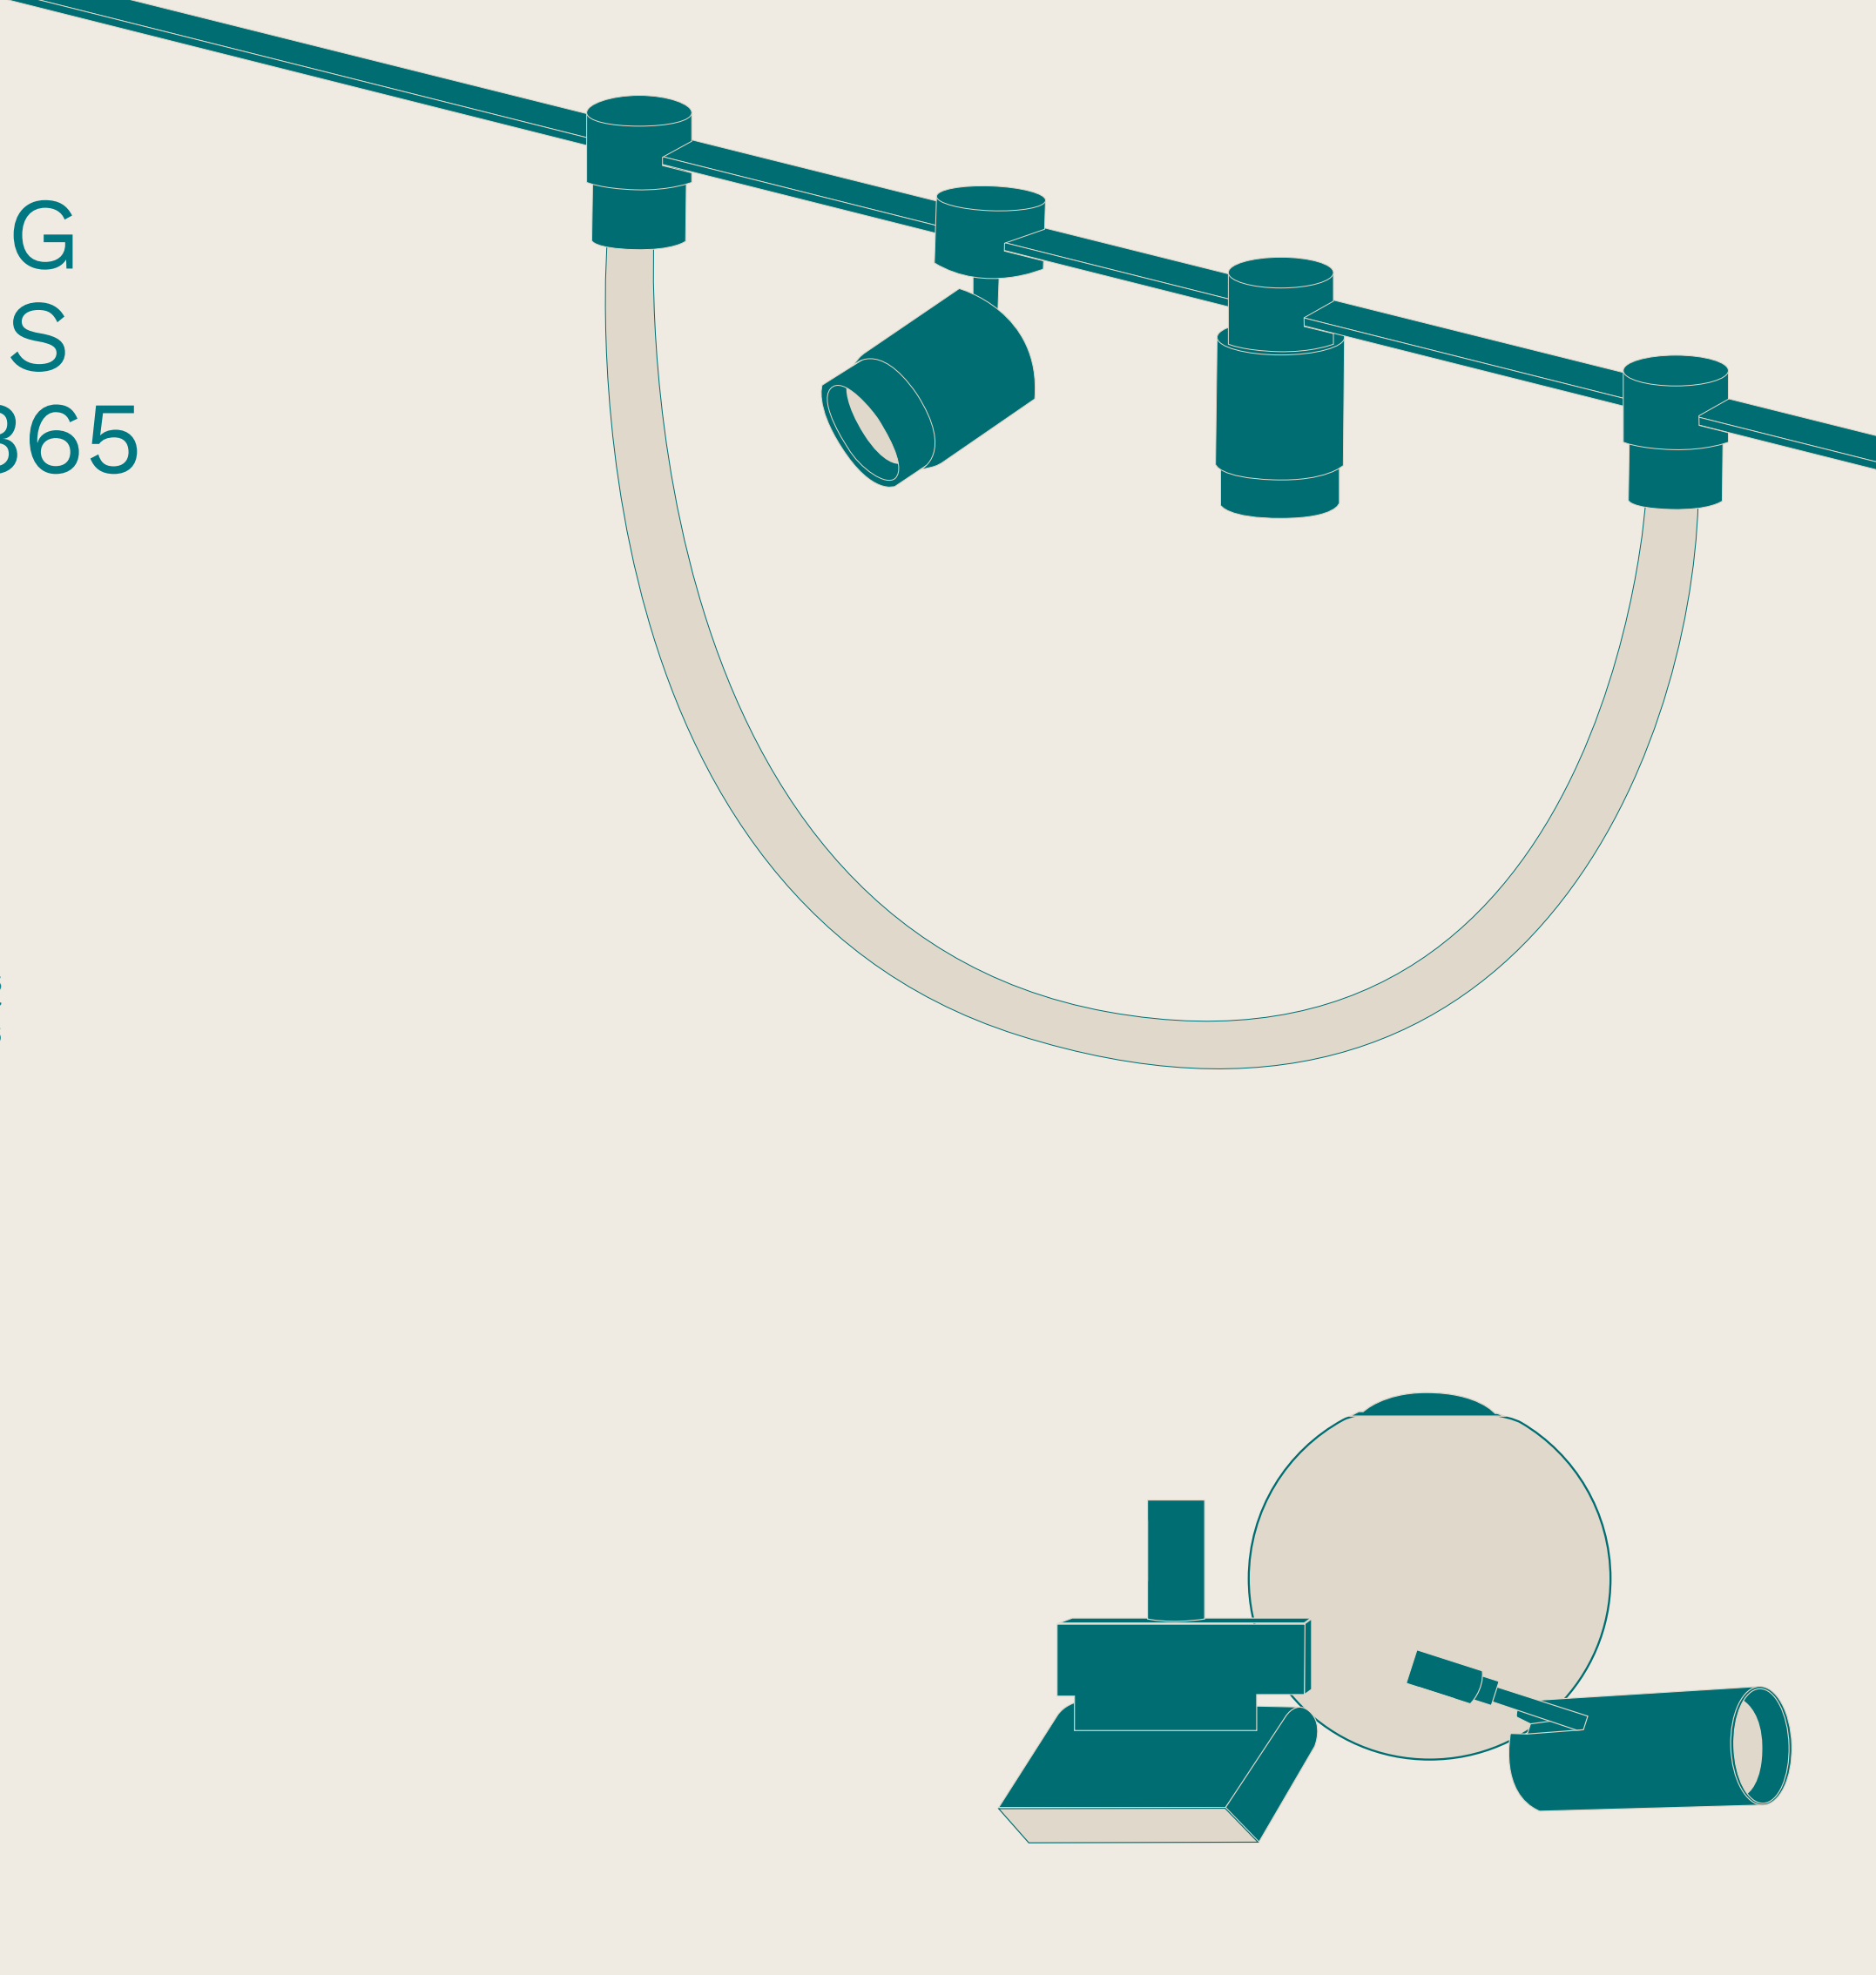



UPRAIL

24V TRIAC











UpRail is a sleek **24V DC Triac dimmable lighting system** designed to run **wall-to-wall up to 10 meters** without the need for **suspended wires or visible mounting hardware**. It offers clean architectural integration with a focus on **minimalist design**. Ideal for creating continuous lines of **indirect light**, UpRail also supports a variety of **spotlights** and **suspended lighting modules**, providing both ambient and task lighting in a seamless, modern form. Perfect for residential and commercial interiors where clean lines and performance are essential.

UpRail

SURFACE APPLICATION





TRACKS & ACCESSORIES



	CODE	TYPE	DESCRIPTION	DIMENSIONS (cm)
TRACKS	9009041	2 m	Surface UpRail Systems Sandy Black Indirect Light 20W 3000K Beam Angle 120°	
	9009042	3 m	Surface UpRail Systems Sandy Black Indirect Light 30W 3000K Beam Angle 120°	
	9009043	4 m	Surface UpRail Systems Sandy Black Indirect Light 40W 3000K Beam Angle 120°	
	9009044	5 m	Surface UpRail Systems Sandy Black Indirect Light 50W 3000K Beam Angle 120°	
	9009045	10 m	Surface UpRail Systems Sandy Black Indirect Light 100W 3000K Beam Angle 120°	
POWER FEED	9009069		Power Feed	
	9009070		Central Connector Track to Track	
DRIVERS	9009072		Power Supply Box 180W	
	9009073		Power Supply Box with Triac Controller 180W	
	9009074		Power Supply Box 250W	
	9009075		Power Supply Box with Triac Controller 250W	
CONNECTORS	9009065		Small Single Base Sandy black	
	9009066		Large Single Base Sandy black	
	9009067		Small Double Base Sandy black	
	9009068		Large Double Base Sandy black	
OTHER ACCESSORIES	9009064		Led Strip 100W 10m for Indirect	
	9009071		Cutting Tool UpRail	



CHEAT SHEET FOR CONNECTORS

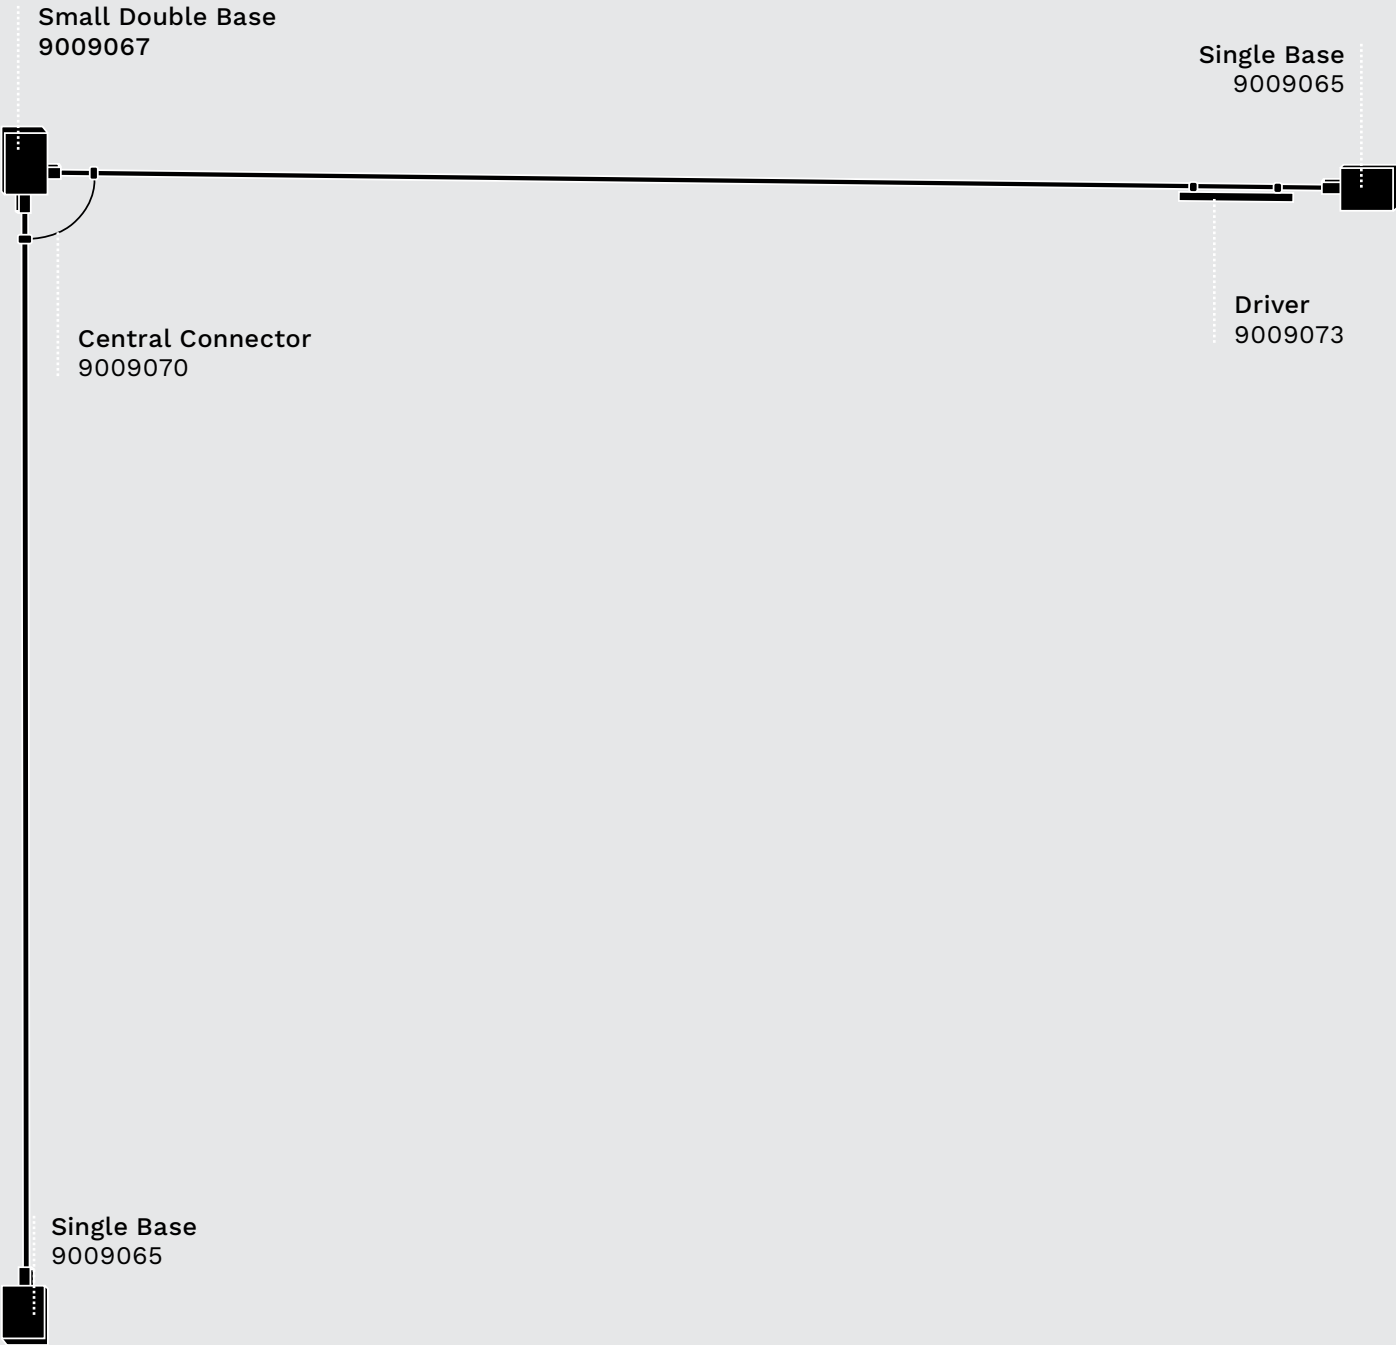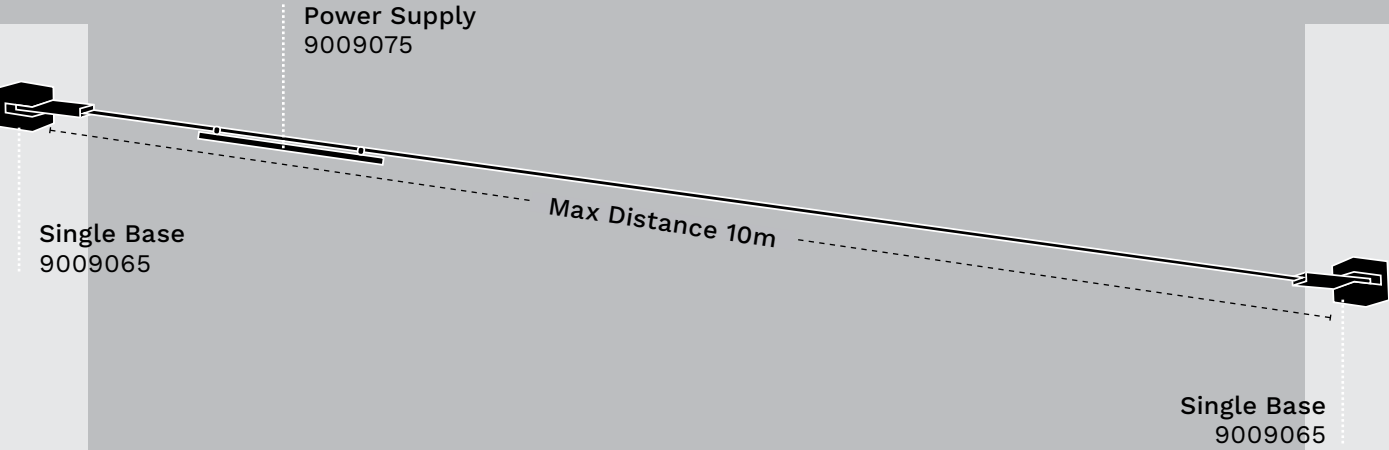

Lighting Modules

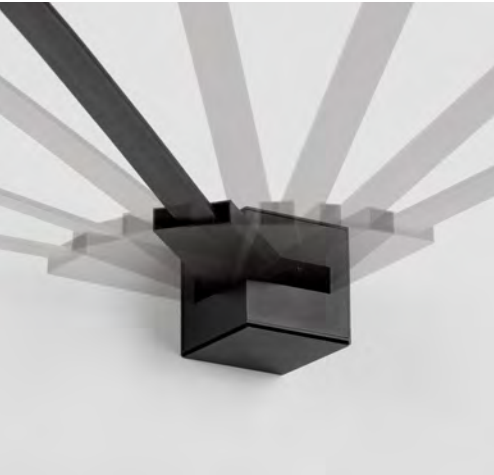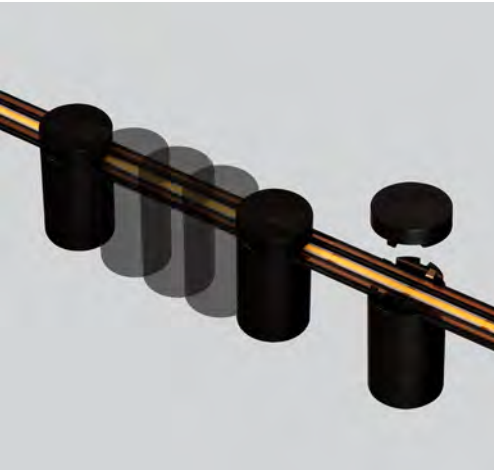

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9009056 ●	8W	3000K	218Lm	L 33 W 2.1 H 7	24Vdc	Triac
9009057 ●	12W	3000K	336Lm	L 54.5 W 2.1 H 7	24Vdc	Triac
9009058 ●	24W	3000K	667Lm	L 108.5 W 2.1 H 7	24Vdc	Triac



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9009060 ●	10W	3000K	374Lm	L 33 W 2.1 H 7	24Vdc	Triac
9009061 ●	15W	3000K	582Lm	L 54.5 W 2.1 H 7	24Vdc	Triac
9009062 ●	30W	3000K	1204Lm	L 108.5 W 2.1 H 7	24Vdc	Triac




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9009048 ●	7W	3000K	447Lm	L 5.5 H 11	24Vdc	Triac




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9009047 ●	7W	3000K	444Lm	L 5.5 H 10.3	24Vdc	Triac




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9009046 ●	7W	3000K	401Lm	L 4.5 H 8.2	24Vdc	Triac






CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9009059	24W	3000K	669Lm	L 108.5 W 4.2 H 120	24Vdc	Triac




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9009063	30W	3000K	1181Lm	L 108.5 W 4.2 H 120	24Vdc	Triac



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9009055	22W	3000K	1301Lm	L 106.4 W 2.3 H 120	24Vdc	Triac



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9009051	15W	3000K	409Lm	L 90 D 1.5 H 150	24Vdc	Triac



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9009053	15W	3000K	797Lm	D 2.3 L 100	24Vdc	Triac
9009054	33W	3000K	2125Lm	D 2.3 L 200	24Vdc	Triac



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9009052	3W	3000K	60Lm	D 1.5 H 123	24Vdc	Triac



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9009049	7W	3000K	403Lm	D 4.5 H 120	24Vdc	Triac



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9009050	5W	3000K-6500K	365Lm	D 8 H 120	24Vdc	Triac



CHROMA
24V


Chroma is a **flexible 24Vdc Triac dimmable track system** designed to adapt to a wide range of architectural needs. Its bendable structure allows for **creative, free-form installations**, while supporting a variety of **lighting modules**, including **bulb-style elements, spotlights, linear fixtures**, and more. With its versatile design and broad compatibility, Chroma enables **unlimited lighting applications**, making it an ideal solution for dynamic residential, retail, and hospitality environments that demand both **form and flexibility**.

Chroma

SURFACE APPLICATION




TRACKS & ACCESSORIES

	CODE	DESCRIPTION	DIMENSIONS (cm)
TRACKS	9680134	15m Flexible Reel IP65 (free cut) Sold per meter	
	9680135	15m Flexible Reel IP65 (free cut) Sold per meter	
	9680136	15m Flexible Reel IP65 (free cut) Sold per meter	
	9680219	15m Flexible Reel IP65 (free cut) Sold per meter	
	9680220	15m Flexible Reel IP65 (free cut) Sold per meter	
	9680221	15m Flexible Reel IP65 (free cut) Sold per meter	
POWER FEED	9680177	Plug Converter Systems 5m for Connection Glow Track	
	9680178	Plug Converter Systems 10m for Connection Glow Track	
CONNECTORS	9680137	Ceilling Mount	
	9680138	Middle Connector	
	9680176	Connector for Connecting Glow Track	
	9680140	Black Silicone End Cap	
OTHER ACCESSORIES	9680139	Transparent Silicone End Cap	
	9680222	Connector between 24Vdc Symmetric to 24Vdc Chroma Series	
	9680141	Driver Box for 100W	
	9680142	Driver Box for 200W	
	9680175	Clump Weight	



Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP20	9680143	100 Watt, 220-240VAC, 24Vdc	L 12.9 W 9.7 H 3
	9680144	150 Watt, 220-240VAC, 24Vdc	L 15.9 W 9.7 H 3
	9680145	200 Watt, 220-240VAC, 24Vdc	L 21.5 W 11.5 H 3
IP67	9840106	75 Watt, 24Vdc	L 13.8 W 6.3 H 3.2
	9840107	100 Watt, 24Vdc	L 15.3 W 6.3 H 3.2
	9840108	150 Watt, 24Vdc	L 18.6 W 6.3 H 3.2
Remote Drivers for Triac			
	CODE	DESCRIPTION	DIMENSIONS (cm)
	9580670	Remote Driver 150W Triac, 24Vdc, without box	L 30 W 8 H 4.2
Controllers			
	CODE	DESCRIPTION	DIMENSIONS (cm)
	9680146	Tuya Controller 240W (no gateway needed)	L 10 W 4.7 H 2.5
	9621581	Casambi Controller 144W (no gateway needed)	L 7.3 W 3 H 1.8

CHEAT SHEET FOR CONNECTORS

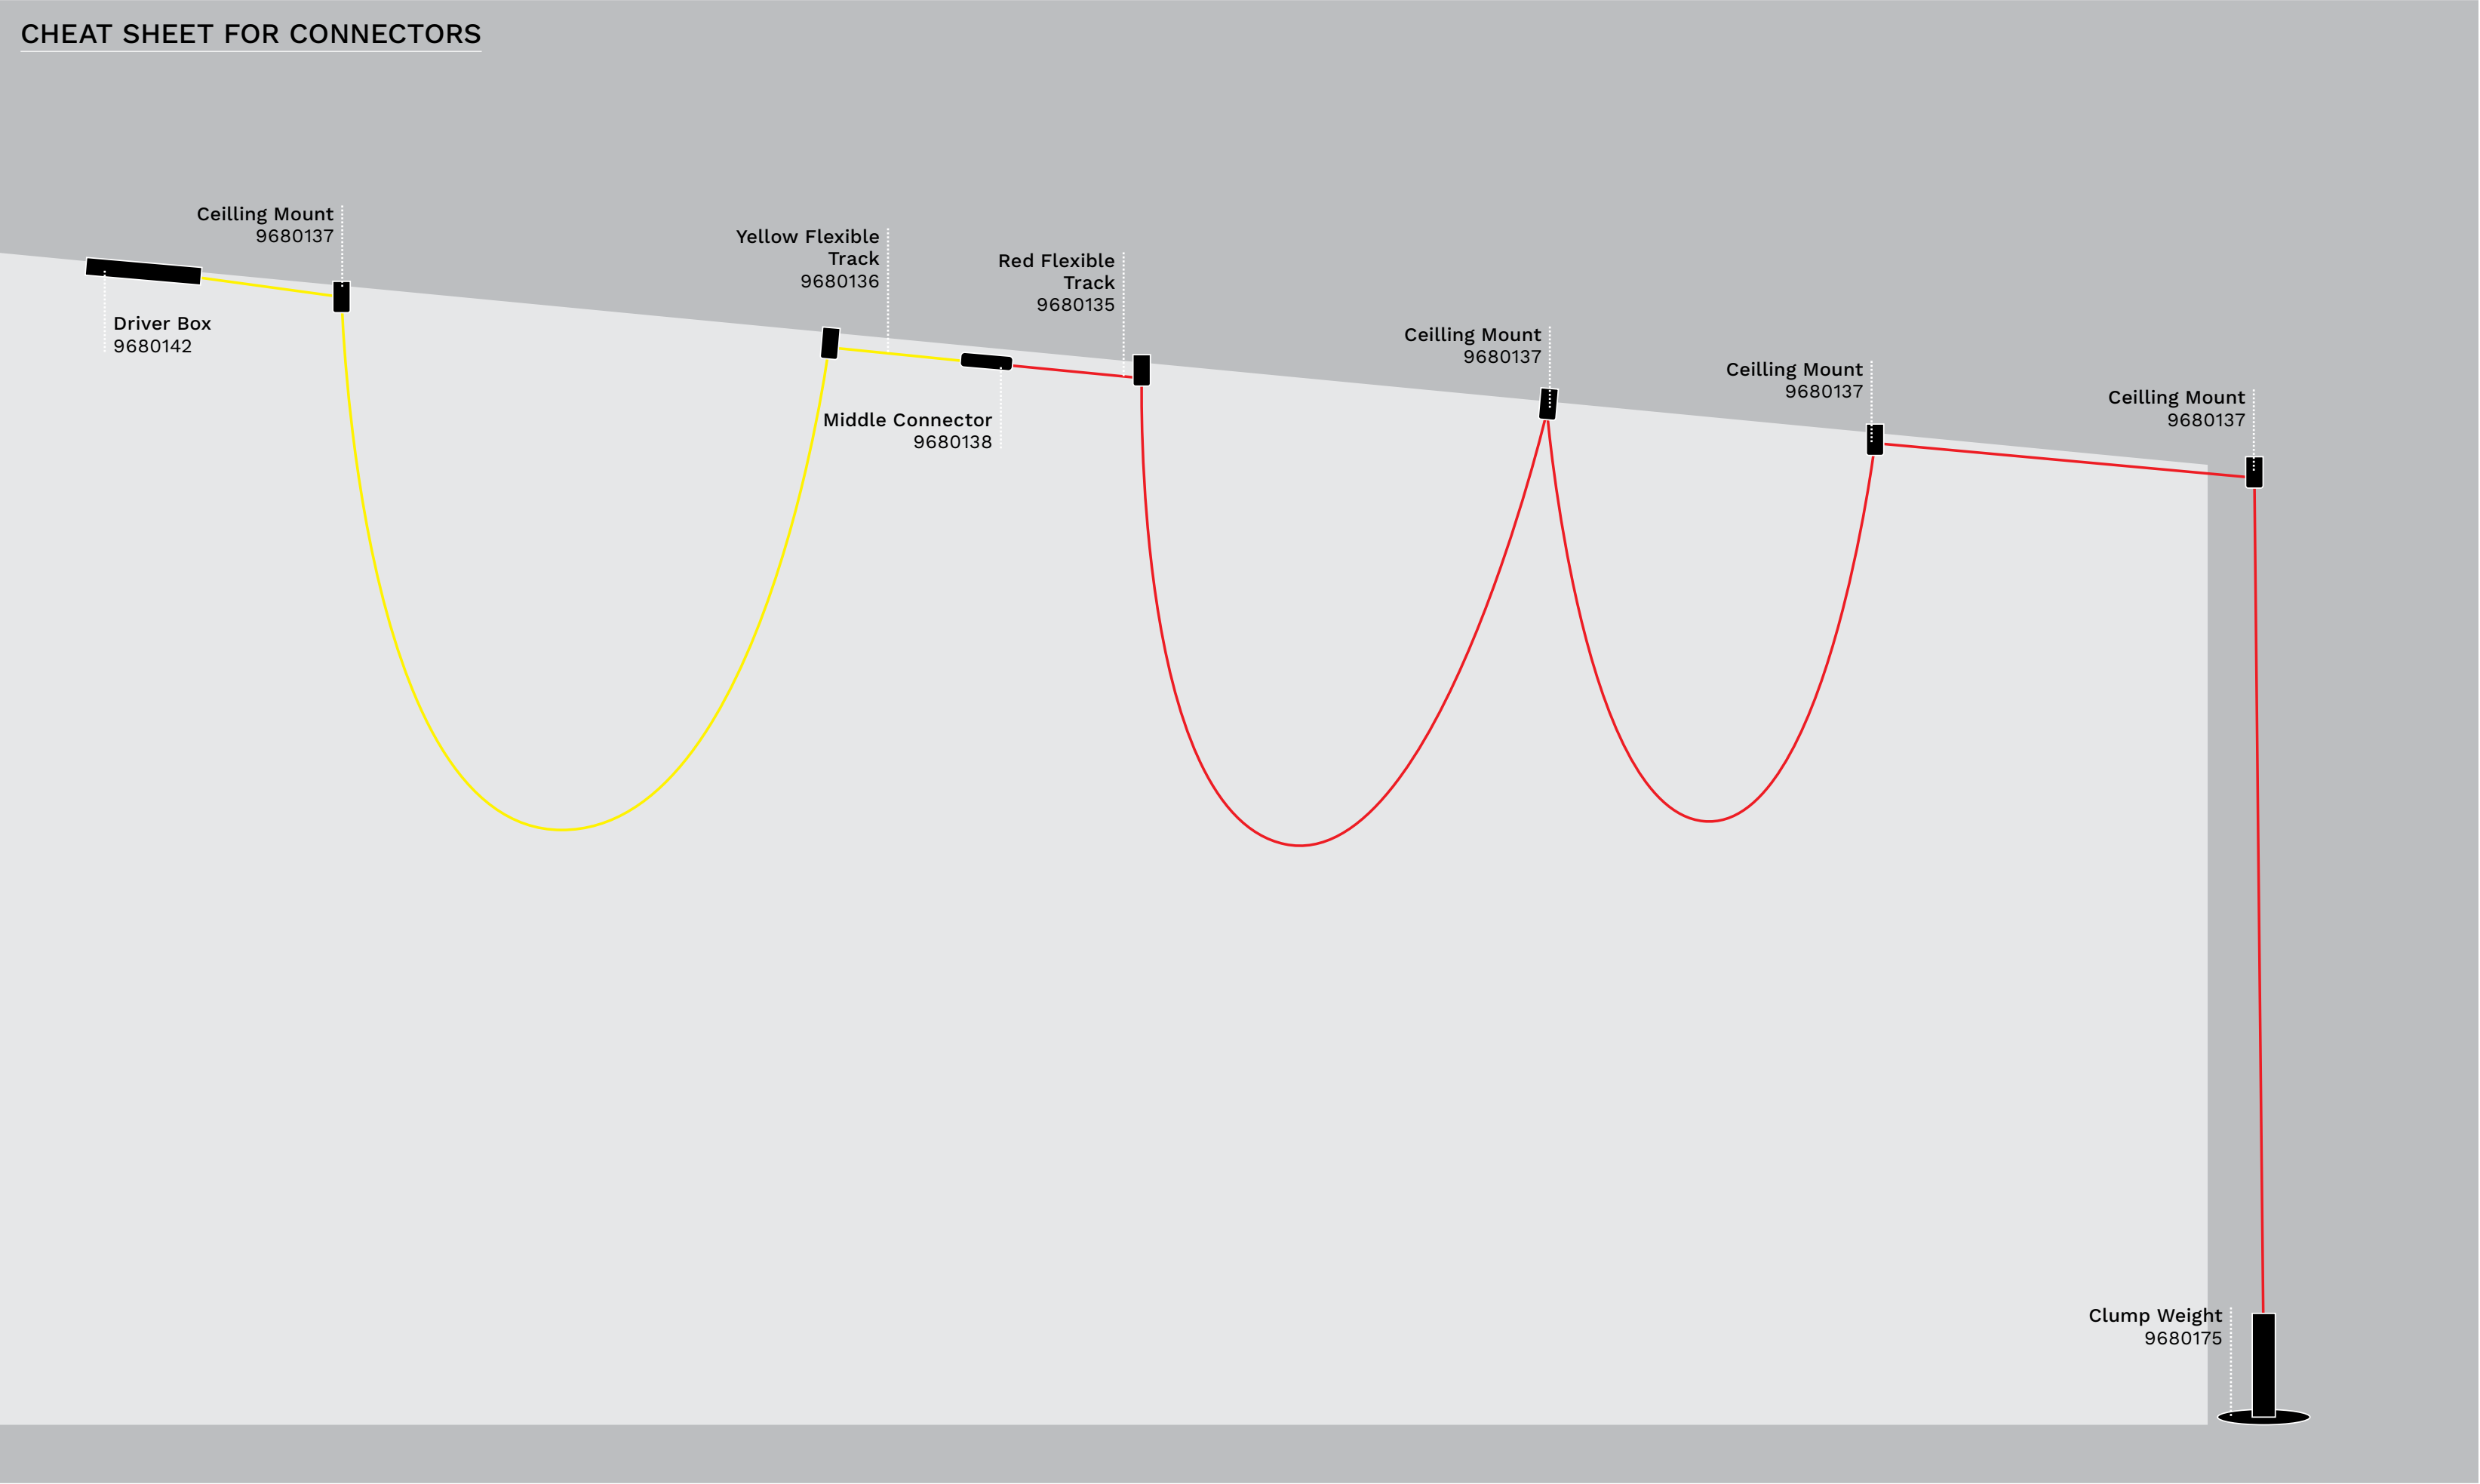



Lighting Modules



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680226 ●	10W	3000K	560Lm	L 15.6 W 3.8 H 7.5	24Vdc	On/Off

IP65

3 YEARS

>30.000 HOURS

IK08

Aluminium

CRI >90

15°

UGR <19

DRIVER EXCLUDED

• Compatible for Outdoor use



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680121 ●	20W	3000K	873Lm	L 49.4 W 2.3 H 4.28	24Vdc	Triac
9680122 ●	40W	3000K	1709Lm	L 92.5 W 2.3 H 4.28	24Vdc	Triac

IP20

3 YEARS

>30.000 HOURS

IK04

Aluminium

CRI >90

36°

UGR <10

DRIVER EXCLUDED

TRIAC

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680218 ●	20W	3000K	488Lm	L 95.1 W 1.6 H 2.45	24Vdc	Triac

IP65

3 YEARS

>30.000 HOURS

IK04

Aluminium

CRI >90

45°

UGR <19

DRIVER EXCLUDED

TRIAC



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680123 ●	20W	3000K	571Lm	L 49.4 W 2.3 H 4.28	24Vdc	Triac
9680124 ●	40W	3000K	1107Lm	L 92.5 W 2.3 H 4.28	24Vdc	Triac

IP20

3 YEARS

>30.000 HOURS

IK04

Aluminium

CRI >90

100°

DRIVER EXCLUDED

TRIAC



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680127 ●	7W	3000K	284Lm	L 11.2 W 2.3 H 8.7	24Vdc	Triac

IP20

3 YEARS

>30.000 HOURS

IK04

Aluminium

CRI >90

36°

UGR <10

DRIVER EXCLUDED

TRIAC



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680128 ●	7W	3000K	138Lm	L 11.8 W 2.3 H 8.7	24Vdc	Triac

IP20

3 YEARS

>30.000 HOURS

IK04

Aluminium

CRI >90

100°

DRIVER EXCLUDED

TRIAC



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680129	12W	3000K	718Lm	D 7.2 H 10.8	24Vdc	Triac



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680125	12W	3000K	622Lm	D 5 H 13	24Vdc	Triac
9680126	18W	3000K	977Lm	D 6.5 H 15.6	24Vdc	Triac



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680215	12W	3000K	667Lm	D 9.1 H 9.75	24Vdc	Triac
9680216	12W	3000K	667Lm	D 9.1 H 9.75	24Vdc	Triac



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680214	5W	3000K	300Lm	D 15 H 15	24Vdc	Triac
9680213	5W	3000K	319Lm	D 18 H 18	24Vdc	Triac



• Compatible for Outdoor use

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680190	5W	3000K	240Lm	D 15.4 H 15.8	24Vdc	Triac
9680191	7W	3000K	248Lm	D 19.7 H 20.2	24Vdc	Triac




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680227	5W	2200K	273Lm	D 15 H 26	24Vdc	Triac



MUST HAVE ACCESSORIES

Power Feed & End Cap


9680225



• Compatible for Outdoor use



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680224	30W	3000K	1860Lm	L 200 W 12.7 H 12.4	24Vdc	Triac




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680130	12W	3000K	898Lm	L 100 D 1.8	24Vdc	Triac
9680131	17W	3000K	1200Lm	L 150 D 1.8	24Vdc	Triac
9680132	22W	3000K	1648Lm	L 200 D 1.8	24Vdc	Triac
9680133	31W	3000K	2358Lm	L 300 D 1.8	24Vdc	Triac



OPTIONAL ACCESSORIES

Accessory for hanging


9680197



• Compatible for Outdoor use



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680194	14W	3000K	335Lm	L 150 D 1.8	24Vdc	Triac





SYMMETRIC

24V TRIAC

48V TUNABLE WHITE - DALI







Symmetric is a **flexible track lighting system** available in both **24Vdc (Triac dimmable)** and **48Vdc (Tunable White)** versions, offering advanced control and adaptability. Designed to span **wall-to-wall installations up to 7 meters** without visible suspension or mounting elements, it provides a clean, modern aesthetic. Compatible with a wide range of **lighting modules**—including **bulb-style, linear fixtures, and spotlights**—Symmetric also includes **IP65-rated versions** for use in damp or outdoor environments, making it a versatile solution for both residential and commercial applications.

Symmetric

SURFACE APPLICATION



TRACKS & ACCESSORIES


		CODE	DESCRIPTION	DIMENSIONS (cm)
TRACKS		9680179	100m Flexible Reel 24Vdc IP65 On/Off (free cut) Sold per meter	
		9680114	100m Flexible Track 48Vdc IP65 On/Off (free cut) Sold per meter	
CONNECTORS	   	9680210	Connector Symmetric to Symmetric	
		9680116	Base Single	
		9680117	Surface Mounted Fixture	
		9680209	Base for Corners	
OTHER ACCESSORIES		9680222	Connector between 24Vdc Symmetric to 24Vdc Chroma Series	
		9680118	Hanging wire	
		9680119	Driver Box for 75W & 100W	
		9680120	Driver Box for 150W & 200W	
		9680115	Cutting Tool	






Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP20	9680143	100 Watt, 220-240VAC, 24Vdc	L 12.9 W 9.7 H 3
	9680144	120 Watt, 220-240VAC, 24Vdc	L 15.9 W 9.7 H 3
	9680145	200 Watt, 220-240VAC, 24Vdc	L 21.5 W 11.5 H 3
	9621500	75 Watt, 220-240VAC, 48VDC 1.6A	L 9.9 W 9.7 H 3
	9621501	100 Watt, 220-240VAC, 48VDC 2.3A	L 12.9 W 9.7 H 3
	9621502	150 Watt, 220-240VAC, 48VDC 3.3A	L 15.9 W 9.7 H 3
	9621503	200 Watt, 220-240VAC, 48VDC 4.4A	L 21.5 W 11.5 H 3
IP67	9621508	75 Watt, 100-240VAC, 24VDC 1A	L 14 W 6.3 H 3.2
	9621509	100 Watt, 100-240VAC, 24VDC 1.1A	L 14 W 6.3 H 3.2
	9621510	150 Watt, 100-240VAC, 24VDC 2A	L 18 W 6.3 H 3.55
	9621511	200 Watt, 100-240VAC, 24VDC 2.4A	L 19.9 W 6.3 H 3.55

Remote Drivers for Triac		
CODE	DESCRIPTION	DIMENSIONS (cm)
9580670	Remote Driver 150W Triac, 24Vdc, without box	L 30 W 8 H 4.2


CHEAT SHEET FOR CONNECTORS

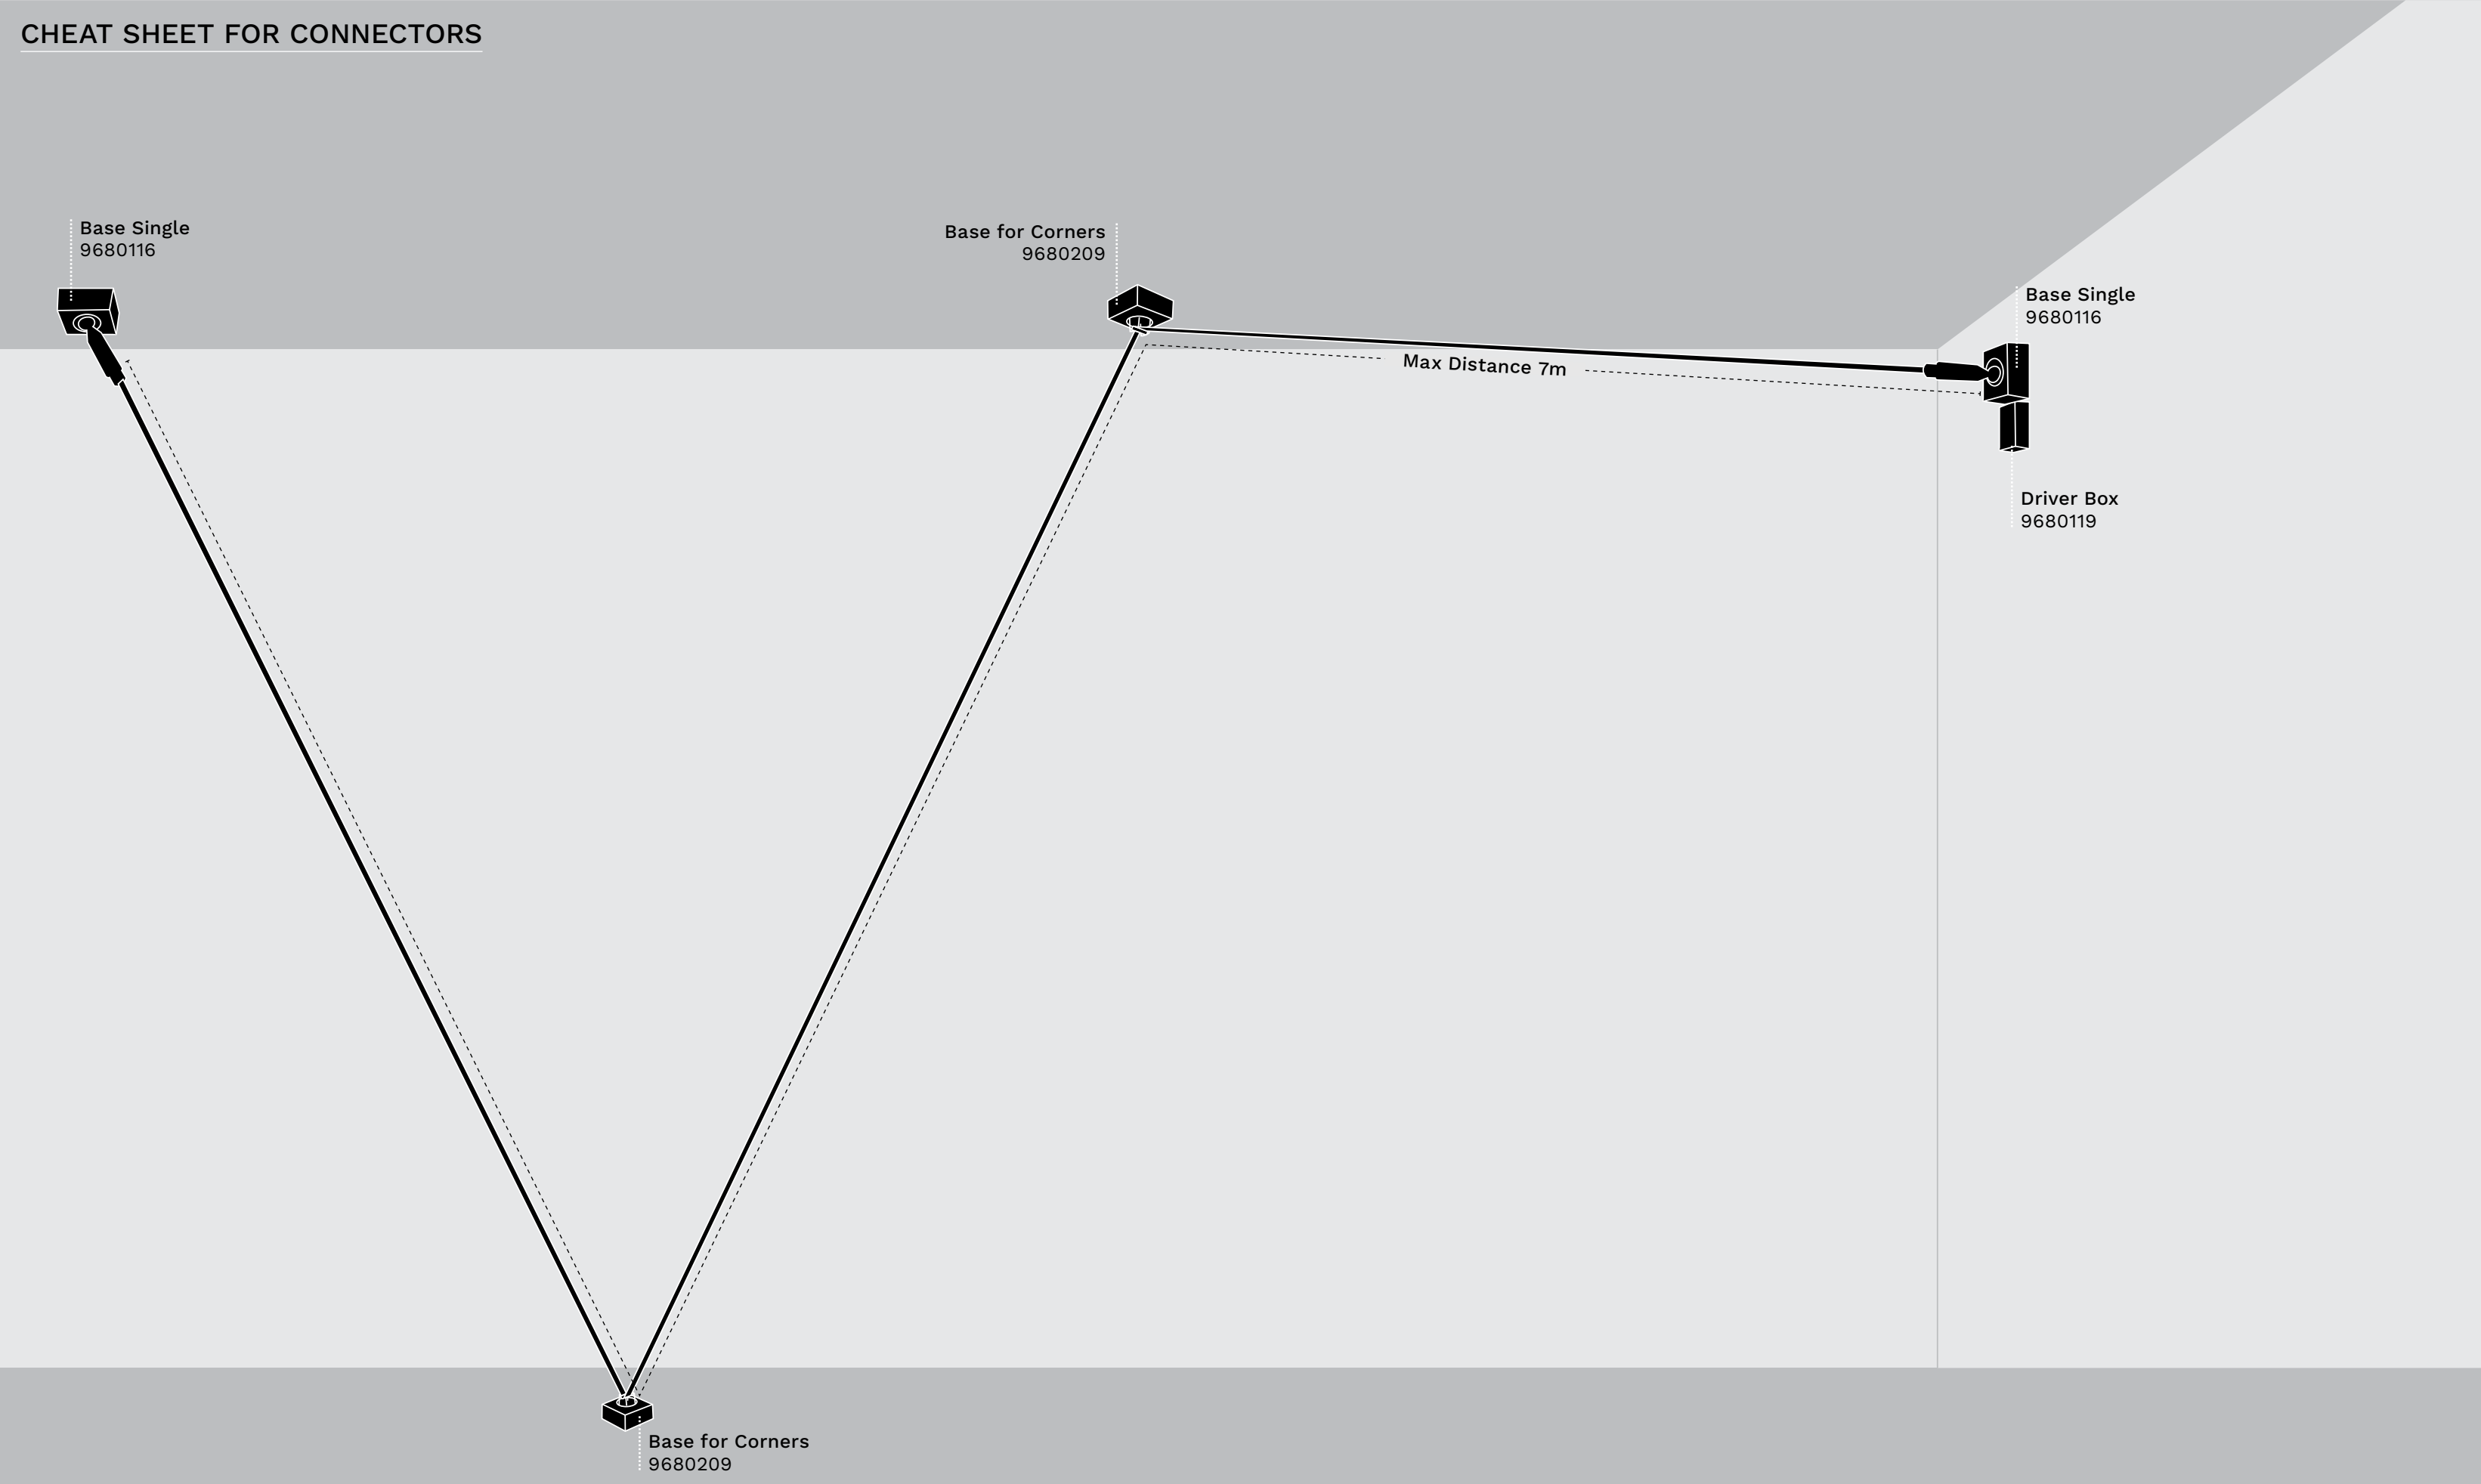


Lighting Modules

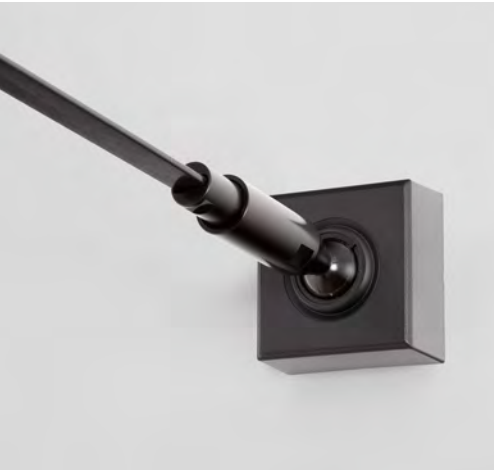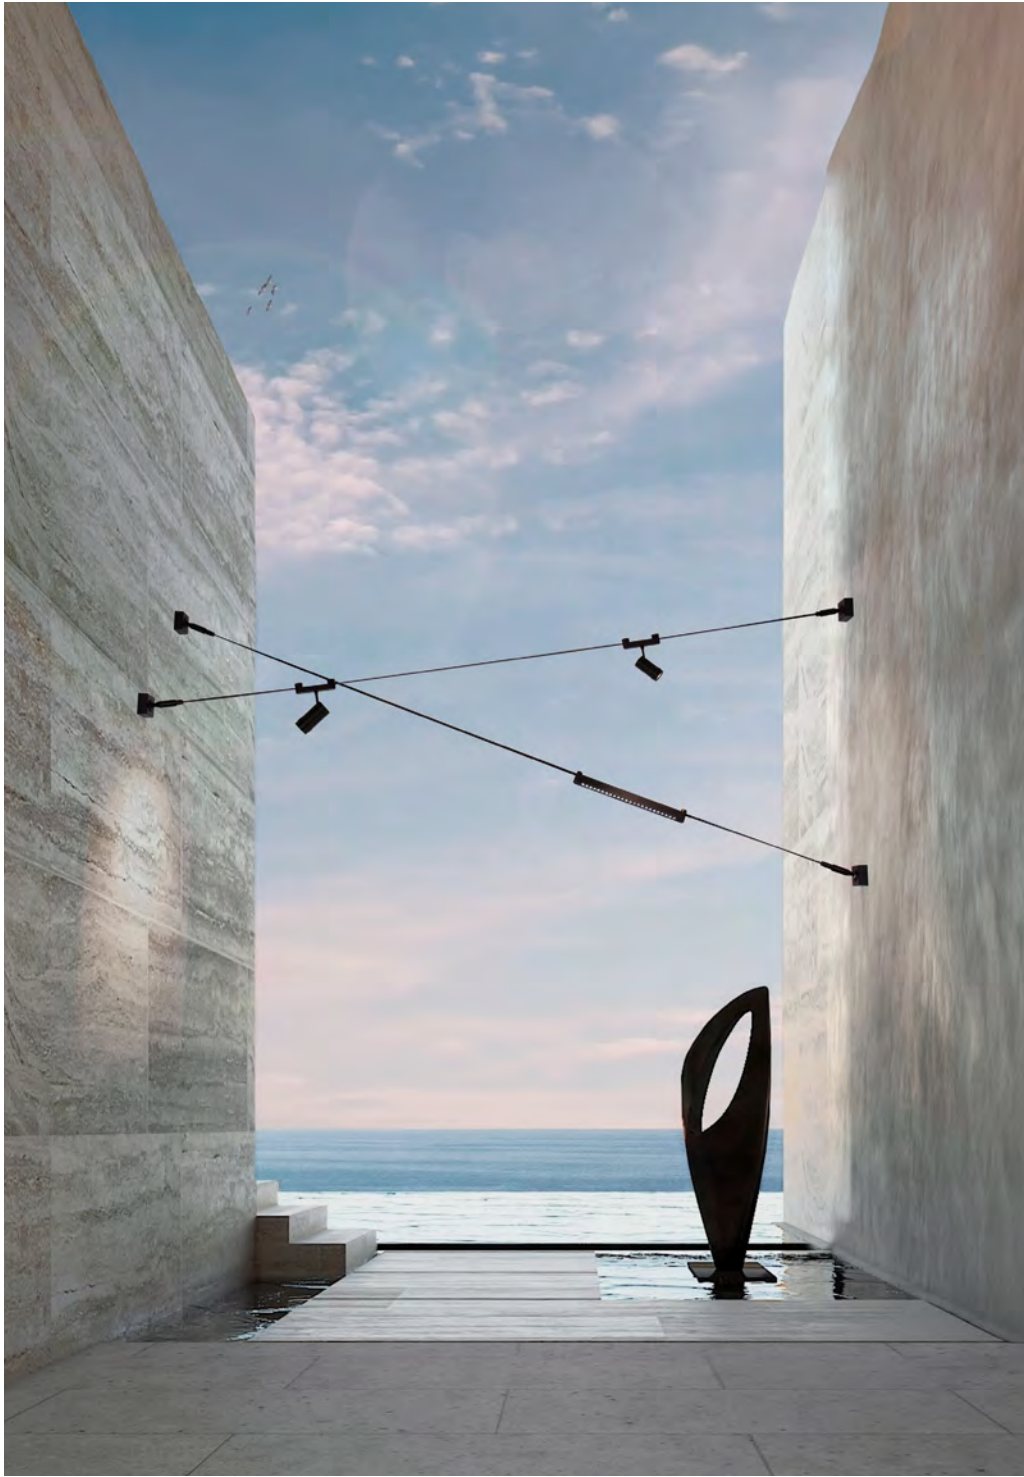


CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680100 ●	20W	3000K	958Lm	L 50.2 W 2.6 H 5.7	24Vdc	Triac
9680200 ●	25W	2700K - 6500K	927Lm	L 50.2 W 2.6 H 5.7	48Vdc	Dali
9680101 ●	40W	3000K	1831Lm	L 93.3 W 2.6 H 5.7	24Vdc	Triac
9680201 ●	48W	2700K - 6500K	1817Lm	L 93.3 W 2.6 H 5.7	48Vdc	Dali



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680102 ●	20W	3000K	582Lm	L 50.2 W 2.6 H 5.7	24Vdc	Triac
9680202 ●	25W	2700K - 6500K	615Lm	L 50.2 W 2.6 H 5.7	48Vdc	Dali
9680103 ●	40W	3000K	1094Lm	L 93.3 W 2.6 H 5.7	24Vdc	Triac
9680203 ●	48W	2700K - 6500K	1785Lm	L 93.3 W 2.6 H 5.7	48Vdc	Dali




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680108 ●	7W	3000K	302Lm	L 11.2 W 2.3 H 8.7	24Vdc	Triac




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680109 ●	7W	3000K	142Lm	L 11.8 W 2.3 H 8.7	24Vdc	Triac




LIGHTING SYSTEMS - SYMMETRIC



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680111 ●	6W	3000K	297Lm	D 5.5 H 10	24Vdc	Triac
9680206 ●	13W	2700K - 6000K	657Lm	D 7.5 H 13	48Vdc	Dali



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680110 ●	10W	3000K	359Lm	D 7.5 H 3.5	24Vdc	Triac




- Adj. Beam Angle
10°-55°




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680106 ●	11W	3000K	522Lm	D 5.5 H 11.5	24Vdc	Triac
9680204 ●	11W	2700K - 6000K	451Lm	D 5.5 H 11.5	48Vdc	Dali
9680107 ●	19W	3000K	1094Lm	D 6.5 H 13.5	24Vdc	Triac
9680205 ●	19W	2700K - 6000K	800Lm	D 6.5 H 13.5	48Vdc	Dali





LIGHTING SYSTEMS - SYMMETRIC




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680104 ●	12W	3000K	658Lm	D 5 H 13	24Vdc	Triac
9680105 ●	18W	3000K	920Lm	D 6.5 H 15.6	24Vdc	Triac




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680112 ●	12W	3000K	586Lm	D 7.2 H 10.8	24Vdc	Triac



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680211 ●	11W	3000K	525Lm	D 6.7 H 9.3	24Vdc	Triac
9680208 ●	11W	2700K - 6000K	533Lm	D 6.7 H 9.3	48Vdc	Dali



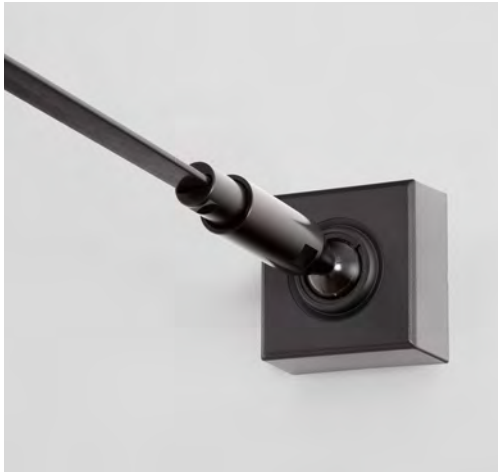



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680113 ●	6W	3000K	206Lm	D 4 H 20.3	24Vdc	Triac



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680212 ●	7W	3000K	275Lm	D 10 H 14.2	24Vdc	Triac
9680207 ●	7W	2700K - 6500K	284Lm	D 10 H 14.2	48Vdc	Dali






• Compatible for Outdoor use


CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680217 ●	12W	3000K	667Lm	D 9.1 H 9.75	24Vdc	Triac



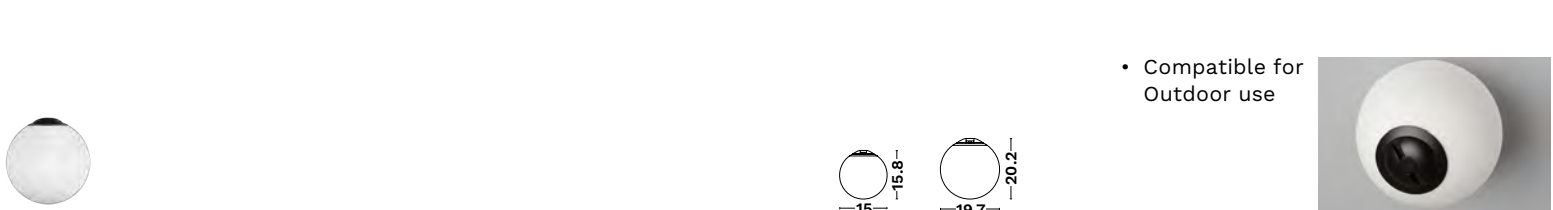

• Compatible for Outdoor use

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680192 ○	5W	3000K	240Lm	D 15 H 15.8	24Vdc	Triac
9680193 ○	7W	3000K	280Lm	D 19.7 H 20.2	24Vdc	Triac





OPTIONAL ACCESSORIES
Accessory for hanging
9680198

• Compatible for Outdoor use

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680195 ○	14W	3000K	335Lm	D 1.8 H 150	24Vdc	Triac
9680196 ○	27W	3000K	954Lm	D 1.8 H 300	24Vdc	Triac





GLOW
LIGHTING SYSTEMS
24V

Glow Track 24V is a versatile and compact lighting solution that features its own range of **spotlights** and **linear modules**, designed for sleek performance and visual appeal. It can be seamlessly combined with our **Chroma 24V system**, allowing for a wide variety of configurations. This interoperability opens up **unlimited possibilities** in lighting design, enabling the creation of **customized, layered lighting effects** that blend functionality with architectural style—perfect for any modern interior.

Glow

SURFACE MOUNTED ACCESSORIES USAGE




TRACKS & ACCESSORIES

		CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9680147	1m Track (24Vdc)	
		9680148	2m Track (24Vdc)	
CONNECTORS		9680151	1m Wire for Track Electrical Connection	
		9680162	End Cap	
		9680164	Horizontal 90° Mechanical Connector	
		9680163	Vertical 90° Mechanical Connector	
		9680167	Horizontal 135° Mechanical Connector	
SUSPEND ACCESSORIES		9680166	Horizontal 45° Mechanical Connector	
		9680176	Connector for Chroma	
		9680177	Plug Converter 5m for Chroma	
OTHER ACCESSORIES		9680178	Plug Converter 10m for Chroma	
		9680171	Corner Suspension Connector	
		9680172	Linear Suspension Connector	
		9680173	Hanging Accessories 1.2m	
DRIVER BOXES		9680174	Hanging Accessories 2m	
		9680170	Driver Box Ceiling for 100W & 150W	
		9680168	Driver Box on Track for 100W & 150W	
		9680169	Driver Box on Track for 200W	

Glow

RECESSED APPLICATION without gap




TRACKS & ACCESSORIES

		CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9680149	1m Track (24Vdc) Cut-Out: 2.7cm	
		9680150	2m Track (24Vdc) Cut-Out: 2.7cm	
CONNECTORS		9680151	1m Wire for Track Electrical Connection	
		9680165	End Cap	
		9680164	Horizontal 90° Mechanical Connector	
		9680167	Horizontal 135° Mechanical Connector	
		9680166	Horizontal 45° Mechanical Connector	
SUSPEND ACCESSORIES		9680176	Power Connector	
		9680177	Plug Converter 5m for Chroma	
		9680178	Plug Converter 10m for Chroma	
DRIVER BOXES		9680168	Driver Box on Track for 100W & 150W	
		9680169	Driver Box on Track for 200W	

Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP20	9680143	100 Watt, 220-240VAC, 24Vdc	L 12.9 W 9.7 H 3
	9680144	150 Watt, 220-240VAC, 24Vdc	L 15.9 W 9.7 H 3
	9680145	200 Watt, 220-240VAC, 24Vdc	L 21.5 W 11.5 H 3

CHEAT SHEET FOR CONNECTORS


S: SURFACE
R: RECESSED

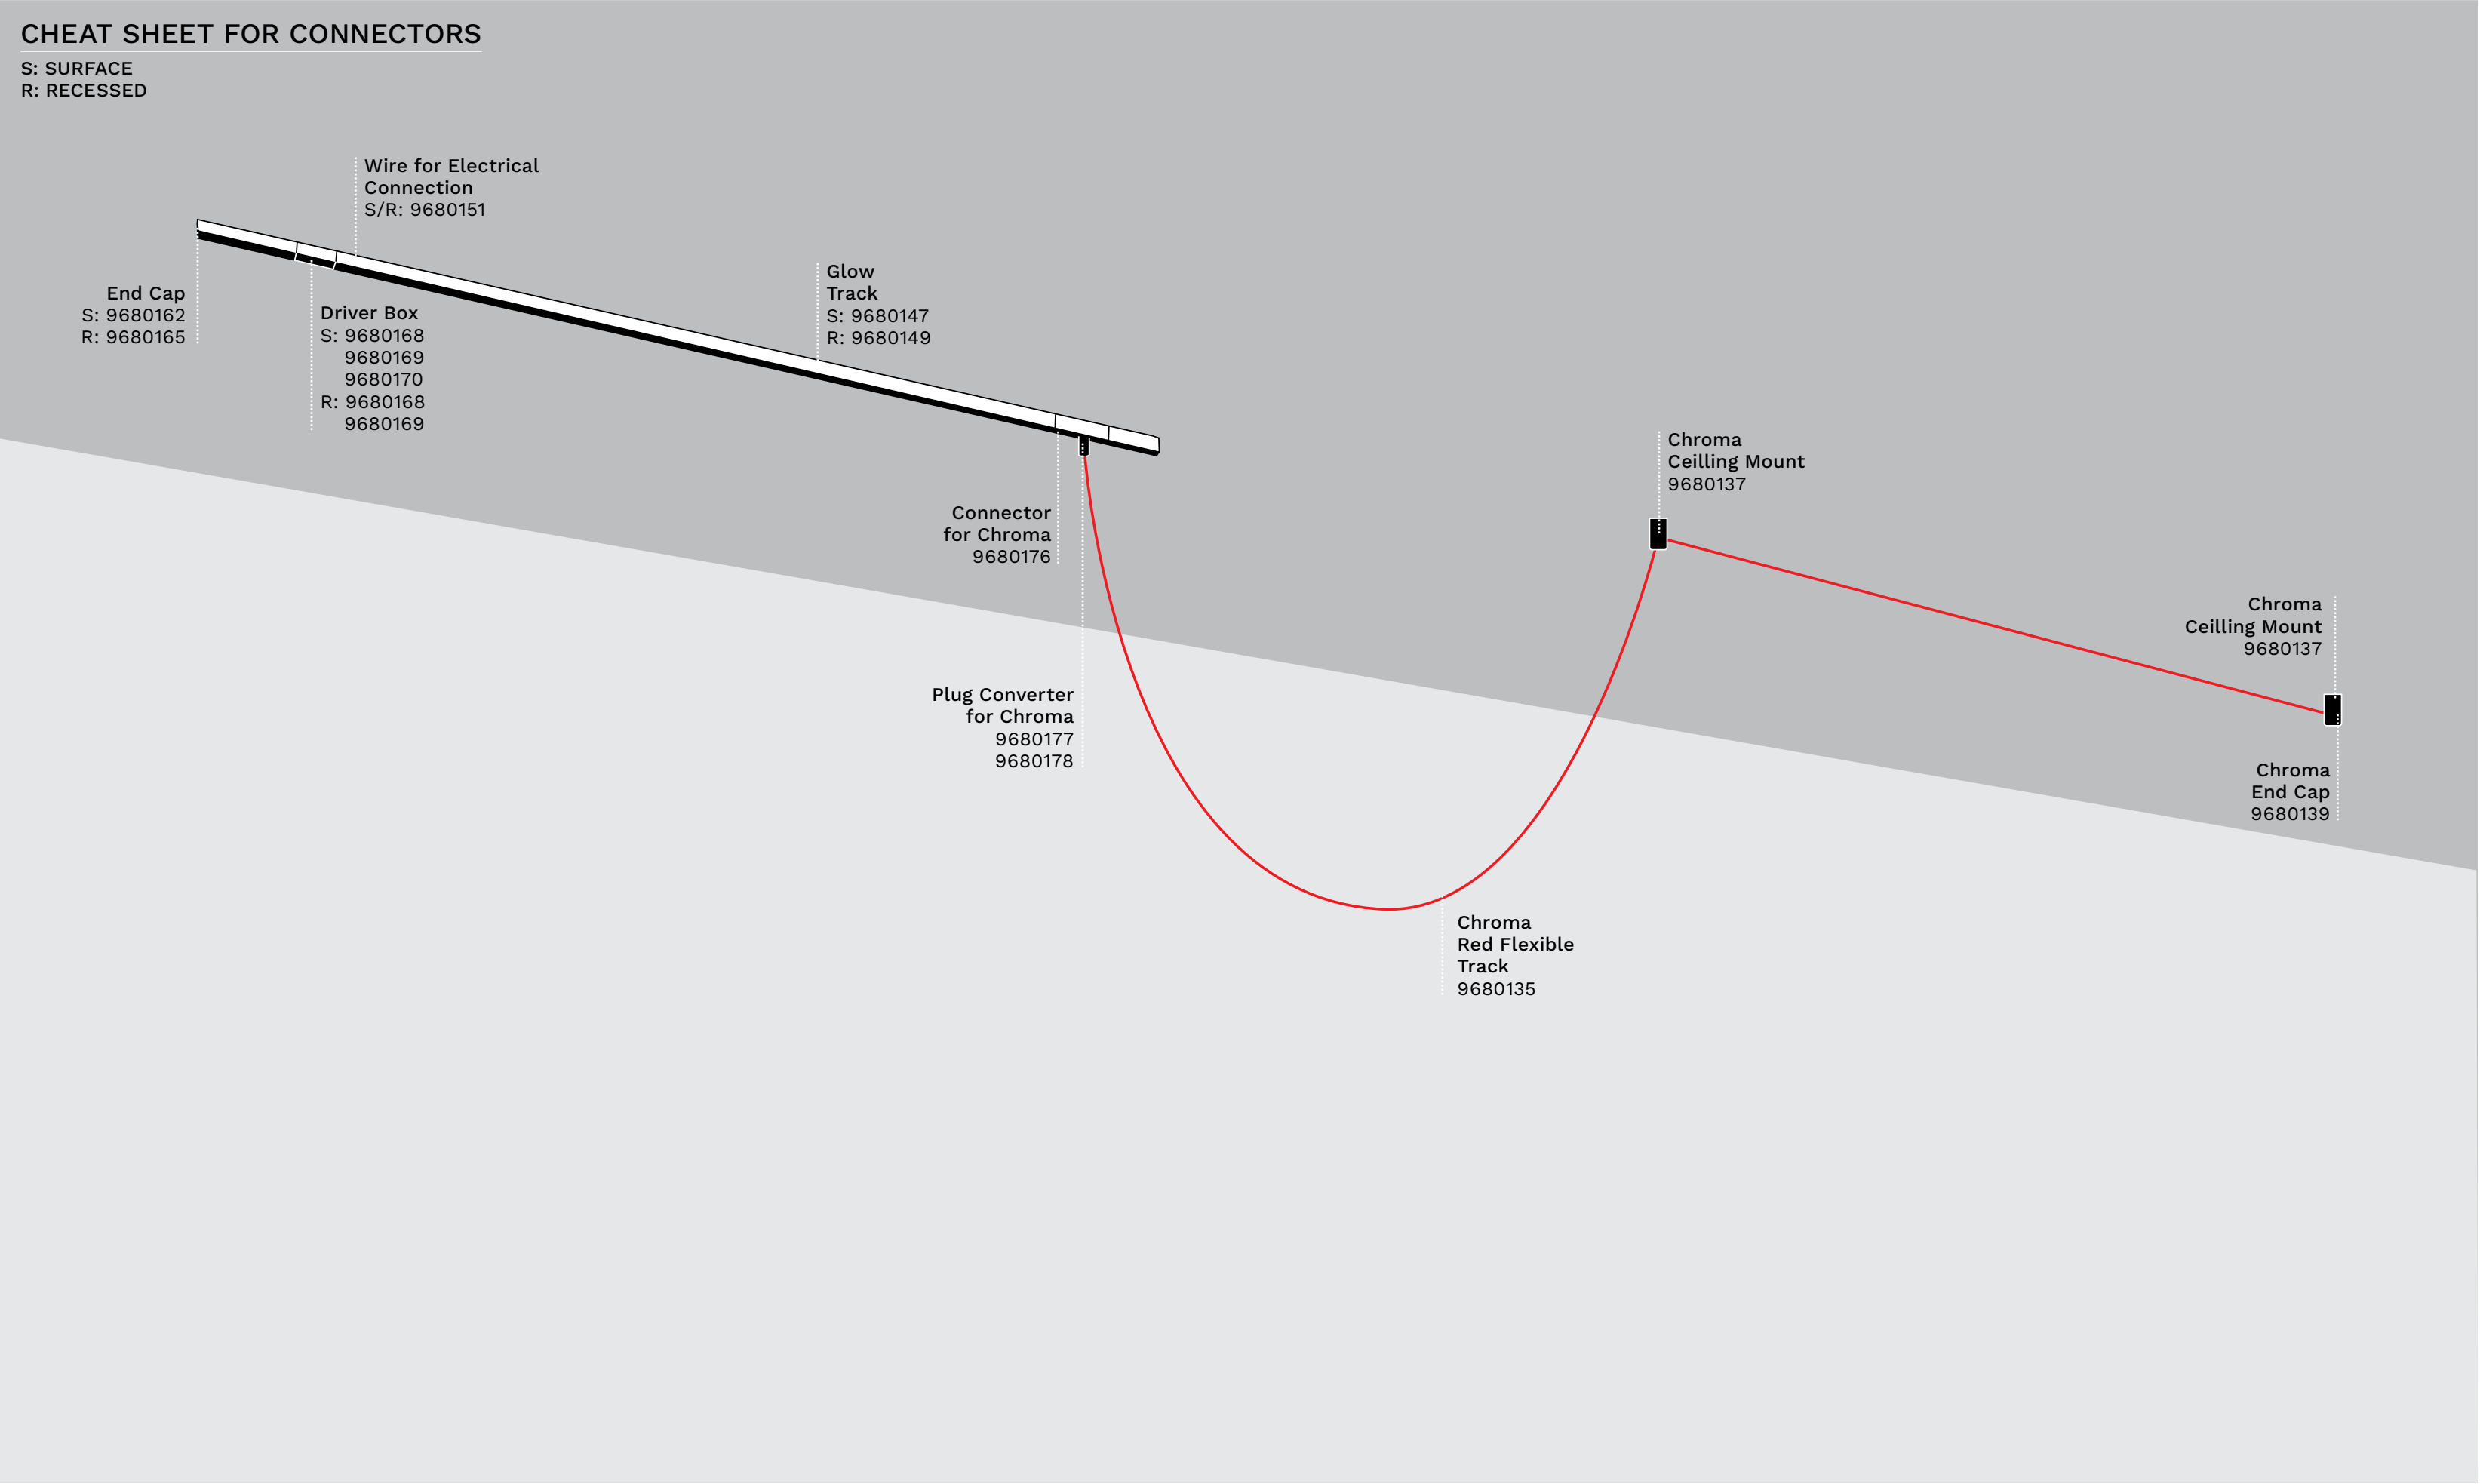

Lighting
Modules



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680155	10W	3000K	185Lm	L 41 W 1.5 H 1.7	24Vdc	On/Off
9680156	19W	3000K	367Lm	L 71 W 1.5 H 1.7	24Vdc	On/Off

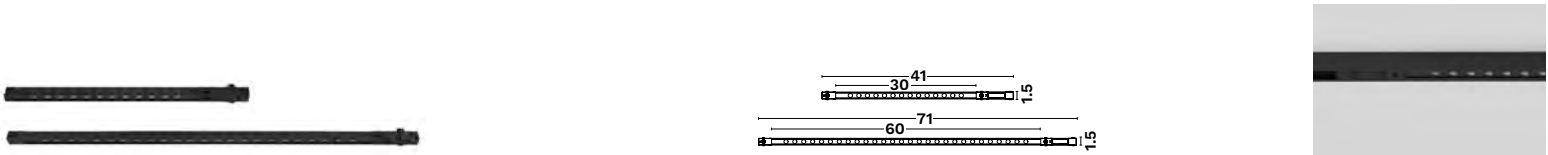

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680157	10W	3000K	430Lm	L 41 W 1.5 H 1.7	24Vdc	On/Off
9680158	19W	3000K	833Lm	L 71 W 1.5 H 1.7	24Vdc	On/Off






CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680160	8W	3000K	138Lm	L 11.8 W 2.3 H 8.7	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680159	8W	3000K	302Lm	L 11.2 W 2.3 H 8.7	24Vdc	On/Off




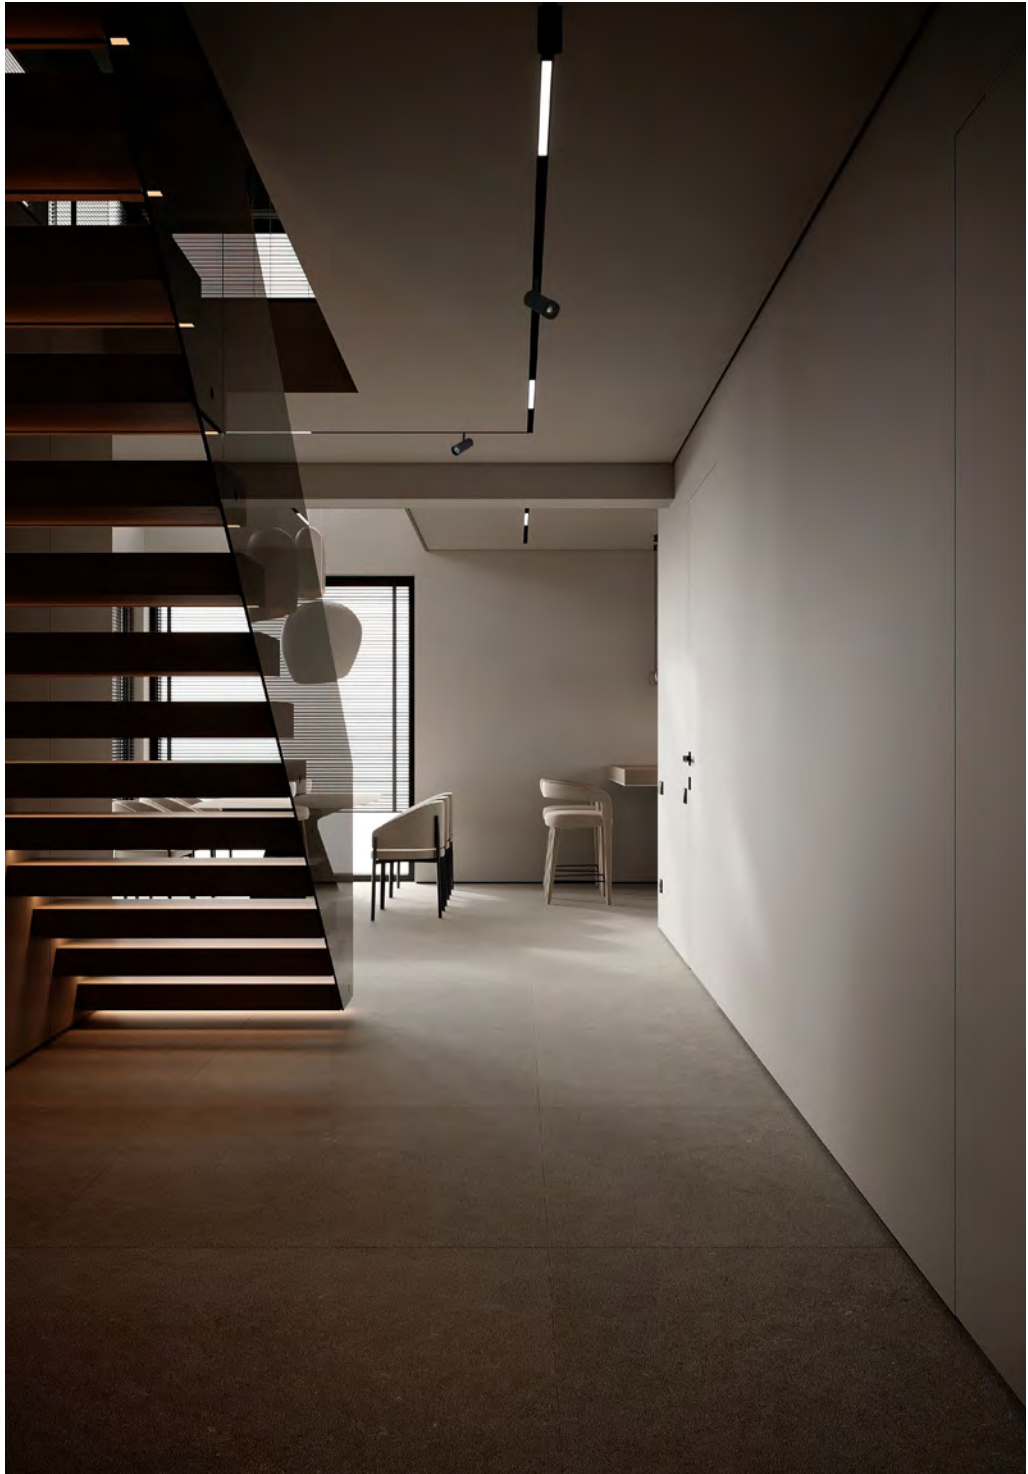



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680153	10W	3000K	822Lm	D 5.5 H 11.5	24Vdc	On/Off
9680154	18W	3000K	905Lm	D 6.5 H 13.5	24Vdc	On/Off





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680152	12W	3000K	622Lm	D 5 H 13	24Vdc	On/Off





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9680161	6W	3000K	206Lm	D 4 H 20.3	24Vdc	On/Off









IMAGINE
LIGHTING SYSTEMS

Imagine is a **modular lighting system** built around a universal base that supports a wide selection of **interchangeable lighting modules**. Designed for **maximum flexibility**, this concept allows a single base to adapt to **unlimited applications**—from spotlights and linears to decorative elements—making it easy to customize or upgrade lighting without changing the entire fixture. With **one modular system**, Imagine simplifies installation, reduces waste, and delivers tailored solutions for any residential, commercial, or architectural environment.

HOW TO CONNECT

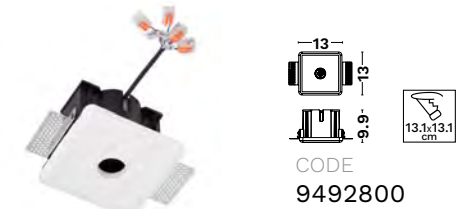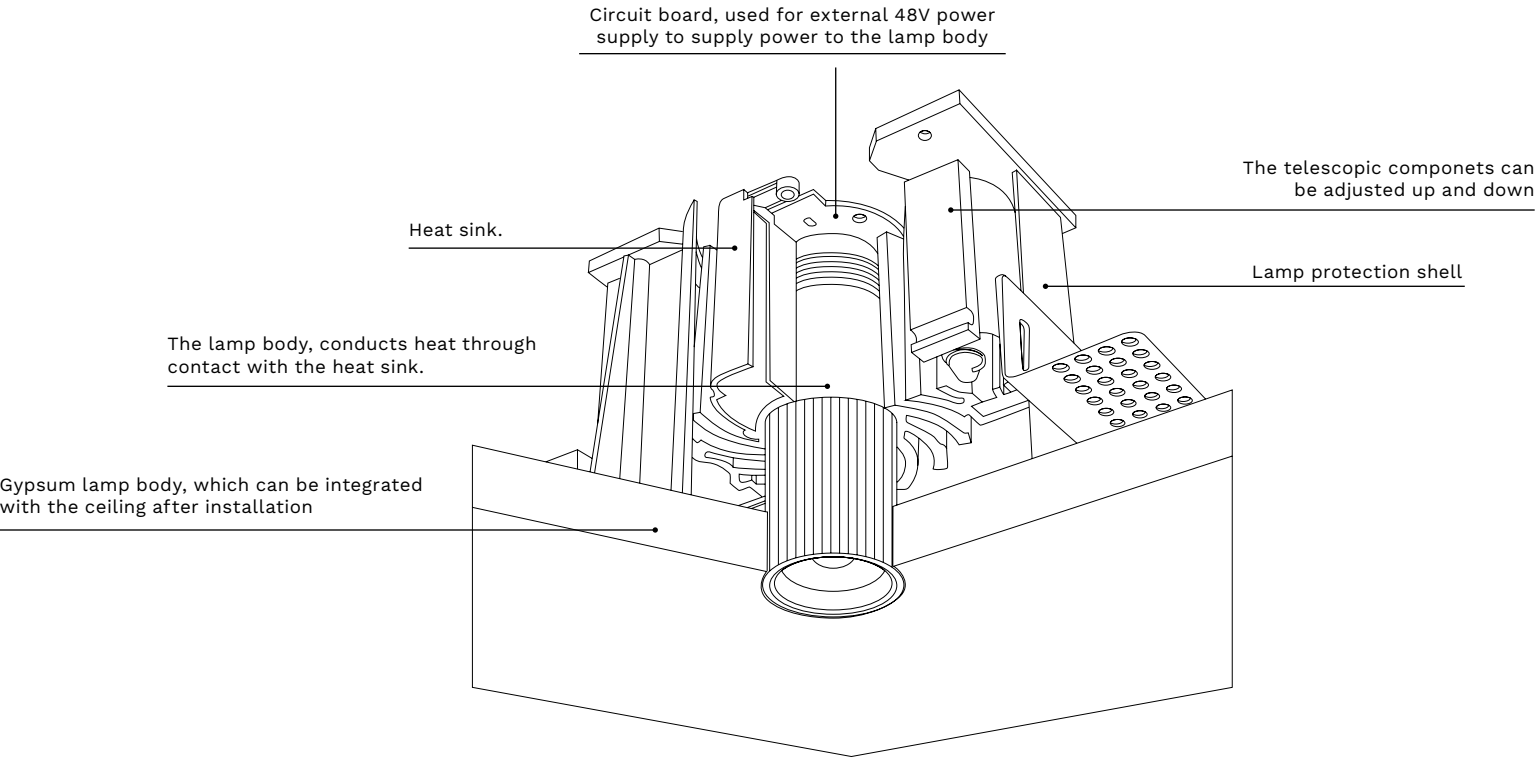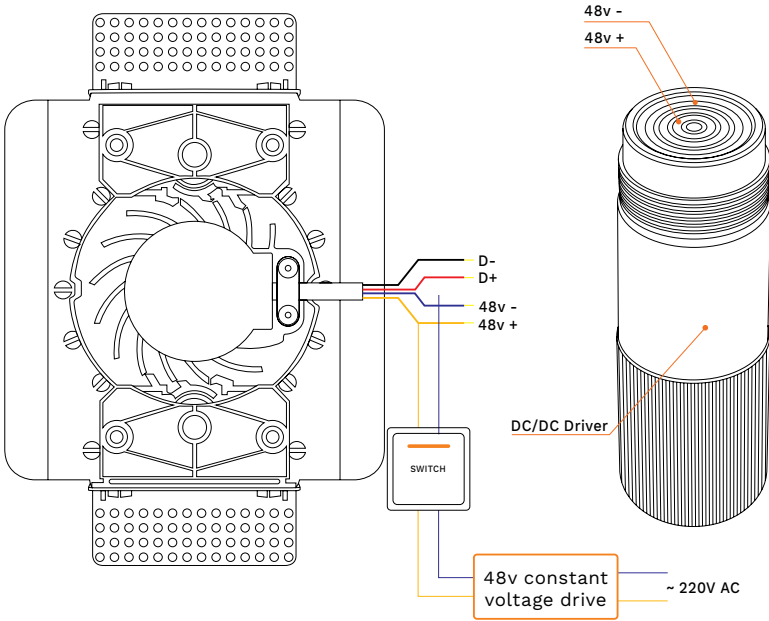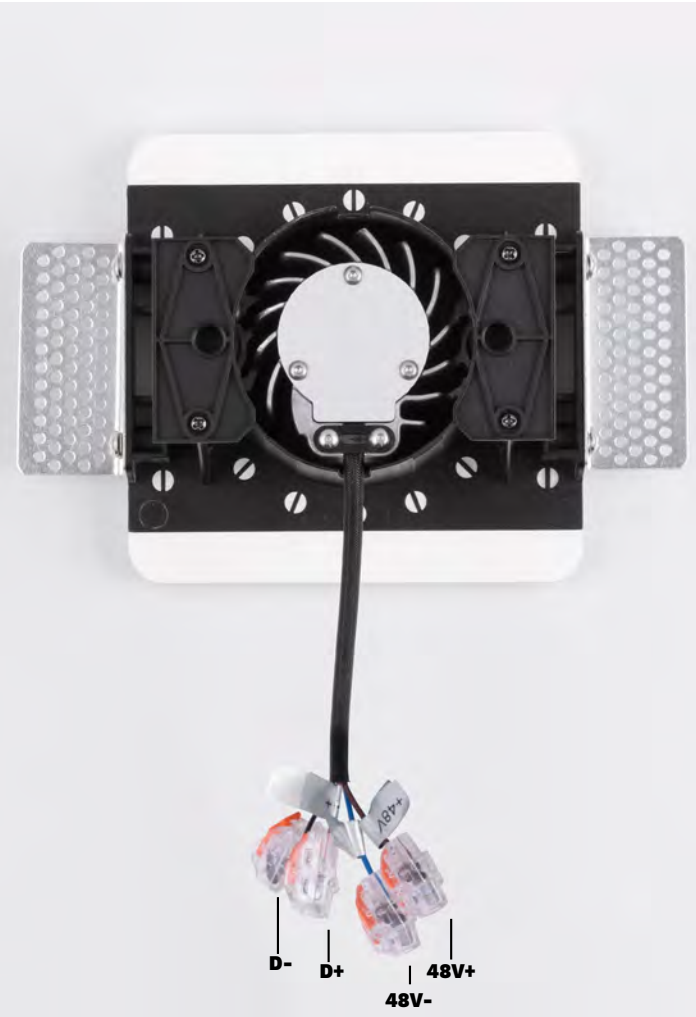

DIMENSIONS (cm)
L 13 W 13 H 9.9



DIMENSIONS (cm)
L 22 W 13 H 9.9



Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP20	9621500	75 Watt, 220-240VAC, 48VDC 1.6A	L 9.9 W 9.7 H 3
	9621501	100 Watt, 220-240VAC, 48VDC 2.3A	L 12.9 W 9.7 H 3
	9621502	150 Watt, 220-240VAC, 48VDC 3.3A	L 15.9 W 9.7 H 3
IP67	9621504	75 Watt, 100-240VAC, 48VDC 1A	L 14 W 6.3 H 3.2
	9621505	100 Watt, 100-240VAC, 48VDC 1.1A	L 14 W 6.3 H 3.2
	9621506	150 Watt, 100-240VAC, 48VDC 2A	L 18 W 6.3 H 3.55
	9621507	200 Watt, 100-240VAC, 48VDC 2.4A	L 19.9 W 6.3 H 3.55



Lighting Modules



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492805 ○	13W	3000K	946Lm	D 3.1 H 9.3	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492854 ●	12W	2700K	946Lm	D 3.1 H 9.1	48Vdc	On/Off
9492802 ●	12W	3000K	946Lm	D 3.1 H 9.1	48Vdc	On/Off
9492875 ●	12W	3000K	946Lm	D 3.1 H 9.1	48Vdc	Dali
9492855 ○	12W	2700K	946Lm	D 3.1 H 9.1	48Vdc	On/Off
9492803 ○	12W	3000K	946Lm	D 3.1 H 9.1	48Vdc	On/Off




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492830 ●	12W	3000K	427Lm	L 21.9 W 2.3 H 13.5	48Vdc	On/Off
9492832 ○	12W	3000K	635Lm	L 21.9 W 2.3 H 13.5	48Vdc	On/Off

- Rotatable 355° and Vertically 90°
- Hihg Visual Comfort


CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492812 ●	6W	3000K	483Lm	L 13.6 W 2.1 H 13.5	48Vdc	On/Off
9492877 ●	6W	3000K	483Lm	L 13.6 W 2.1 H 13.5	48Vdc	Dali
9492813 ○	6W	3000K	483Lm	L 13.6 W 2.1 H 13.5	48Vdc	On/Off
9492814 ●	12W	3000K	976Lm	L 21.9 W 2.1 H 13.5	48Vdc	On/Off
9492878 ●	12W	3000K	976Lm	L 21.9 W 2.1 H 13.5	48Vdc	Dali
9492815 ○	12W	3000K	976Lm	L 21.9 W 2.1 H 13.5	48Vdc	On/Off


- Wallwasher
- Adjustable Light Direction

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492810 ●	12W	3000K	645Lm	L 26.9 W 2.3 H 13.5	48Vdc	On/Off

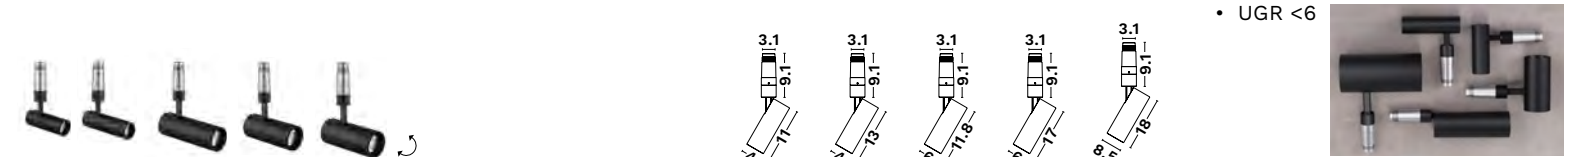

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492821 ●	6W	3000K	395Lm	D 4 H 11	48Vdc	On/Off
9492879 ●	6W	3000K	395Lm	D 4 H 11	48Vdc	Dali
9492861 ○	6W	2700K	401Lm	D 4 H 11	48Vdc	On/Off
9492825 ○	6W	3000K	401Lm	D 4 H 11	48Vdc	On/Off
9492858 ●	8W	2700K	484Lm	D 4 H 13	48Vdc	On/Off
9492822 ●	8W	3000K	484Lm	D 4 H 13	48Vdc	On/Off
9492880 ●	8W	3000K	484Lm	D 4 H 13	48Vdc	Dali
9492862 ○	8W	2700K	508Lm	D 4 H 13	48Vdc	On/Off
9492826 ○	8W	3000K	508Lm	D 4 H 13	48Vdc	On/Off
9492859 ●	15W	2700K	1180Lm	D 6 H 11.8	48Vdc	On/Off
9492823 ●	15W	3000K	1180Lm	D 6 H 11.8	48Vdc	On/Off
9492881 ●	15W	3000K	1180Lm	D 6 H 11.8	48Vdc	Dali
9492863 ○	15W	2700K	1180Lm	D 6 H 11.8	48Vdc	On/Off
9492827 ○	15W	3000K	1180Lm	D 6 H 11.8	48Vdc	On/Off
9492860 ●	23W	2700K	1992Lm	D 6 H 17	48Vdc	On/Off
9492824 ●	23W	3000K	1992Lm	D 6 H 17	48Vdc	On/Off
9492882 ●	23W	3000K	1992Lm	D 6 H 17	48Vdc	Dali
9492864 ○	23W	2700K	1992Lm	D 6 H 17	48Vdc	On/Off
9492828 ○	23W	3000K	1992Lm	D 6 H 17	48Vdc	On/Off
9492872 ●	35W	3000K	2584Lm	D 8.5 H 11.8	48Vdc	On/Off


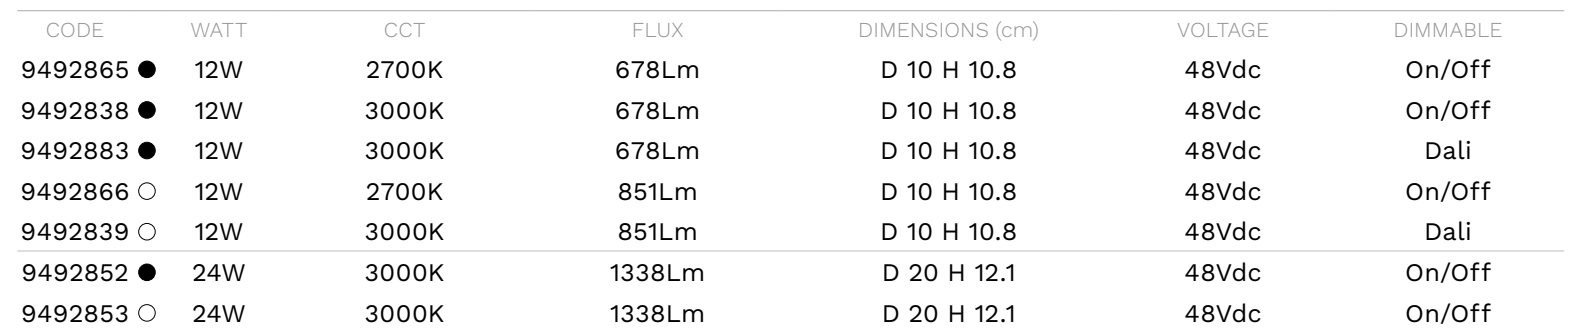


						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492849 ○	5W	3000K	372Lm	D 2.5 H 120	48Vdc	On/Off
9492874 ●	8W	3000K	593Lm	D 4 H 120	48Vdc	On/Off




						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492869 ●	8W	2700K	828Lm	D 4 H 120	48Vdc	On/Off
9492846 ●	8W	3000K	828Lm	D 4 H 120	48Vdc	On/Off
9492884 ●	8W	3000K	828Lm	D 4 H 120	48Vdc	Dali
9492870 ○	8W	2700K	745Lm	D 4 H 120	48Vdc	On/Off
9492847 ○	8W	3000K	745Lm	D 4 H 120	48Vdc	On/Off




						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492871 	6W	3000K	414Lm	D 5 H 120	48Vdc	On/Off
9492851 	6W	3000K	414Lm	D 5 H 120	48Vdc	On/Off
9492885 	6W	3000K	414Lm	D 5 H 120	48Vdc	Dali
9492850 	6W	3000K	414Lm	D 5 H 120	48Vdc	On/Off




																				
CODE		WATT		CCT		FLUX		DIMENSIONS (cm)		VOLTAGE		DIMMABLE								
9492867		● 8W		2700K		520Lm		D 8.2 H 120		48Vdc		On/Off								
9492844		● 8W		3000K		520Lm		D 8.2 H 120		48Vdc		On/Off								



																				
CODE		WATT		CCT		FLUX		DIMENSIONS (cm)		VOLTAGE		DIMMABLE								
9492868		● 6W		2700K		428Lm		D 7 H 120		48Vdc		On/Off								
9492845		● 6W		3000K		428Lm		D 7 H 120		48Vdc		On/Off								




						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492819 ●	12W	3000K	516Lm	D 5 H 250	48Vdc	On/Off
9492820 ○	12W	3000K	516Lm	D 5 H 250	48Vdc	On/Off






IMAGINE 2
LIGHTING SYSTEMS

Imagine 2 is the **updated and simplified evolution** of our original modular lighting family, maintaining all the core benefits of the first generation—a **universal base**, **interchangeable lighting modules**, and **versatile applications**. What sets Imagine 2 apart is its added functionality: the ability to **easily replace the driver**, enhancing long-term serviceability and flexibility. With the same **modular design philosophy** and improved practicality, Imagine 2 offers a streamlined solution for adaptable and future-proof lighting installations.

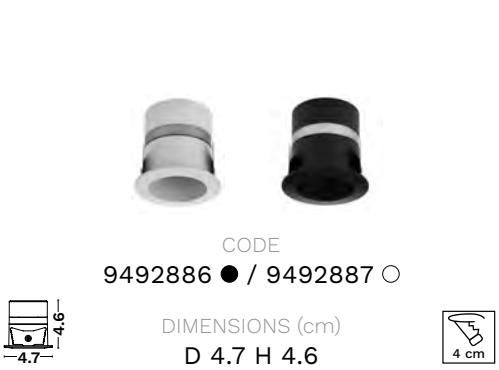


HOW TO INSTALL

9492888, 9492889, 9492886, 9492887

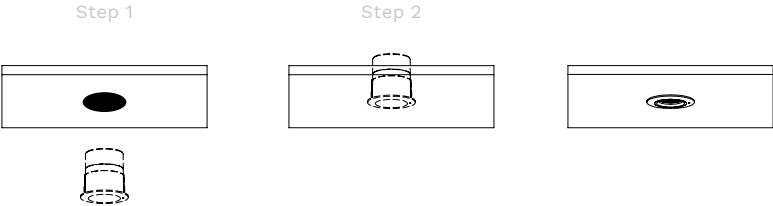

HOW TO CONNECT LIGHT MODULES

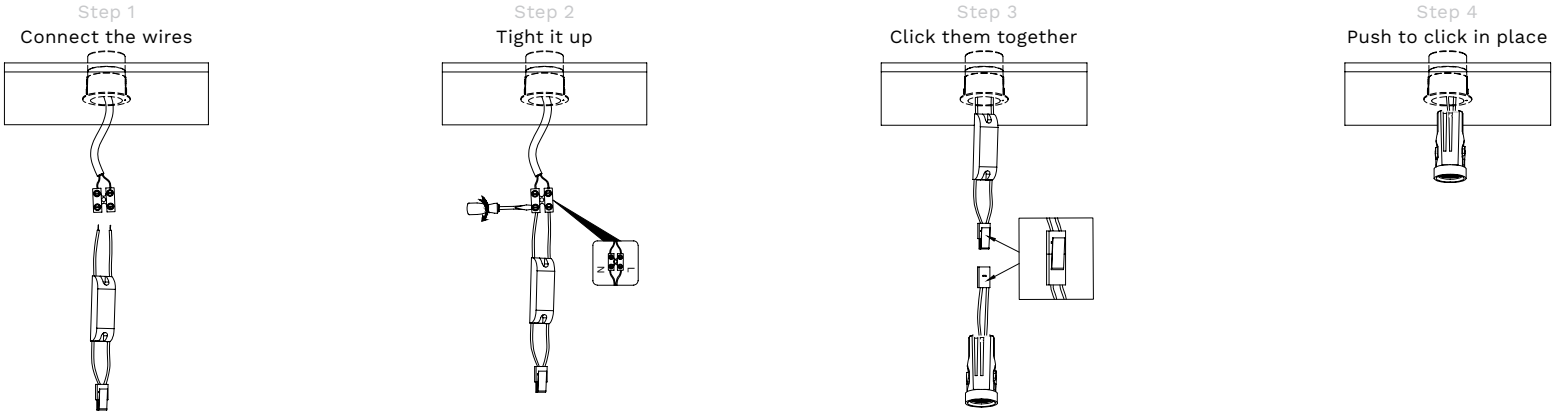

BY CHOOSING 48VDC LIGHTING MODULES, REMOTE DRIVER 48VDC IS NEEDED


Remote Drivers for 48Vdc Lighting Modules			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP20	9621500	75 Watt, 220-240VAC, 48VDC 1.6A	L 9.9 W 9.7 H 3
	9621501	100 Watt, 220-240VAC, 48VDC 2.3A	L 12.9 W 9.7 H 3
	9621502	150 Watt, 220-240VAC, 48VDC 3.3A	L 15.9 W 9.7 H 3
IP67	9621504	75 Watt, 100-240VAC, 48VDC 1A	L 14 W 6.3 H 3.2
	9621505	100 Watt, 100-240VAC, 48VDC 1.1A	L 14 W 6.3 H 3.2
	9621506	150 Watt, 100-240VAC, 48VDC 2A	L 18 W 6.3 H 3.55
	9621507	200 Watt, 100-240VAC, 48VDC 2.4A	L 19.9 W 6.3 H 3.55



Lighting
Modules



						• Microprismatic Lens • Rotatable 355° and Vertically 90°	
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE	
9492892 ●	6W	3000K	213Lm	L 11.1 W 2.5 H 9.4	220-240Vac	On/Off	
9492893 ○	6W	3000K	267Lm	L 11.1 W 2.5 H 9.4	220-240Vac	On/Off	
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE	
9492894 ●	12W	3000K	584Lm	L 22 W 2.5 H 9.4	48Vdc	On/Off	
9492895 ○	12W	3000K	584Lm	L 22 W 2.5 H 9.4	48Vdc	On/Off	
9492916 ●	12W	3000K	584Lm	L 22 W 2.5 H 9.4	48Vdc	Dali	
						• Microprismatic Lens • Rotatable 355° and Vertically 90°	
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE	
9492902 ●	6W	3000K	413Lm	L 11.1 W 2.5 H 9.4	220-240Vac	On/Off	
9492903 ○	6W	3000K	468Lm	L 11.1 W 2.5 H 9.4	220-240Vac	On/Off	
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE	
9492904 ●	12W	3000K	843Lm	L 22 W 2.5 H 9.4	48Vdc	On/Off	
9492905 ○	12W	3000K	897Lm	L 22 W 2.5 H 9.4	48Vdc	On/Off	
9492920 ●	12W	3000K	843Lm	L 22 W 2.5 H 9.4	48Vdc	Dali	
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE	
9492890 ●	6W	3000K	379Lm	D 3.1 H 6.7	220-240Vac	On/Off	
9492891 ○	6W	3000K	443Lm	D 3.1 H 6.7	220-240Vac	On/Off	
9492915 ●	6W	3000K	379Lm	D 3.1 H 6.7	48Vdc	Dali	

						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492898 ●	14W	3000K	927Lm	D 6 H 17.4	48Vdc	On/Off
9492918 ●	14W	3000K	927Lm	D 6 H 17.4	48Vdc	Dali
9492899 ○	14W	3000K	1111Lm	D 6 H 17.4	48Vdc	On/Off
9492900 ●	23W	3000K	1430Lm	D 6 H 22.4	48Vdc	On/Off
9492919 ●	23W	3000K	1430Lm	D 6 H 22.4	48Vdc	Dali
9492901 ○	23W	3000K	1500Lm	D 6 H 22.4	48Vdc	On/Off




  						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492896 ●	8W	3000K	459Lm	D 4 H 18.4	220-240Vac	On/Off
9492897 ○	8W	3000K	509Lm	D 4 H 18.4	220-240Vac	On/Off




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492917	● 8W	3000K	459Lm	D 4 H 18.4	48Vdc	Dali




		• UGR<4					
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE	
9492906	● 21W	3000K	2016Lm	L 108.4 W 7 H 150	48Vdc	On/Off	



						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492907 ●	21W	3000K	868Lm	L 108.4 W 7 H 150	48Vdc	On/Off




						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492910 ○	5W	3000K	382Lm	D 5 H 150	220-240Vac	On/Off
9492911 ●	5W	3000K	331Lm	D 5 H 150	220-240Vac	On/Off




						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492913 ●	8W	3000K	511Lm	D 4 H 150	220-240Vac	On/Off
9492912 ○	8W	3000K	565Lm	D 4 H 150	220-240Vac	On/Off



						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492908 ●	10W	3000K	467Lm	L 125.2 W 1.5 H 150	48Vdc	On/Off



						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9492909 ●	10W	3000K	467Lm	D 5 H 420	48Vdc	On/Off




LINEAR
LIGHTING
366----379

Pages

Our **linear product range** includes **smart and modular lighting systems** designed for seamless integration across various applications. Available in **recessed, surface-mounted, and suspended versions**, it features **corner connectors** for continuous, uniform lines of light. With its **sleek, minimalist design**, the range delivers both functional and architectural impact—ideal for modern interiors seeking **flexibility, clean aesthetics, and precise illumination**.

GENT
LINA

Page 368-371
Page 372-379

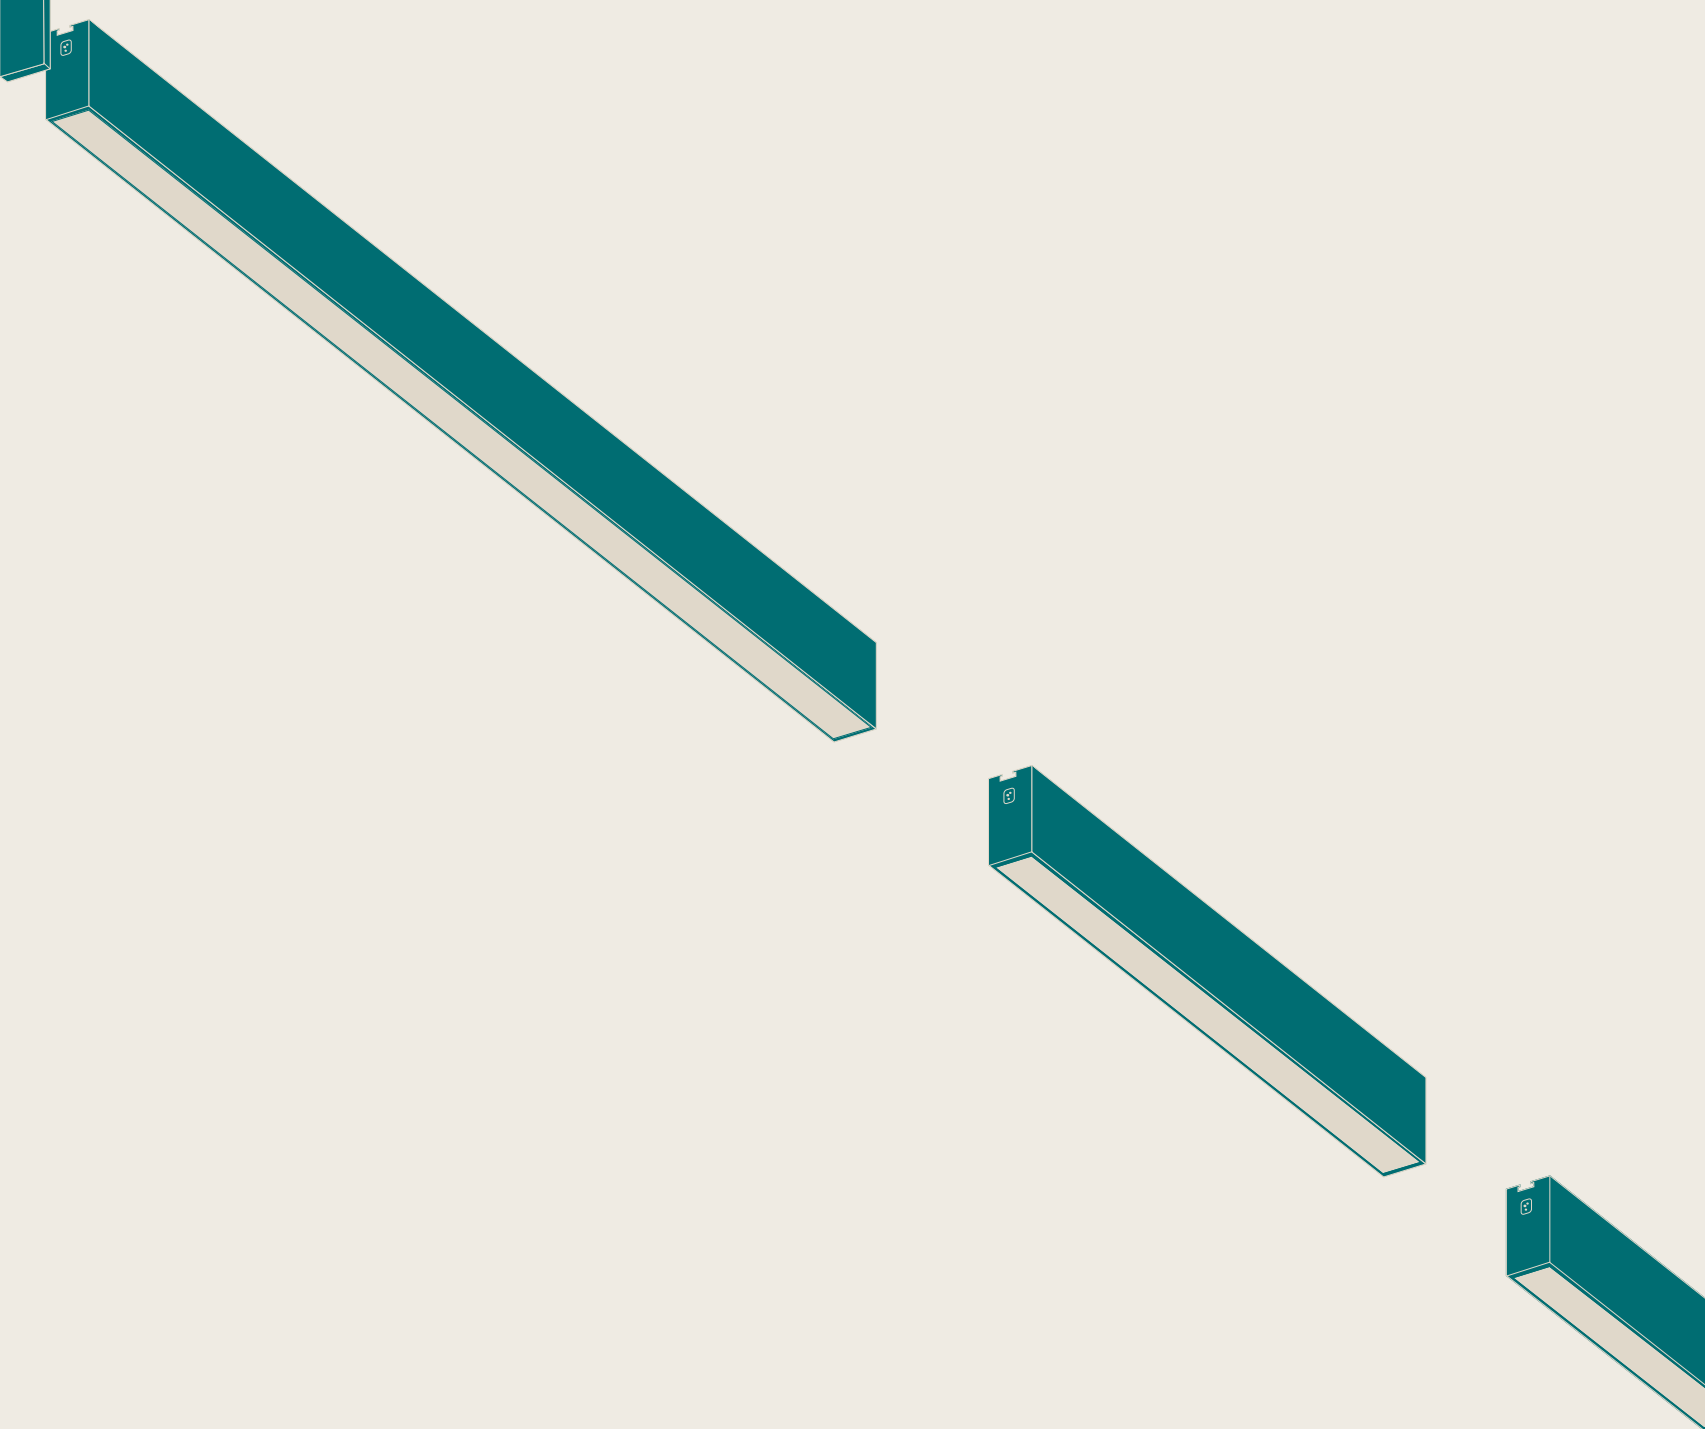




GENT
LINEAR LIGHTING


The **Gent Linear System** is a **versatile lighting solution** available in **surface-mounted, recessed, and suspended versions**, offering seamless integration into a wide range of architectural settings. With a **sleek, modern design** and finishes in **black and white**, Gent combines clean aesthetics with high performance—ideal for professional environments, retail spaces, and contemporary interiors requiring both **style and functionality**.

Gent

SURFACE - PENDANT APPLICATION



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8254429 ○	40W	3000K	2480Lm	L 120 W 3.8 H 7	220-240Vac	On/Off Included
8254401 ○	40W	4000K	2613Lm	L 120 W 3.8 H 7	220-240Vac	
8254430 ●	40W	3000K	2480Lm	L 120 W 3.8 H 7	220-240Vac	
8254402 ●	40W	4000K	2613Lm	L 120 W 3.8 H 7	220-240Vac	



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8254441 ○	20W	3000K	1250Lm	L 32.2 W 3.8 H 7	220-240Vac	On/Off Included
8254443 ○	20W	4000K	1380Lm	L 32.2 W 3.8 H 7	220-240Vac	
8254442 ●	20W	3000K	1250Lm	L 32.2 W 3.8 H 7	220-240Vac	
8254444 ●	20W	4000K	1380Lm	L 32.2 W 3.8 H 7	220-240Vac	



ACCESSORIES

	CODE	DESCRIPTION
	8254407 ○	End Cap
	8254406 ●	
	8254425 ○	Connector for Two Linear Profiles
	8254410 B ●	Accessories for Pendant Application
	8254410 W ○	
	8254411 ○	Screws for Ceiling Application






LINA
LINEAR LIGHTING





Lina is a **modular linear lighting system** designed for maximum versatility, offering **unlimited configuration possibilities** to suit a wide range of applications. Available in **suspended**, **recessed**, and **surface-mounted versions**, Lina comes in both **prismatic diffuser** and **COB optic** options for tailored light distribution. The **smart version** features **adjustable suspension** and an integrated **motion sensor**, combining intelligent functionality with a sleek, architectural design—ideal for modern workspaces, retail, and public environments.

Lina

SURFACE MOUNTED ACCESSORIES USAGE

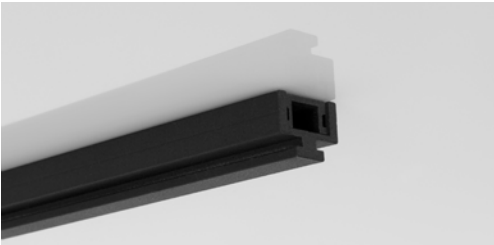


TRACKS & ACCESSORIES





	CODE		DESCRIPTION	DIMENSIONS (cm)
	9540110	●	26.5 cm	
	9540120	●	53 cm	
	9540130	●	119 cm	
	9540100	●	Cable	
	9988120	●	Connector	
	9540140	●	Corner	
	9988110	●	End Cap	
	9988100	●	Energy End Cap	

Lina

RECESS APPLICATION

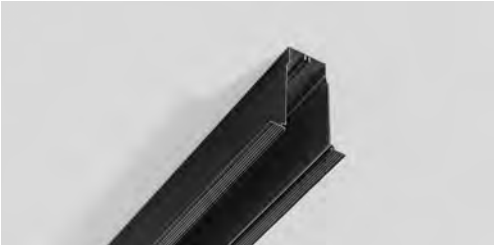

TRACKS & ACCESSORIES




	CODE		DESCRIPTION	DIMENSIONS (cm)
	9988200	●	Installation Rail with Cut-Out 4.2 cm	
	9988204	●	Connection Bar	
	9988205	●	Connection Bar	
	9988206	●	Connection Bar	
	9988208	●	Connector	
	9988201	●	H 90° Corner Connector	
	9988203	●	End Cap for Lights	
	9988202	●	End Cap for 9988200	
	9988207	●	Tool Kit for Removing Lamps for 9988200	


Lina

SUSPEND ACCESSORIES USAGE




TRACKS & ACCESSORIES

	CODE		DESCRIPTION	DIMENSIONS (cm)
	9540170	●	Used For Suspend Wire To Start Plug & Power	
	9540150	●	Used For Suspend Rod to Start Plug & Power Adjustable	
	9540180	●	Hanging Element	
	9540160	●	Hanging Element	
	9988120	●	Connector	
	9540140	●	Corner	
	9988110	●	End Cap	

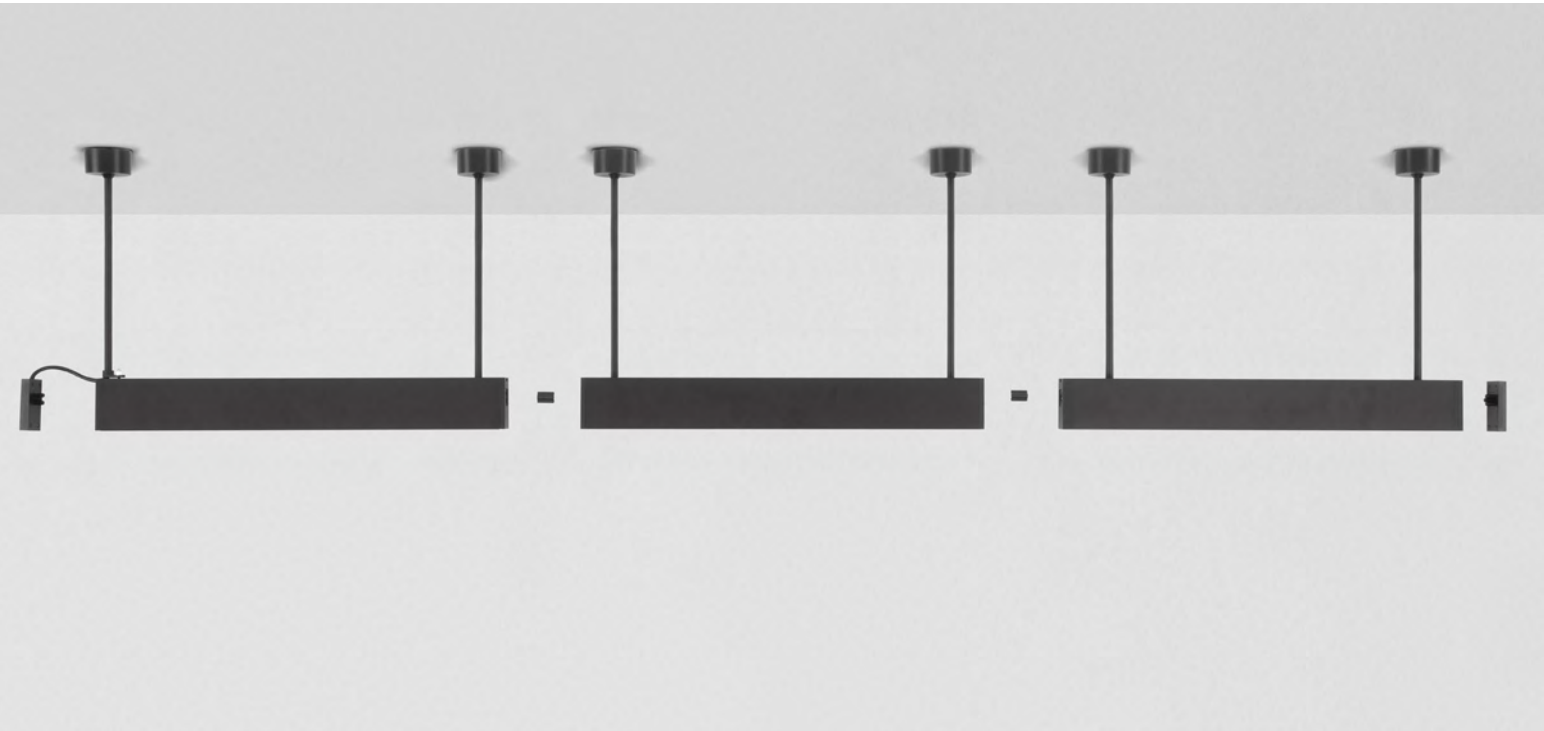








CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9970200	● 10W	3000K	700Lm	L 27.8 W 3.5 H 7	220-240Vac	On/Off Included
9080150	● 10W	4000K	700Lm	L 27.8 W 3.5 H 7	220-240Vac	
9970210	● 20W	3000K	1400Lm	L 54.5 W 3.5 H 7	220-240Vac	
9080160	● 20W	4000K	1400Lm	L 54.5 W 3.5 H 7	220-240Vac	
9970220	● 40W	3000K	2800Lm	L 120.7 W 3.5 H 7	220-240Vac	
9080170	● 40W	4000K	2800Lm	L 120.7 W 3.5 H 7	220-240Vac	













CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9970102	● 10W	3000K	700Lm	L 27.8 W 3.5 H 7	220-240Vac	On/Off Included
9080120	● 10W	4000K	700Lm	L 27.8 W 3.5 H 7	220-240Vac	
9970103	● 20W	3000K	1400Lm	L 54.5 W 3.5 H 7	220-240Vac	
9080130	● 20W	4000K	1400Lm	L 54.5 W 3.5 H 7	220-240Vac	
9970104	● 40W	3000K	2800Lm	L 120.7 W 3.5 H 7	220-240Vac	
9080140	● 40W	4000K	2800Lm	L 120.7 W 3.5 H 7	220-240Vac	










Lina

COMPACT

LIGHTING MODULES








CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9970100	● 40W	3000K	2800Lm	L 120.7 W 3.5 H 100	220-240Vac	On/Off Included
9080100	● 40W	4000K	2800Lm	L 120.7 W 3.5 H 100	220-240Vac	













CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9970101	● 40W	3000K	2800Lm	L 120.7 W 3.5 H 100	220-240Vac	On/Off Included
9080110	● 40W	4000K	2800Lm	L 120.7 W 3.5 H 100	220-240Vac	







ACCESSORIES


Hanging Element




9540160



Smart Lina



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9063609 ●	16W	3000K	960Lm	L 125 W 3.5 H 120	220-240Vac	Motion Sensor
9063610 ●	16W	4000K	960Lm	L 125 W 3.5 H 120	220-240Vac	
9063611 ●	25W	3000K	1625Lm	L 152 W 3.5 H 120	220-240Vac	
9063612 ●	25W	4000K	1625Lm	L 152 W 3.5 H 120	220-240Vac	



ADJUSTABLE SUSPENSION FEATURE

The **adjustable suspension** feature allows for **easy and precise height adjustment** of the fixture during installation or at any time after, ensuring optimal positioning and alignment. This user-friendly mechanism adds flexibility and convenience, making it ideal for spaces where ceiling heights or lighting needs may vary.

GESTURE-CONTROLLED MOTION SENSOR

The system features a **gesture-controlled motion sensor** that allows users to **turn the light on or off with a simple wave of the hand**. This touch-free functionality enhances **user convenience**, making it ideal for modern interiors, workspaces, and environments where easy, contactless control is preferred.



GESTURE-CONTROLLED DIMMING FUNCTION

The system includes a **gesture control dimming function**, allowing users to **adjust brightness levels with a smooth hand movement**. Simply wave to turn the light on or off, and hold your hand beneath the sensor to **gradually dim or brighten the light**. This intuitive, touch-free control offers a seamless and hygienic user experience—perfect for modern residential, office, or hospitality settings.


HIGH VOLTAGE TRACKS

380----393

Pages

Our **high voltage track** range (220–240V) is designed for **reliable, flexible, and scalable lighting solutions** in both residential and commercial settings. Available in **several versions**, these tracks support a wide variety of **spotlights and fixture types**, allowing for multi-circuit control in larger, more complex installations. With **durable construction, clean design**, and finishes in **black or white**, the range is ideal for applications that require **versatility, ease of installation**, and **long-term performance**.

4 WIRES Page 382-391
2 WIRES Page 392-393

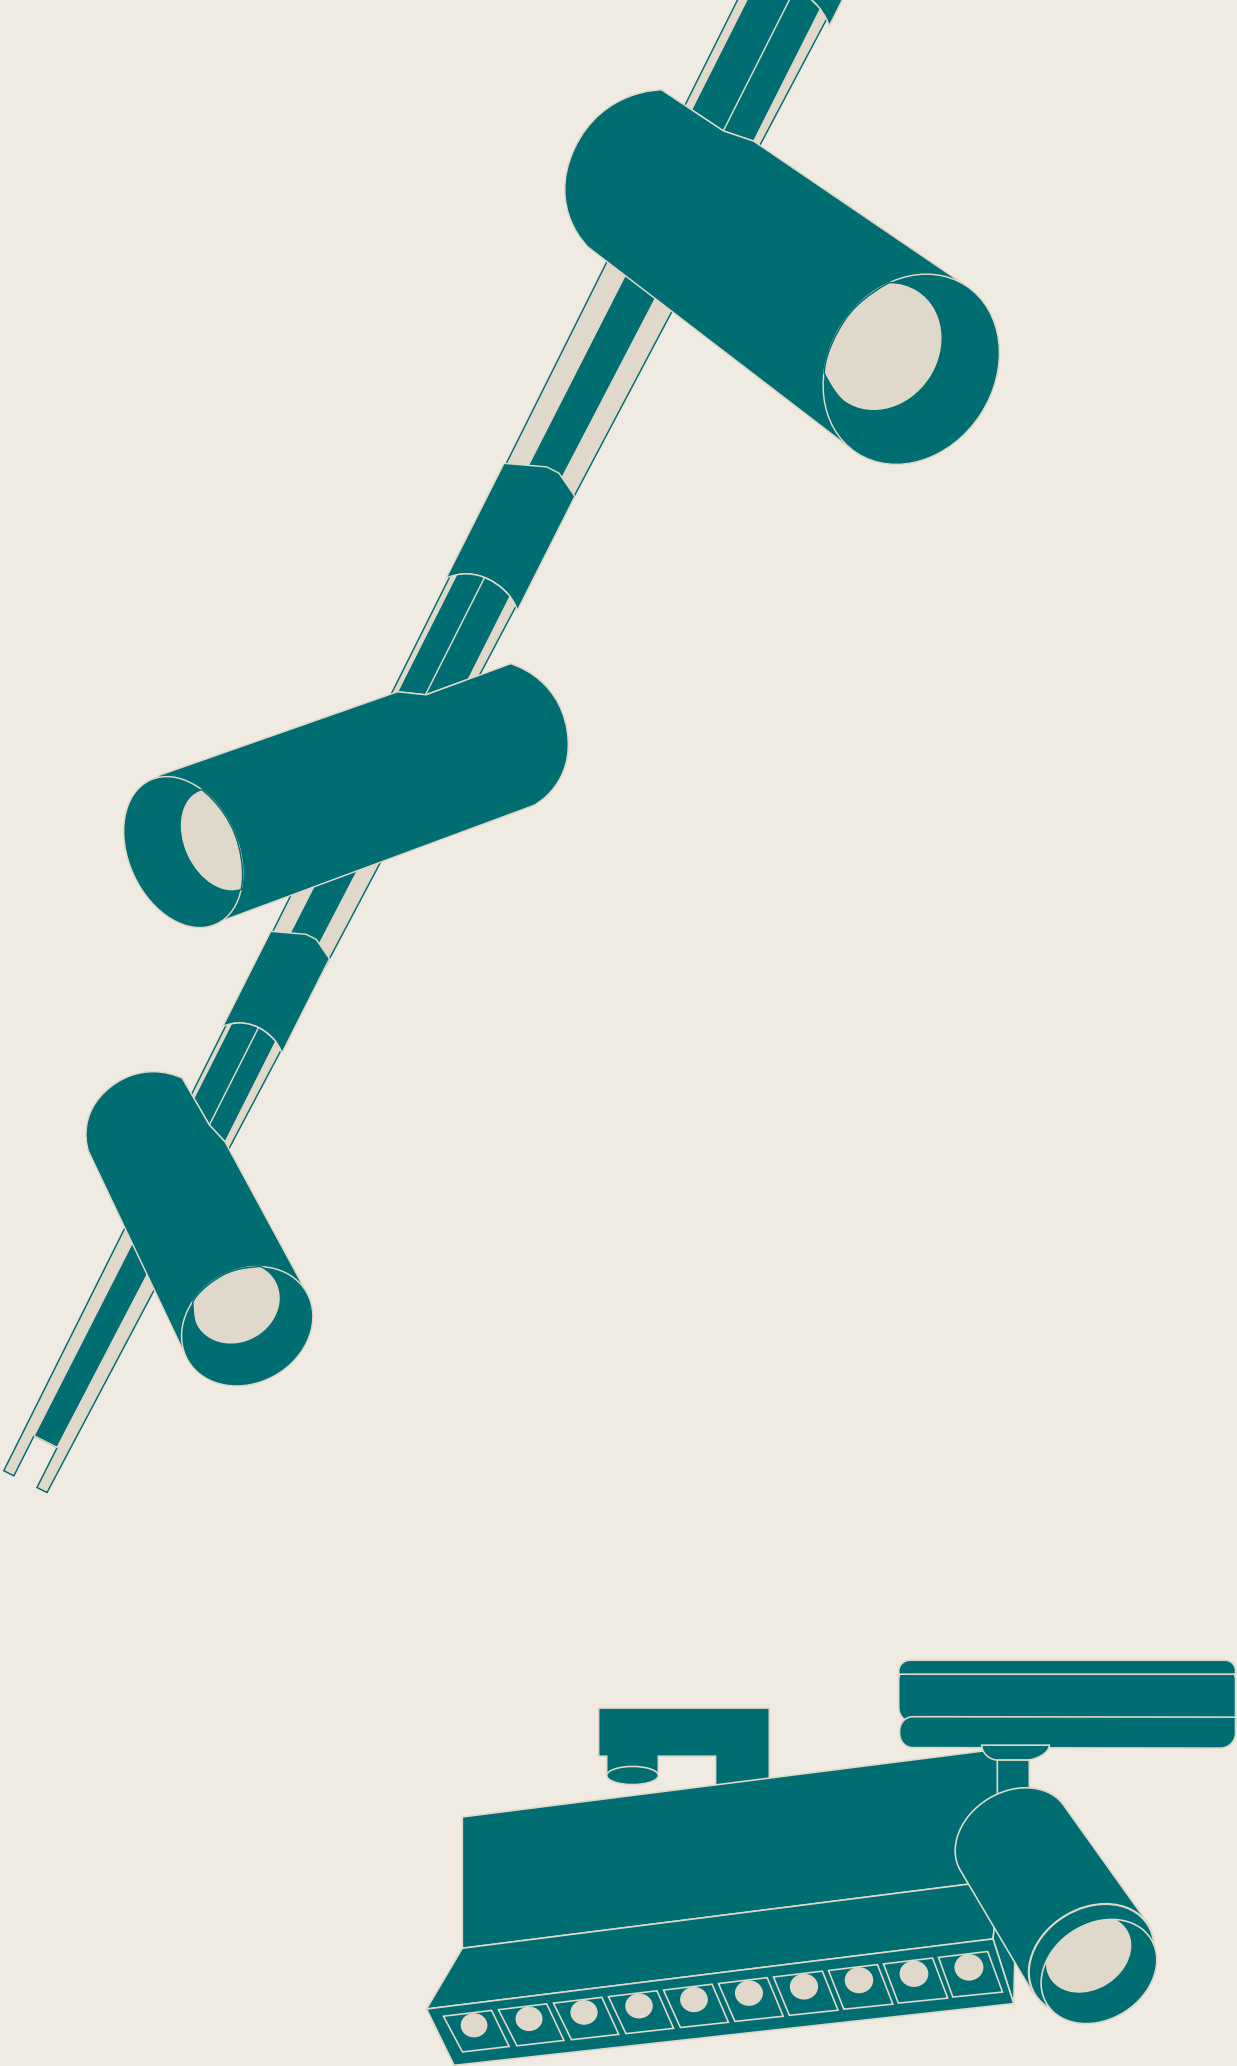



4 Wires & 2 Wires Track
HIGH VOLTAGE TRACKS

Our product range includes **two popular 220–240V AC track systems** tailored to different application needs. The **2-wire version** is ideal for **residential use**, offering simplicity and ease of installation, while the **4-wire version** is designed for **commercial projects**, supporting **three-circuit functionality** for greater control and flexibility. Both systems are available in **black and white finishes**, and support a **variety of wattages and fixture types**, making them suitable for a wide range of lighting layouts and design requirements.

4 Wires Track Rails

TRACKS & ACCESSORIES

	CODE	DESCRIPTION
CONNECTORS	 9193431 ●	4 wires track rail 2 m
	9193421 ○	
	 9193434 ●	Power Feed 220-250V 16A
	 9193424 ○	
	9193432 ●	Internal Linear Connector
POWER FEED OPTIONS	 9193422 ○	
	9193435 ●	Middle Power Supply Connector 16A
	9193425 ○	
	 9193437 ●	L Power Supply Connector 16A
	 9193427 ○	
	9193436 ●	T Power Supply Connector 16A
	 9193426 ○	
SUSPENSION ACCESSORIES	9193433 ●	End Cap
	9193423 ○	
	 9193457 ●	Suspension Mount (18cm)
	9193447 ○	
	 9193439 ●	Suspension Kit 2m Wire
	9193429 ○	
	 9193458 ●	Suspension Kit 2m Wire
	9193448 ○	

Lavish

PRO

- CRI 97
- Dip switch adaptor




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9123141 ●	20W	3000K	1400Lm	D 6 H 12	220-240Vac	On/Off Included
9123142 ○	20W	3000K	1400Lm	D 6 H 12	220-240Vac	



Kors

PRO

- Adj. Beam Angle 15°-36°




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9913071 ○	20W	3000K	1055Lm	D 6 H 17	220-240Vac	On/Off Included
9913072 ●	20W	3000K	1055Lm	D 6 H 17	220-240Vac	
9913073 ○	38W	3000K	3374Lm	D 8.5 H 18	220-240Vac	
9913074 ●	38W	3000K	3374Lm	D 8.5 H 18	220-240Vac	



Monvel

PRO

- Adj. Beam Angle 15°-36°



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9118151 ○	15W	3000K	943Lm	D 6 H 15	220-240Vac	On/Off Included
9118152 ●	15W	3000K	943Lm	D 6 H 15	220-240Vac	
9062301 ○	30W	3000K	2298Lm	D 6 H 20	220-240Vac	
9062302 ●	30W	3000K	2298Lm	D 6 H 20	220-240Vac	



West

PRO



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9011941	○	10W	3000K	950Lm	D 4 H 13	220-240Vac	On/Off Included
9011942	●	10W	3000K	950Lm	D 4 H 13	220-240Vac	
9011951	○	20W	3000K	1522Lm	D 6 H 12	220-240Vac	
9011952	●	20W	3000K	1522Lm	D 6 H 12	220-240Vac	



Herm

ESSENTIAL



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
7770407	○	12W	3000K	886Lm	D 6.1 H 15.5	220-240Vac	On/Off Included
8770411	○	12W	4000K	886Lm	D 6.1 H 15.5	220-240Vac	
7770408	●	12W	3000K	886Lm	D 6.1 H 15.5	220-240Vac	
8770412	●	12W	4000K	886Lm	D 6.1 H 15.5	220-240Vac	



Eurika

ESSENTIAL




CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9070156	●	10W	3000K	647Lm	D 5.5 H 23.5	220-240Vac	On/Off Included
9580629	●	10W	4000K	710Lm	D 5.5 H 23.5	220-240Vac	
9070159	○	10W	3000K	647Lm	D 5.5 H 23.5	220-240Vac	
9580632	○	10W	4000K	710Lm	D 5.5 H 23.5	220-240Vac	
9070157	●	20W	3000K	1371Lm	D 6.5 H 25.6	220-240Vac	
9580630	●	20W	4000K	1428Lm	D 6.5 H 25.6	220-240Vac	
9070160	○	20W	3000K	1371Lm	D 6.5 H 25.6	220-240Vac	
9580633	○	20W	4000K	1428Lm	D 6.5 H 25.6	220-240Vac	
9070158	●	30W	3000K	2255Lm	D 8.5 H 22	220-240Vac	
9580631	●	30W	4000K	2348Lm	D 8.5 H 22	220-240Vac	
9070161	○	30W	3000K	2255Lm	D 8.5 H 22	220-240Vac	
9580634	○	30W	4000K	2348Lm	D 8.5 H 22	220-240Vac	



Wang

PRO



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9123132	○	12W	3000K	778Lm	D 4 H 19	220-240Vac	On/Off Included
9123131	●	12W	3000K	778Lm	D 4 H 19	220-240Vac	



Kamala

ESSENTIAL



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9070136	○	15W	3000K	1044Lm	L 27.5 W 3.9 H 18.5	220-240Vac	On/Off Included
9070135	●	15W	3000K	1044Lm	L 27.5 W 3.9 H 18.5	220-240Vac	



Roler

PRO

- Dip Switch




CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9011861	○	20W	3000K	1826Lm	D 9.5 W 4.2	220-240Vac	On/Off Included
9011862	●	20W	3000K	1826Lm	D 9.5 W 4.2	220-240Vac	



CODE		WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9011871	○	20W	3000K	1474Lm	L 9.5 W 4.2 H 9.5	220-240Vac	On/Off Included
9011872	●	20W	3000K	1474Lm	L 9.5 W 4.2 H 9.5	220-240Vac	






Paris

CODE
9011851 ○ 9011852 ●

DIMENSIONS (cm)
D 5.6 H 10

WATT
Max 10W

VOLTAGE
220-240Vac



Pongo

CODE
9113231 ○ 9460985 ●

DIMENSIONS (cm)
D 5.4 H 13

WATT
Max 10W

VOLTAGE
220-240Vac




CODE
9460980 ●

DIMENSIONS (cm)
D 5.6 H 9.5

WATT
35W

VOLTAGE
220-240Vac




CODE
9010219 ●

DIMENSIONS (cm)
D 5.4 H 64.3

WATT
35W

VOLTAGE
220-240Vac



Thomas

CODE
9030430 ●

DIMENSIONS (cm)
D 11.9 W 3.2 H 17

WATT
35W

VOLTAGE
220-240Vac



2 Wires Track Rails

TRACKS & ACCESSORIES

	CODE	DESCRIPTION
	9193454 ●	2 Wires Track Rail 2m, 16A (End cap & Power Connector Included)
	9193444 ○	
	9193455 ●	Internal Linear Connector
	9193445 ○	
	9193456 ●	L Connector
	9193446 ○	



Flix

CODE
9011455 ○ 9011454 ● D 4 H 10

DIMENSIONS (cm)

WATT
Max 10W

VOLTAGE
220-240Vac



Sint

CODE
9712001 ○ 9712002 ● D 6 H 10.5

DIMENSIONS (cm)

WATT
Max 10W

VOLTAGE
220-240Vac



Diss

CODE
8008801 ○ 8008802 ● D 6 H 10

DIMENSIONS (cm)

WATT
Max 10W

VOLTAGE
220-240Vac




FLOOR
LAMPS
394----401

Pages

Our **floor lamp range** offers a selection of **linear floor lamps** and **photobiological-type fixtures**, combining functionality with modern design. Available in **black or white finishes**, the range includes models with **asymmetric lenses** for directional lighting or **prismatic diffusers** for uniform light distribution. Many options feature **integrated motion sensors** for energy-efficient, hands-free operation—making them ideal for offices, workspaces, or residential environments that demand both **performance and style**.


BIOLIGHT
READER
GAL

Page 396-397
Page 398-399, 401
Page 400

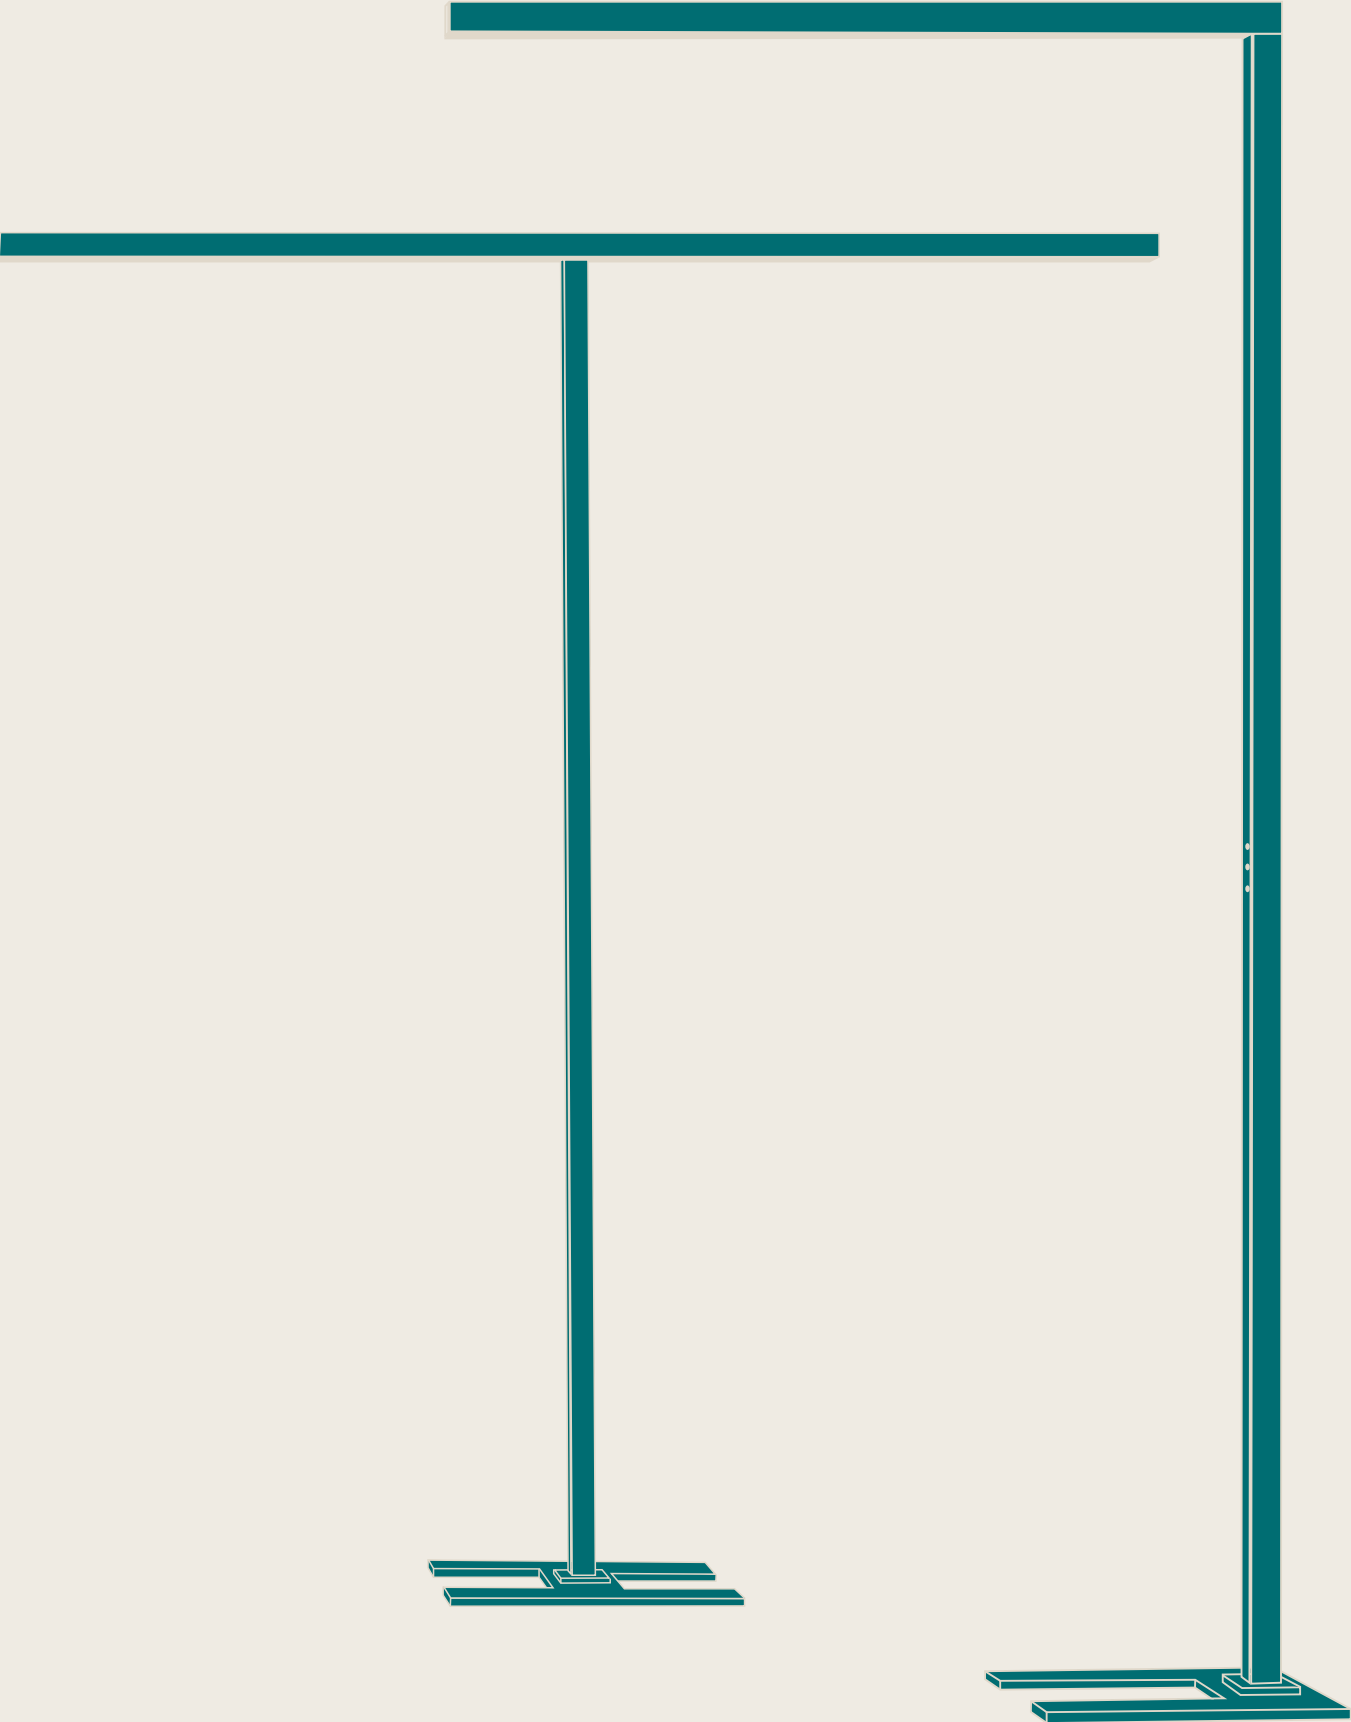


Biolight

PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9416978	77W	4000K	2958Lm	L 32 W 61 H 198	220-240Vac	Knob Switch Motion & Light Sensor Auto Dimming



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9416977	19W	4000K	999Lm	L 27 W 16 H 58	220-240Vac	Auto Dimming



Knob Switch

The knob switch allows easy dimming of the light, adjusting brightness smoothly between 10% to 100%. Simply turn the knob clockwise to increase brightness or counterclockwise to dim the light to your desired level. This intuitive control provides customizable lighting for any setting, from soft ambient glow to full illumination.

Motion Sensor

BIOLIGHT features a built-in motion sensor with a 2-meter range, automatically turning on when movement is detected and switching off after 5 minutes of inactivity. This smart function enhances energy efficiency and convenience, ensuring handsfree operation while preventing unnecessary power consumption. Perfect for homes and offices, it provides seamless, automated lighting for any space.

AUTO-DIMMING FUNCTION



Equipped with an advanced light sensor, this lamp automatically adjusts its brightness based on the surrounding light levels, ensuring optimal illumination at all times. Whether you're reading in a dimly lit room or working in a space flooded with natural light, the lamp intuitively dims or brightens to maintain a comfortable and energy-efficient ambiance. Its sleek and modern design complements any interior, while the intuitive automation enhances convenience, eliminating the need for manual adjustments. Perfect for home or office use, the BIOLIGHT provides the perfect balance of functionality, style, and energy savings.





Reader

PRO

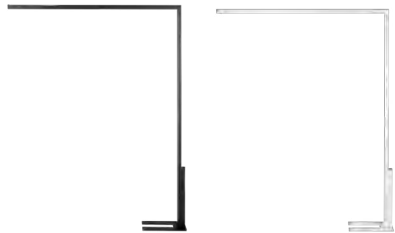

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9060291 ●	60W	4000K	6900Lm	L 160.5 W 2.8 H 206.5	220-240Vac	Motion Sensor
9060292 ○	60W	4000K	6900Lm	L 160.5 W 2.8 H 206.5	220-240Vac	Auto Dimming



UP & DOWN

Indirect light are designed to provide a **soft, ambient glow** by directing light upward, creating a comfortable and glare-free atmosphere.

MOTION SENSOR & AUTO BRIGHT ADJUSTMENT

Our advanced **floor lamp** combines smart functionality with sleek design, featuring an integrated **motion sensor** and **auto-brightness adjustment** based on ambient light levels for optimal energy efficiency and user comfort. It allows you to **control direct and indirect lighting separately**, with independent **on/off** and **dimming functions**—providing customizable illumination tailored to your needs throughout the day. Ideal for modern offices, hospitality, and residential spaces.



ASYMETRIC LENSES

This **floor lamp** is designed with **asymmetric lenses**, delivering **precise, focused illumination** across multiple **workstations** without creating glare or light spill. Ideal for shared office environments, its asymmetric optics direct the light exactly where it's needed—enhancing **visual comfort** and **task efficiency** while maintaining a clean, unobtrusive appearance.



Gal
ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9008815 ●	Up:45W, Down: 15W	3000K	Up:4050Lm, Down:494Lm	L 160 W 3.5 H 200	220-240Vac	Touch Dimmable
9008801 ●	Up:30W, Down: 10W	3000K	Up:2700Lm, Down:900Lm	L 95.6 W 3.5 H 200	220-240Vac	



Reader
ESSENTIAL




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9060289 ●	51W	4000K	5520Lm	L 123.5 W 2.8 H 206.5	220-240Vac	-
9060290 ○	51W	4000K	5520Lm	L 123.5 W 2.8 H 206.5	220-240Vac	

STEPLIGHTS
402---- 421

Pages

Our **steplight range** offers a wide variety of options in **different materials, shapes, and sizes** to suit any architectural style or functional requirement. From **round and square designs** to **rectangular and linear forms**, these fixtures are available in **aluminum, stainless steel, and polycarbonate**, ensuring durability and visual harmony in both **indoor and outdoor applications**. Designed for **safety, comfort, and aesthetic appeal**, our steplights provide effective low-level illumination for stairs, corridors, and pathways.

STEP LIGHTS	Page 404-411
GYPSUM	Page 412-417
INGROUND	Page 418-421

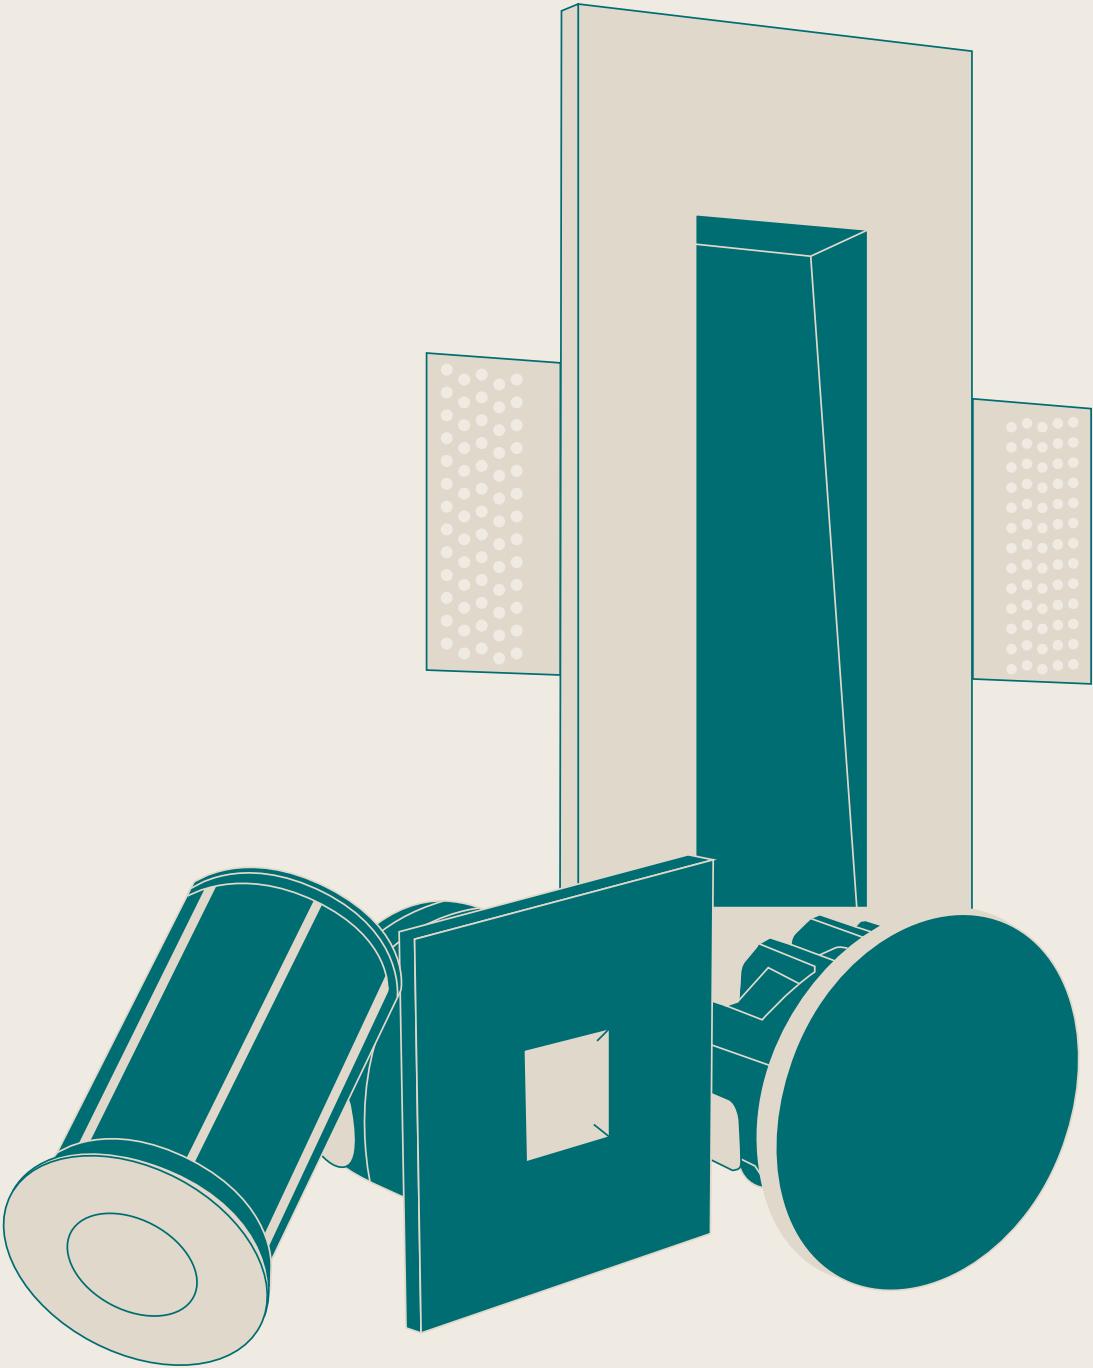



STEPLIGHTS

Our **steplight range** is available in two distinct series—**PRO** and **Essential**—to cover a wide spectrum of project needs. The **PRO series** offers **high-performance solutions** with advanced optics, premium materials, and superior durability, ideal for demanding commercial or architectural applications. The **Essential series** provides **cost-effective options** without compromising on quality, making it perfect for residential or standard-use projects. Both series include a variety of **shapes, sizes, and materials**, ensuring the right solution for every application.

Bang
PRO





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
8038401 ○	1W	3000K	60Lm	D 3.7 W 5.3	3Vdc	350 mA	On/Off 9020170





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
8039001 ○	1W	3000K	60Lm	D 3.7 W 5.3	3Vdc	350 mA	On/Off 9020170





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
8038801 ○	1W	3000K	60Lm	D 3.7 W 5.3	3Vdc	350 mA	On/Off 9020170




Passaggio


PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
8090801 ○	1W	3000K	70Lm	L 3.7 W 2.2 H 3.7	3Vdc	350 mA	On/Off 9020170
9045418 ●	1W	3000K	70Lm	L 3.7 W 2.2 H 3.7	3Vdc	350 mA	

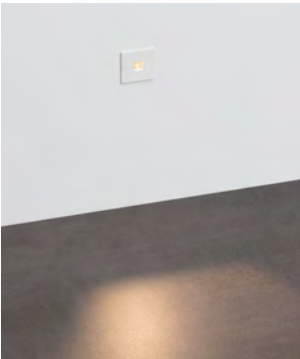

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9045514 ○	1W	3000K	70Lm	L 3.7 W 2.2 H 3.7	3Vdc	350 mA	On/Off 9020170



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
8058001 ○	1W	3000K	70Lm	L 3.9 W 2.1 H 3.9	3Vdc	350 mA	On/Off 9020170
9031616 ○	1W	3000K	70Lm	D 3.9 W 2.1	3Vdc	350 mA	




Natal

PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
6800201 ●	3W	3000K	5Lm	D 4.4 W 4.3	220-240Vac	-	On/Off Included
6800202 ○	3W	3000K	5Lm	D 4.4 W 4.3	220-240Vac	-	



Atrium

ESSENTIAL



OPTIONAL ACCESSORIES

BOX FOR STEPLIGHTS



3.9" 7.5"
9844049

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232243 ○	3W	3000K	41Lm	L 4.2 W 2.6 H 4.2	220-240Vac	-	On/Off Included Dali 9844145



Atrium

ESSENTIAL

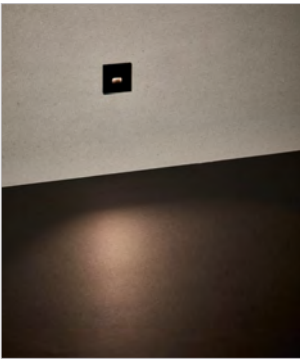

OPTIONAL ACCESSORIES

BOX FOR STEPLIGHTS


3.9" 7.5"
9844049

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844037 ○	3W	2700K	40Lm	L 4.2 W 2.6 H 4.2	220-240Vac	-	On/Off Included Dali 9844145
9844038 ●	3W	2700K	28Lm	L 4.2 W 2.6 H 4.2	220-240Vac	-	



Atrium

ESSENTIAL

STEPLIGHTS

OPTIONAL ACCESSORIES


BOX FOR STEPLIGHTS



7.5
3.9
9844049



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844039 ○	3W	2700K	42Lm	L 4.2 W 2.6 H 4.2	220-240Vac	-	On/Off Included
9844040 ●	3W	2700K	42Lm	L 4.2 W 2.6 H 4.2	220-240Vac	-	Dali 9844145



OPTIONAL ACCESSORIES



BOX FOR STEPLIGHTS



7.5
3.9
9844049



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844041 ○	3W	2700K	41Lm	L 4.2 W 2.6 H 4.2	220-240Vac	-	On/Off Included
9844042 ●	3W	2700K	33Lm	L 4.2 W 2.6 H 4.2	220-240Vac	-	Dali 9844145




OPTIONAL ACCESSORIES


BOX FOR STEPLIGHTS



7.5
3.9
9844049

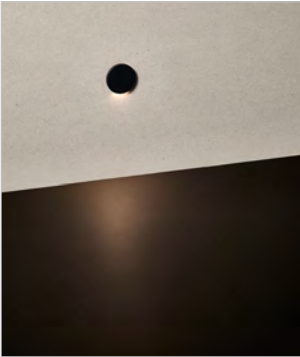

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844043 ○	3W	2700K	5Lm	D 4.2 W 2.6	220-240Vac	-	On/Off Included
9844044 ●	3W	2700K	5Lm	D 4.2 W 2.6	220-240Vac	-	Dali 9844145



STEPLIGHTS

OPTIONAL ACCESSORIES

BOX FOR STEPLIGHTS



7.5
3.9
9844049



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844045 ○	3W	2700K	59Lm	D 4.2 W 2.6	220-240Vac	-	On/Off Included
9844046 ●	3W	2700K	41Lm	D 4.2 W 2.6	220-240Vac	-	Dali 9844145




OPTIONAL ACCESSORIES


BOX FOR STEPLIGHTS



7.5
3.9
9844049

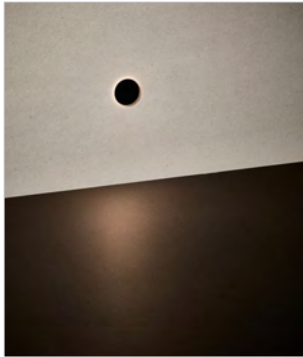

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9844047 ○	3W	2700K	20Lm	D 4.2 W 2.6	220-240Vac	-	On/Off Included
9844048 ●	3W	2700K	20Lm	D 4.2 W 2.6	220-240Vac	-	Dali 9844145



OPTIONAL ACCESSORIES



BOX FOR STEPLIGHTS



7.5
3.9
9844049




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9232242 ○	3W	3000K	33Lm	D 4.2 W 2.6	220-240Vac	-	On/Off Included
							Dali 9844145





Cirocco

ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9600217	1W	3000K	20Lm	L 14.2 W 4.5 H 17	220-240Vac	-	On/Off 9889134

IP20


2 YEARS

>20.000 HOURS

IK03

Gypsum

DRIVER EXCLUDED



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
6600801	1W	3000K	20Lm	L 14.2 W 4.5 H 17	220-240Vac	-	On/Off 9889134

IP20

2 YEARS

>20.000 HOURS

IK03


Gypsum

DRIVER EXCLUDED

OPTIONAL ACCESSORIES					
	CODE		DESCRIPTION		
	9889134		Driver 2 Watt Waiberlon, Input: 220-240Vac 50/60Hz Output: 3-4Vdc, 500mA Not Dimmable		
	CODE	WATT	CCT	FLUX	VOLTAGE
	9879100	1W	2700K	20Lm	3Vdc
	9879999	1W	3000K	20Lm	3Vdc

Eurona

ESSENTIAL




LED VERSION						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9879389 ○	1W	3000K	20Lm	L 8 W 4.8 H 16.5	220-240Vac	On/Off Included

GU VERSION				
CODE	WATT	DIMENSIONS (cm)	VOLTAGE	
9879388 ○	Max 10W	L 8 W 4.8 H 16.5	12Vdc	




CODE	WATT	DIMENSIONS (cm)	VOLTAGE	
66018101 ○	Max 10W	L 8 W 4.8 H 17	12Vdc	



LED VERSION						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9879391 ○	1W	3000K	20Lm	L 10.7 W 5 H 24.5	220-240Vac	On/Off Included

GU VERSION			
CODE	WATT	DIMENSIONS (cm)	VOLTAGE
9879390 ○	Max 10W	L 10.7 W 5 H 24.5	12Vdc




LED VERSION						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
7600601 ○	1W	3000K	20Lm	L 10.8 W 5.3 H 24.5	220-240Vac	On/Off 9889134

GU VERSION			
CODE	WATT	DIMENSIONS (cm)	VOLTAGE
5600601 ○	Max 10W	L 10.8 W 5.3 H 24.5	12Vdc




Cirocco



ESSENTIAL




CODE	WATT	DIMENSIONS (cm)	VOLTAGE				
9602615 ○	Max 10W	L 21 W 8 H 25	12Vdc				



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9879106 ○	1W	3000K	20Lm	L 10 W 4.7 H 10	220-240Vac	-	On/Off Included




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
61886001 ○	1W	3000K	20Lm	L 10 W 4.7 H 10	220-240Vac	-	On/Off 9889134



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{OUT}	DRIVER
9188626 ○	3W	3000K	41Lm	L 12 W 5.5 H 18	220-240Vac	-	On/Off 9889134



Bang
PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9019213	● 1W	3000K	60Lm	D 3.7 H 5.3	3Vdc	350 mA	On/Off 9020170
9019212	● 1W	3000K	60Lm	D 3.7 H 5.3	3Vdc	350 mA	



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9203113	● 1W	3000K	60Lm	D 4.2 H 9	220-240Vac	-	On/Off Included



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9203111	● 1W	3000K	60Lm	D 4.2 H 9	220-240Vac	-	On/Off Included




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	I _{out}	DRIVER
9203112	● 1W	3000K	60Lm	D 4.2 H 9	220-240Vac	-	On/Off Included



Geli

PRO

- SS316

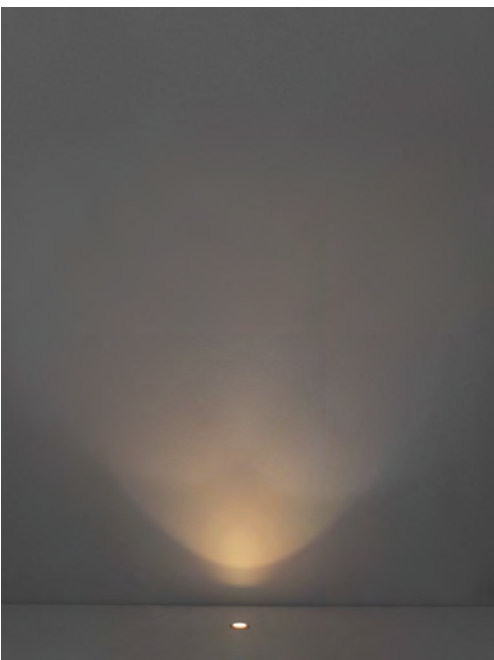

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9203114	1W	3000K	9Lm	D 3 H 5.2	24Vdc	On/Off Included



Codi

PRO

- SS316



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9203116	3W	3000K	147Lm	D 6.2 H 9	110-240Vac	On/Off Included



*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

Kem

PRO

- SS316
- IP68



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9203117	2W	3000K	7Lm	D 6.2 H 11	110-240Vac	On/Off Included



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9203118	2W	3000K	12Lm	D 6.2 H 11	110-240Vac	On/Off Included




FAÇADE & ACCENT LIGHTING

422----437

Pages

Our **façade and accent lighting range** is designed to enhance architectural details and elevate the visual impact of any space—indoors or outdoors. From powerful **wall washers** to precise **accent spotlights**, the collection offers versatile solutions that highlight textures, shapes, and structural elements with style and clarity. Available in various **beam angles, color temperatures, and mounting options**, this range combines **performance, durability, and refined design**, making it ideal for **facades, pathways, landscape features**, and **interior focal points**.

FACADE	Page 424-431
ACCENT	Page 432-437

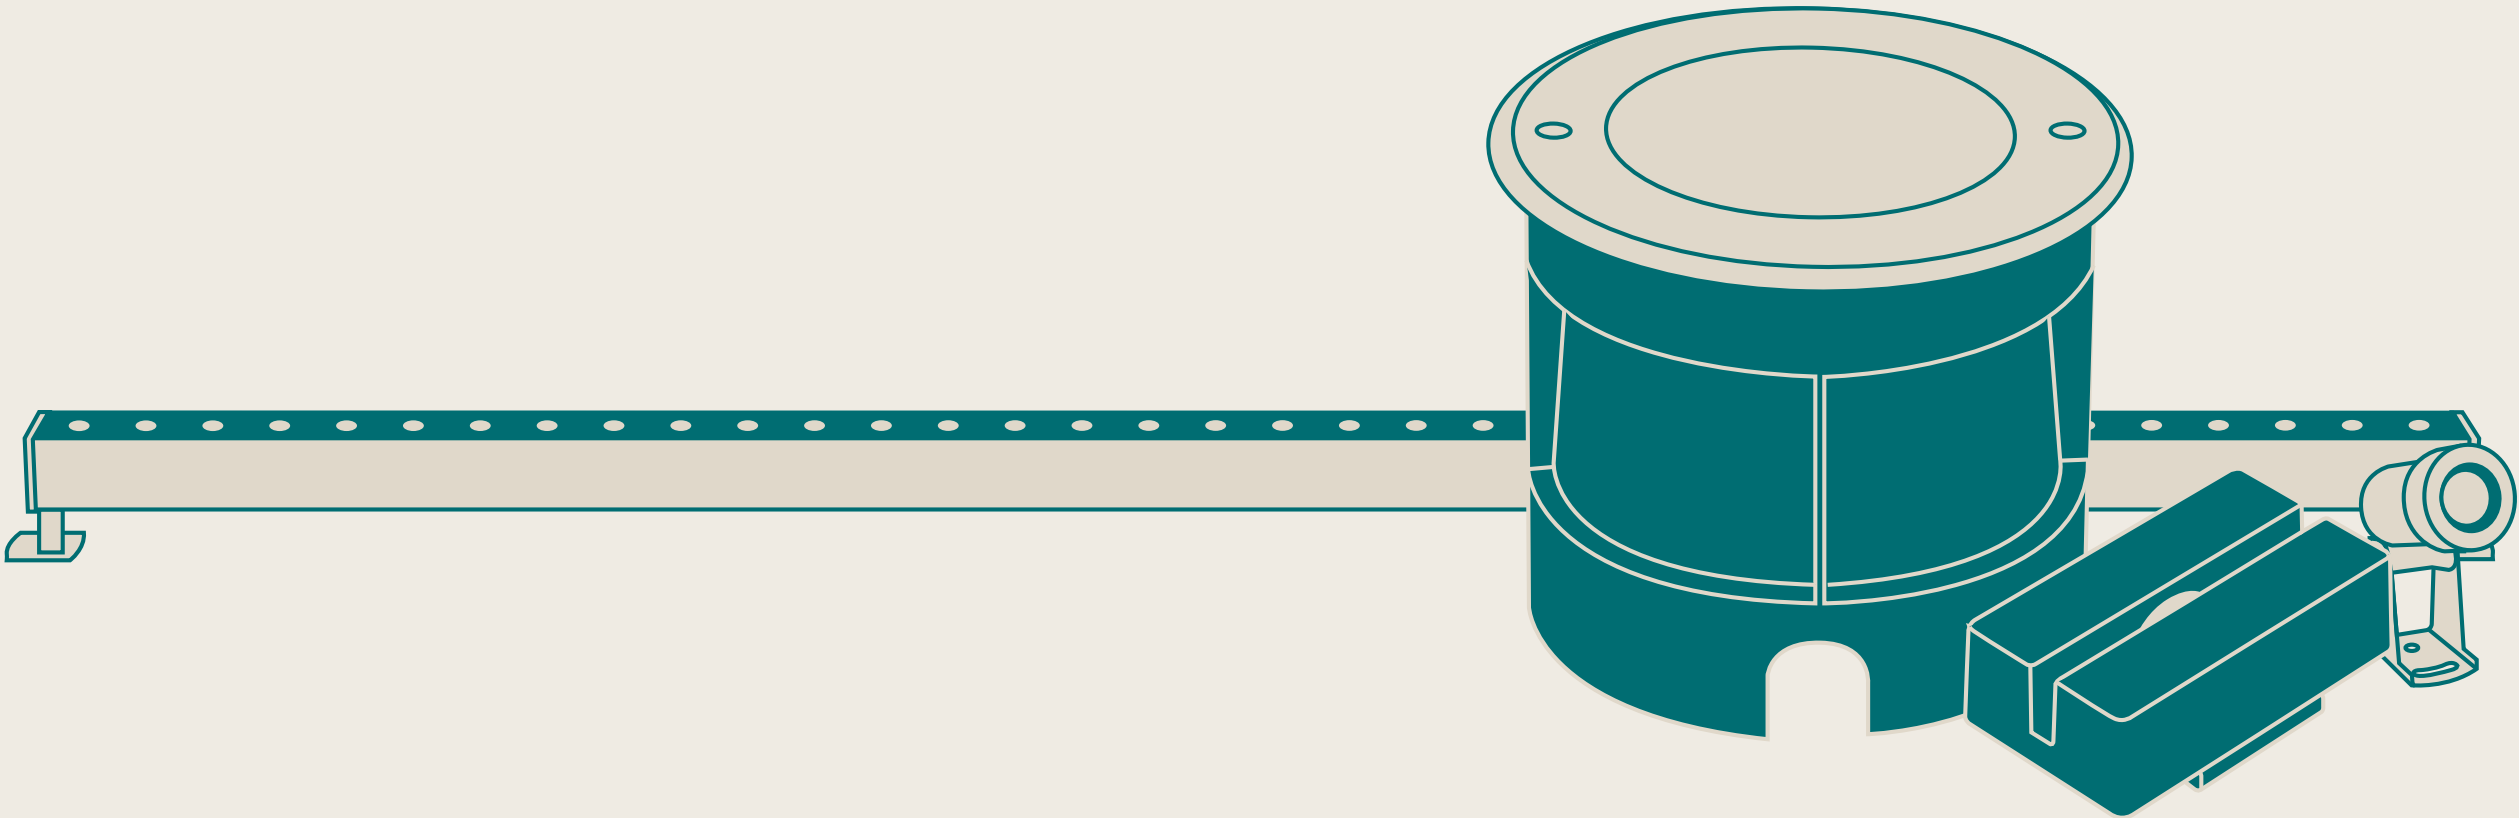





FAÇADE & ACCENT LIGHTING

Our **accent and façade lighting collection** is crafted to bring out architectural character and enhance the visual appeal of both **indoor and outdoor spaces**. From **high-performance wall washers** to **precision accent spotlights**, the range offers **flexible solutions** that emphasize surfaces, forms, and design features with **clarity and elegance**. With a wide selection of **beam angles, color temperatures, and mounting** options, this product family delivers a balance of **durability, efficiency, and architectural refinement**—perfect for facades, walkways, landscapes, and key interior elements.


Dusty

PRO



- SS316
- IP67
- Adjustable Beam Angle

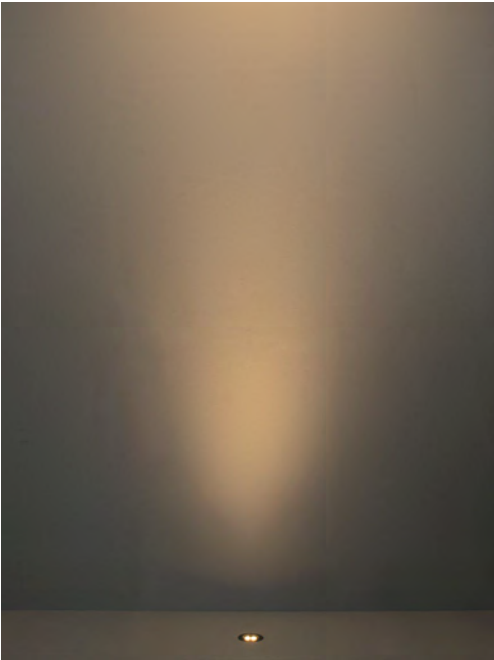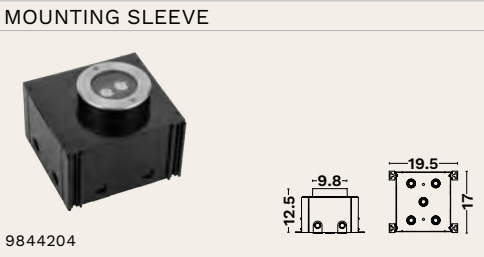


CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9844200	4W	3000K	345Lm	D 10 H 10.3	220-240Vac	On/Off included

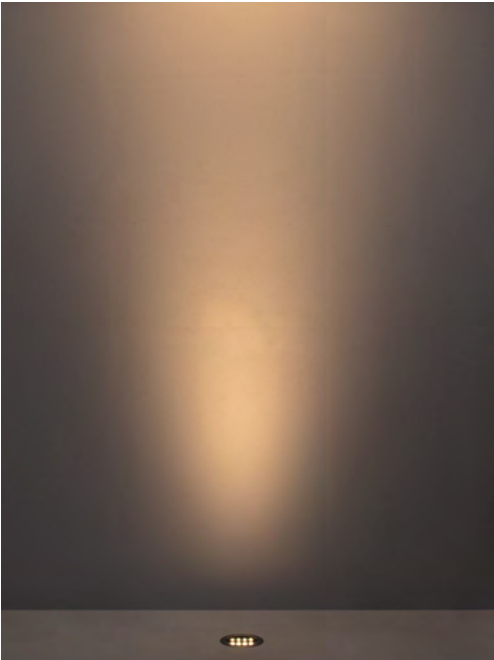

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9844202	12W	3000K	1087Lm	D 17 H 10.1	220-240Vac	On/Off included

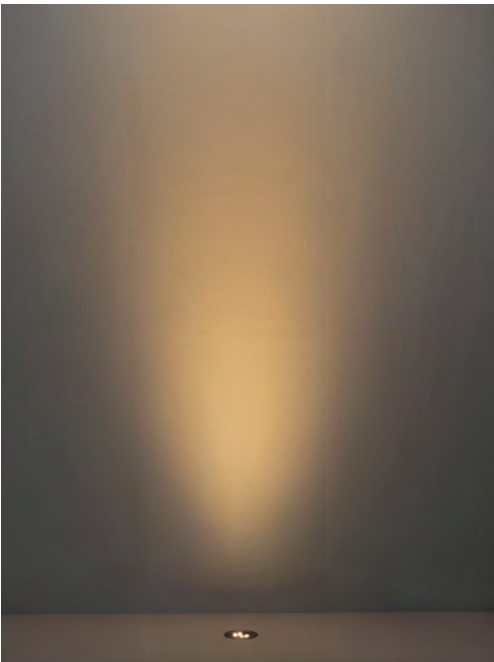

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9844201	8W	3000K	665Lm	D 13.5 H 10.1	220-240Vac	On/Off included

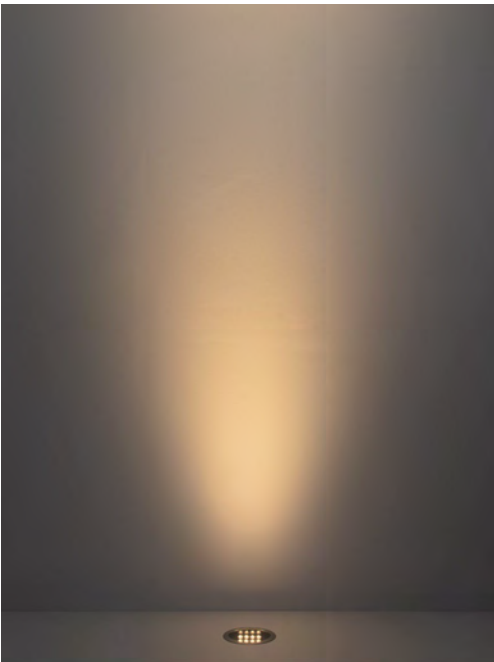

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9844203	18W	3000K	1607Lm	D 21 H 10.1	220-240Vac	On/Off included




*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524



Narrow

ESSENTIAL



- SS316
- IP67

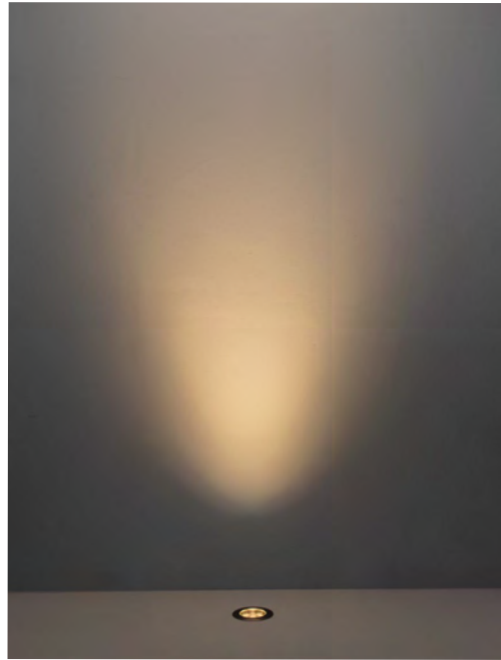

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9203120	6W	3000K	525Lm	D 15 H 16.5	110-240Vac	On/Off included

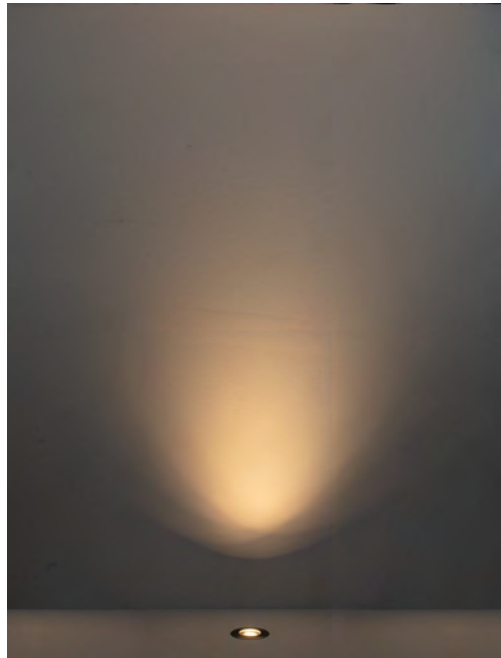

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9203121 	14W	3000K	1232Lm	D 18 H 18.7	110-240Vac	On/Off included

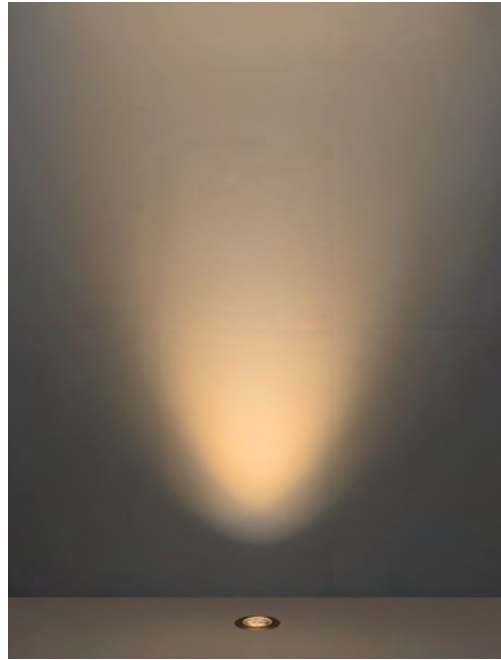

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9203122	18W	3000K	1456Lm	D 16 H 13.5	110-240Vac	On/Off included



*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

Wall Washer

- Max Power 300 Watt

OPTIONAL ACCESSORIES


Brackets - Combine with 9011162
2pcs Included



9011163



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9011161	● 32W	3000K	3388Lm	L 100 W 6.5 H 12	24Vdc	-
9011162	● 44W	3000K	4223Lm	L 100 W 6.5 H 12	24Vdc	




Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS
IP67	9840106	75W, 24Vdc	L 13.8 W 6.3 H 3.2
	9840107	100W, 24Vdc	L 15.3 W 6.3 H 3.2
	9840108	150W, 24Vdc	L 18.6 W 6.3 H 3.2
	9840109	200W, 24Vdc	L 19.9 W 6.3 H 3.7

INSTALLATION 9011161/ 9011162



CONNECTION 9011161 - 9011162

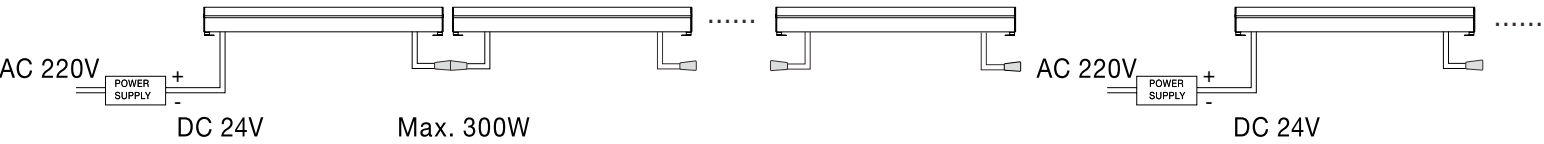

*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

Wall Washer

- Ultra Thin




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9011102	● 15W	3000K	746Lm	L 100 W 2.5 H 3.5	24Vdc	-



Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS
IP67	9840106	75W, 24Vdc	L 13.8 W 6.3 H 3.2
	9840107	100W, 24Vdc	L 15.3 W 6.3 H 3.2
	9840108	150W, 24Vdc	L 18.6 W 6.3 H 3.2
	9840109	200W, 24Vdc	L 19.9 W 6.3 H 3.7


INSTALLATION 9011102

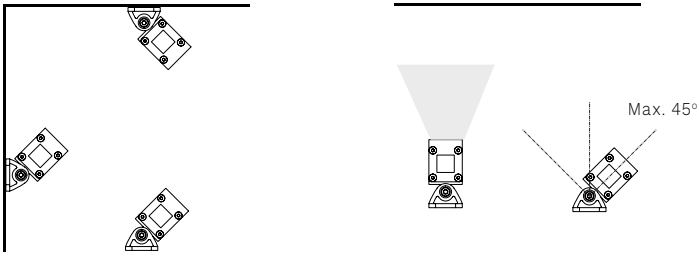

Max. 45°

Dio

PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9136752	● 4W	2700K	60Lm	L 15.5 W 8.5 H 4.7	220-240Vac	On/Off included
9136450	● 4W	3000K	60Lm	L 15.5 W 8.5 H 4.7	220-240Vac	
9136753	○ 4W	2700K	60Lm	L 15.5 W 8.5 H 4.7	220-240Vac	
9136451	○ 4W	3000K	60Lm	L 15.5 W 8.5 H 4.7	220-240Vac	



*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

Rabit

ESSENTIAL




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9203119	● 3W	3000K	65Lm	D 12 H 3.7	24Vdc	-



Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS
IP20	9840110	30W, 24Vdc	L 12.9 W 5 H 1.35
	9840100	60W, 24Vdc	L 16 W 5.75 H 1.8
IP67	9840106	75W, 24Vdc	L 13.8 W 6.3 H 3.2

Tree

- Fabric belt 1m



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9030920	● 4W	3000K	295Lm	D 4.5 H 7.5	24Vdc	-
9030921	● 8W	3000K	464Lm	D 5 H 9	24Vdc	



Remote Drivers

	CODE	DESCRIPTION	DIMENSIONS
IP20	9840110	30W, 24Vdc	L 12.9 W 5 H 1.35
	9840100	60W, 24Vdc	L 16 W 5.75 H 1.8
IP67	9840106	75W, 24Vdc	L 13.8 W 6.3 H 3.2

*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

Ander

- Dip Switch



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9050702	● 10W	3000K/4000K/5000K	604Lm	L 13.5 W 11.5 H 11.8	220-240Vac	On/Off included



Law InOut

ESSENTIAL


- Adj. Beam Angle 20°-47°



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9136206	● 5W	2700K	206Lm	L 9 W 4.5 H 9.4	220-240Vac	On/Off included
9136207	● 5W	3000K	196Lm	L 9 W 4.5 H 9.4	220-240Vac	



- Adj. Beam Angle 15°-35°



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9136209	● 10W	2700K	1011Lm	L 13 W 7.6 H 15.3	220-240Vac	On/Off included
9136210	● 10W	3000K	1037Lm	L 13 W 7.6 H 15.3	220-240Vac	



Stal

PRO

- IP68
- SS316

Remote Drivers

	CODE	DESCRIPTION	DIMENSIONS
IP20	9840110	30W, 24Vdc	L 12.9 W 5 H 1.35
	9840100	60W, 24Vdc	L 16 W 5.75 H 1.8
IP67	9840106	75W, 24Vdc	L 13.8 W 6.3 H 3.2



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9203115	● 2W	3000K	200Lm	L 7.15 W 3.5 H 5.2	24Vdc	-



Sento

PRO

- Included plastic spike (+16 cm)

Remote Drivers

	CODE	DESCRIPTION	DIMENSIONS
IP20	9840110	30W, 24Vdc	L 12.9 W 5 H 1.35
	9840100	60W, 24Vdc	L 16 W 5.75 H 1.8
IP67	9840106	75W, 24Vdc	L 13.8 W 6.3 H 3.2



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9050732	● 3W	2700K	135Lm	D 3.5 H 5	24Vdc	-
9050731	● 3W	3000K	135Lm	D 3.5 H 5	24Vdc	
9050734	● 3W	2700K	135Lm	D 3.5 H 5	24Vdc	
9050733	● 3W	3000K	135Lm	D 3.5 H 5	24Vdc	





*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

INDUSTRIAL,
EMERGENCY
& STREET
LIGHTS
438----457

Pages

Our **industrial, emergency, and street lighting range** is engineered for reliability and high performance in the most demanding environments. It includes high bay and linear high bay fixtures with **asymmetric lens** options for precise illumination in large areas such as **warehouses** and **production facilities**. The range also offers **floodlights** for wide-area coverage, **damp-proof lights** for moisture- and **dust-prone conditions**, and a comprehensive selection of **emergency lighting** to ensure safety and regulatory compliance. With a strong focus on efficiency, durability, and functional versatility, this range provides complete lighting solutions tailored to industrial applications.

INDUSTRIAL	Page 440-447
STREET LIGHTS	Page 448-451
EMERGENCY	Page 452-457

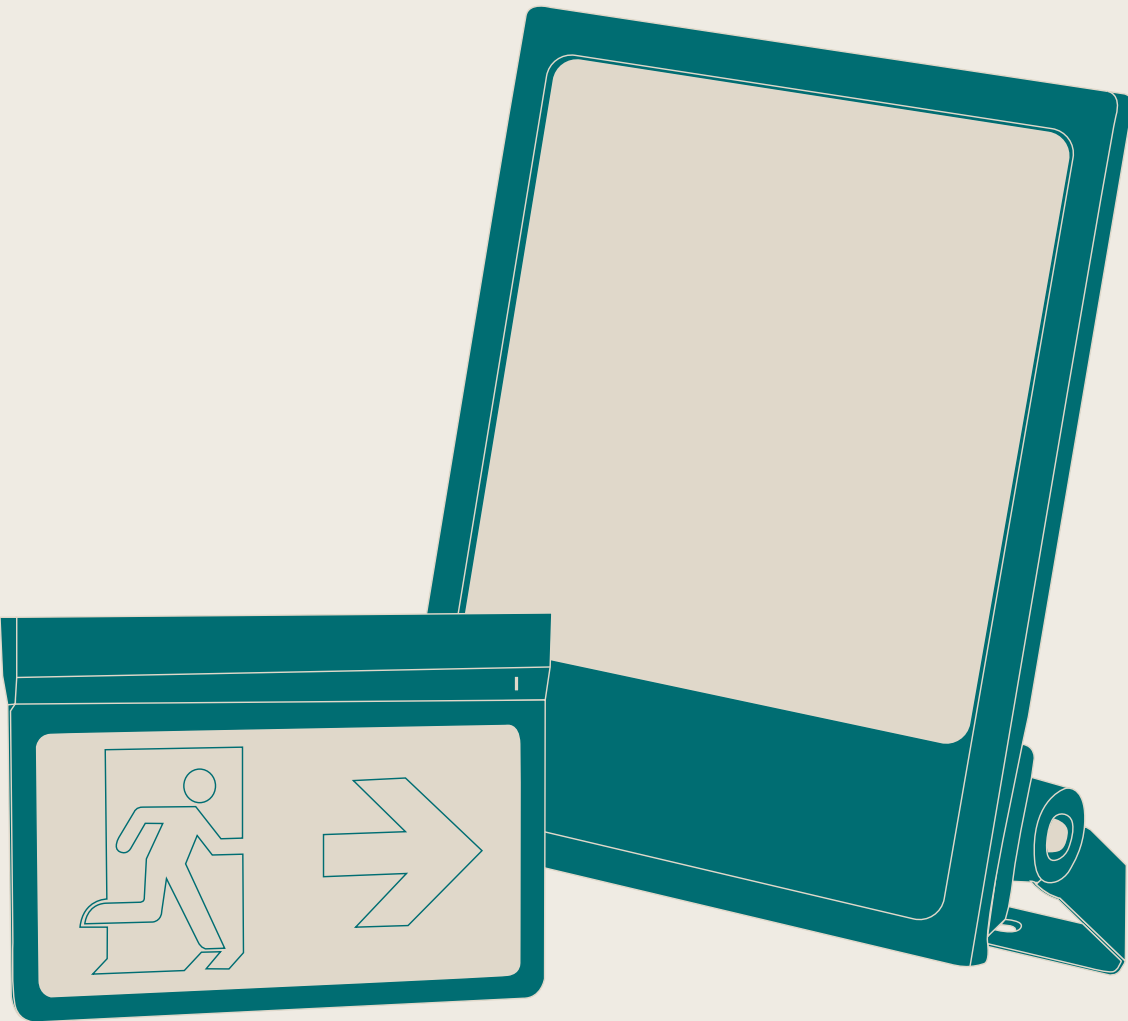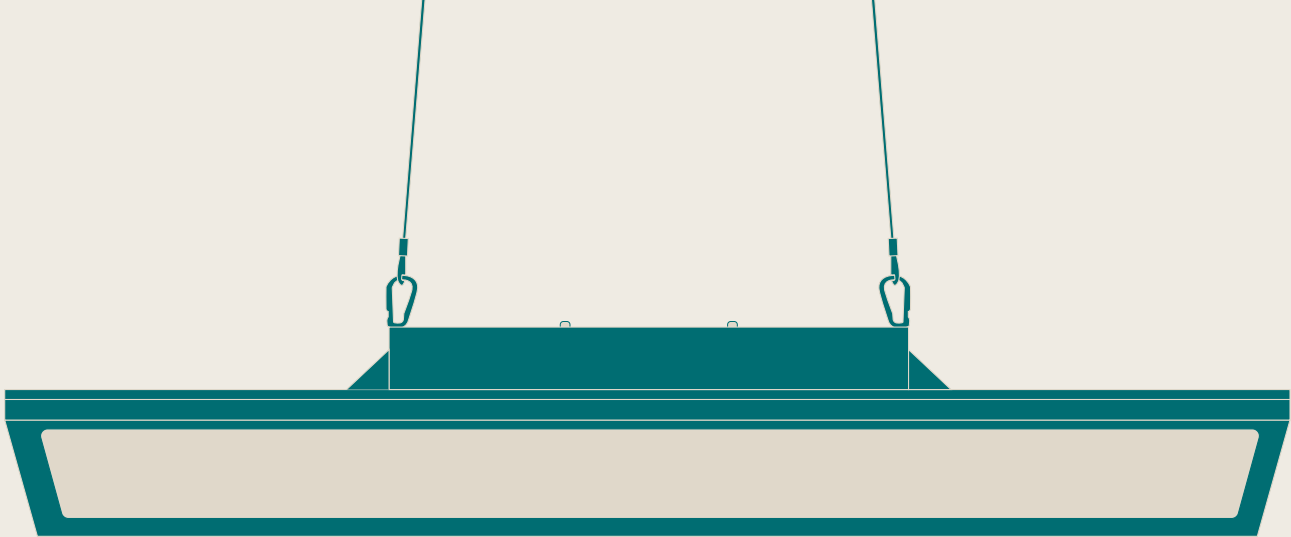




INDUSTRIAL

Our **industrial lighting range** is designed for maximum performance and efficiency in demanding environments. The **high bay fixtures** are available in **multiple beam angles** and **CCT options**, allowing precise light distribution tailored to various ceiling heights and workspace needs. The **linear high bay** features **asymmetric lenses** for targeted illumination in aisles and narrow areas, while our **damp-proof lights** are built to withstand moisture, dust, and impact. All products in this range deliver **high efficacy up to 150 lm/W**, ensuring energy savings without compromising on light quality or durability.



Umbler

PRO

- 150 Lm/W
- 60° and 90° degrees options
- 4000K and 5000K options
- IP65



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9980106 ●	100W	4000K	15910Lm	D 25 H 14.2	120-277Vac	On/Off Included
9980100 ●	100W	5000K	15910Lm	D 25 H 14.2	120-277Vac	On/Off Included
9980103 ●	100W	5000K	15910Lm	D 25 H 14.2	120-277Vac	Dali Included
9980107 ●	150W	4000K	23870Lm	D 28.7 H 14.3	120-277Vac	On/Off Included
9980101 ●	150W	5000K	23870Lm	D 28.7 H 14.3	120-277Vac	On/Off Included
9980104 ●	150W	5000K	23870Lm	D 28.7 H 14.3	120-277Vac	Dali Included
9980108 ●	200W	4000K	32146Lm	D 32.9 H 14.5	120-277Vac	On/Off Included
9980102 ●	200W	5000K	32146Lm	D 32.9 H 14.5	120-277Vac	On/Off Included
9980105 ●	200W	5000K	32146Lm	D 32.9 H 14.5	120-277Vac	Dali Included

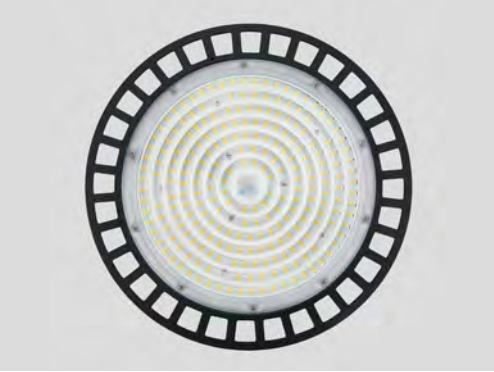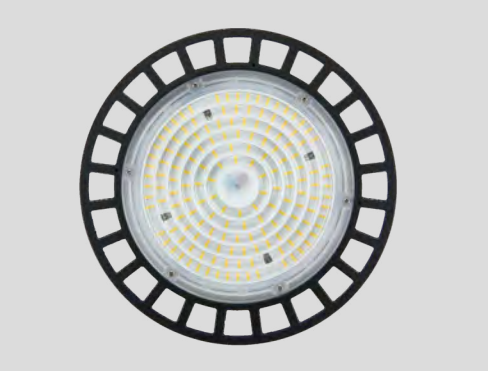

OPTIONAL ACCESSORIES



90° Degrees

9980109 for 9980106, 9980100, 9980103
9980110 for 9980107, 9980101, 9980104
9980111 for 9980108, 9980102, 9980105


Linear HB

PRO

- 150 Lm/W
- Assymetric lenses ideal for aisles warehouses
- IP65

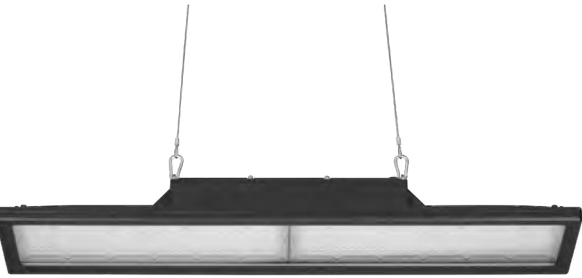

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9310009 ●	100W	5000K	16000Lm	L 75.35 W 15.75 H 11.22	120-277Vac	0-10Vdc Dimmable Included
9310010 ●	100W	5000K	16000Lm	L 75.35 W 15.75 H 11.22	120-277Vac	On/Off Included
9310011 ●	150W	5000K	24000Lm	L 75.35 W 15.75 H 11.22	120-277Vac	On/Off Included
9310012 ●	200W	5000K	32000Lm	L 75.35 W 15.75 H 11.22	120-277Vac	On/Off Included




Grotto

ESSENTIAL



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9050805	10W	3000K	1000Lm	L 10.6 W 2.5 H 8	220-240Vac	On/Off included
9050806	10W	4000K	1100Lm	L 10.6 W 2.5 H 8	220-240Vac	
9050807	20W	3000K	2000Lm	L 14 W 2.6 H 10.2	220-240Vac	
9050808	20W	4000K	2100Lm	L 14 W 2.6 H 10.2	220-240Vac	
9050809	20W	6500K	2250Lm	L 14 W 2.6 H 10.2	220-240Vac	
9050810	50W	3000K	5000Lm	L 22.1 W 3.2 H 16	220-240Vac	
9050811	50W	4000K	5100Lm	L 22.1 W 3.2 H 16	220-240Vac	
9050812	50W	6500K	5200Lm	L 22.1 W 3.2 H 16	220-240Vac	
9050813	100W	3000K	10000Lm	L 32.9 W 3.4 H 22.5	220-240Vac	
9050814	100W	4000K	10100Lm	L 32.9 W 3.4 H 22.5	220-240Vac	
9050815	100W	6500K	10200Lm	L 32.9 W 3.4 H 22.5	220-240Vac	
9050816	150W	4000K	15000Lm	L 38.2 W 3.6 H 28.4	220-240Vac	
9050817	150W	6500K	15150Lm	L 38.2 W 3.6 H 28.4	220-240Vac	
9050818	200W	4000K	20000Lm	L 43.6 W 3.6 H 30.6	220-240Vac	
9050819	200W	6500K	20100Lm	L 43.6 W 3.6 H 30.6	220-240Vac	

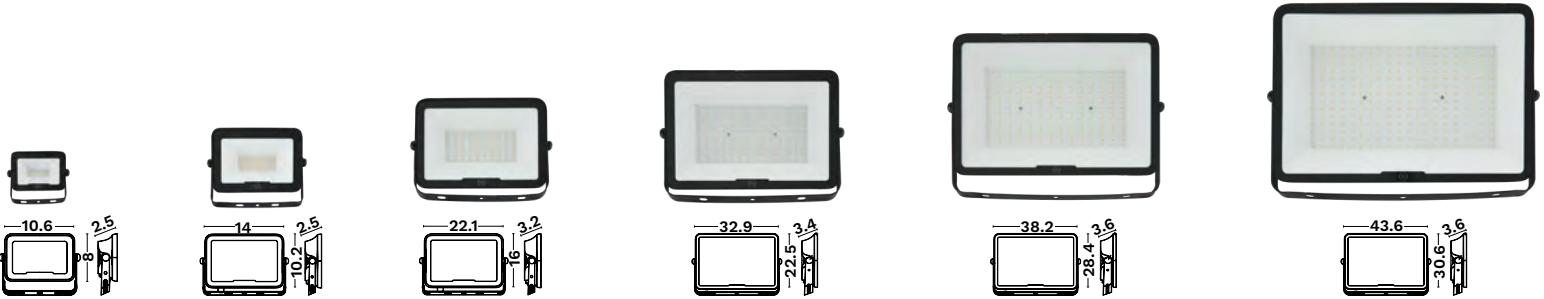


*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524


Titan

PRO

- 150 Lm/W
- Symmetric & Assymetric lenses options

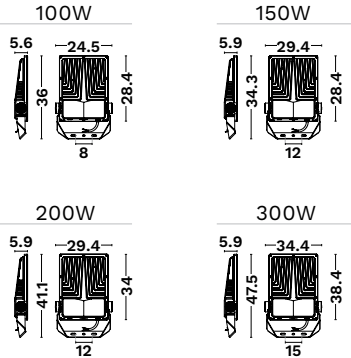

CODE	WATT	CCT	FLUX	BEAM ANGLE	DIMENSIONS (cm)	VOLTAGE	DRIVER
9310013	100W	4000K	14500Lm	90°	L 24.5 W 5.6 H 36	120-277Vac	On/Off Included
9310019	100W	4000K	14500Lm	130° x 35°	L 24.5 W 5.6 H 36	120-277Vac	
9310014	100W	5700K	14500Lm	90°	L 24.5 W 5.6 H 36	120-277Vac	
9310015	150W	4000K	21750Lm	90°	L 29.4 W 5.9 H 34.3	120-277Vac	
9310020	150W	4000K	21750Lm	130° x 35°	L 29.4 W 5.9 H 41.1	120-277Vac	
9310016	150W	5700K	21750Lm	90°	L 29.4 W 5.9 H 34.3	120-277Vac	
9310017	200W	4000K	29000Lm	90°	L 29.4 W 5.9 H 41.1	120-277Vac	
9310021	200W	4000K	29000Lm	130° x 35°	L 29.4 W 5.9 H 47.5	120-277Vac	
9310018	200W	5700K	29000Lm	90°	L 29.4 W 5.9 H 41.1	120-277Vac	
9310022	300W	4000K	43500Lm	90°	L 34.4 W 5.9 H 47.5	120-277Vac	

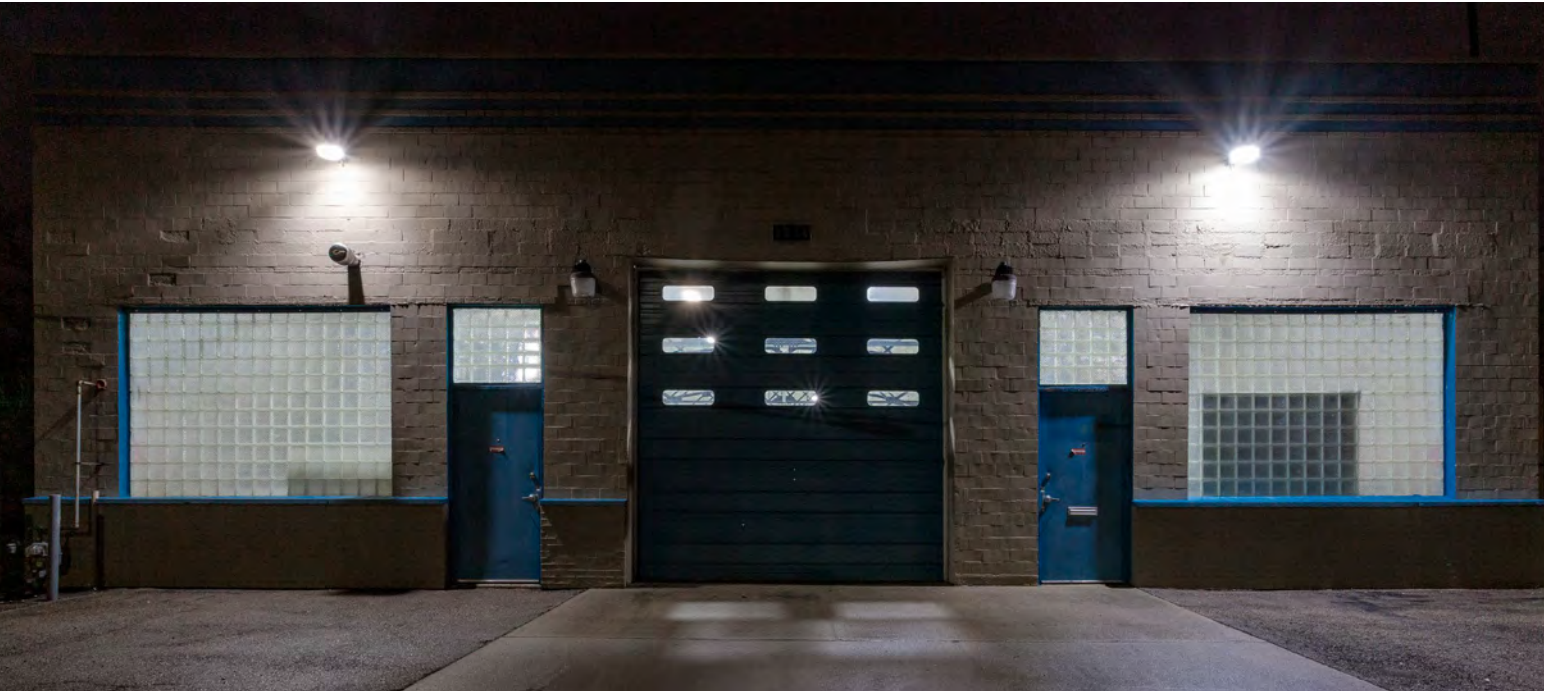

-
- Technical drawing of the LED strip light. The left side shows a perspective view of the white, flexible strip. The right side shows a side view with dimensions: a length of 120 and a width of 10.

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9080800 ○	36W	4000K	4757Lm	L 120 W 4.8 H 6	220-240Vac	On/Off Included
9080801 ○	36W	6500K	4820Lm	L 120 W 4.8 H 6	220-240Vac	



CLASS II VERSION

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9080802 	36W	4000K	4759Lm	L 120 W 5.8 H 7.2	220-240Vac	On/Off Included
9080803	36W	6500K	4819Lm	L 120 W 5.8 H 7.2	220-240Vac	



-
- Technical drawing of a white PVC profile. The profile is shown in a perspective view and a cross-section view. The cross-section is a square with dimensions 10 mm by 10 mm. The length of the profile is 120 cm, and the width is 3.5 cm.

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9080804	18W	4000K	1905Lm	L 120 W 5.3 H 3.5	220-240Vac	On/Off Included
9080805	36W	4000K	3604Lm	L 120 W 5.3 H 3.5	220-240Vac	



Darma

ESSENTIAL

-

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9080806 	40W	4000K	5777Lm	L 120 W 8.2 H 7.2	220-240Vac	On/Off Included
9080807 	40W	6500K	5937Lm	L 120 W 8.2 H 7.2	220-240Vac	
9080808 	50W	4000K	7530Lm	L 150 W 8.2 H 7.2	220-240Vac	
9080809 	50W	6500K	7673Lm	L 150 W 8.2 H 7.2	220-240Vac	






STREET LIGHTS

Our **street lighting range** includes **two high-efficiency versions** designed for road and public area illumination. For street applications, we offer models with **Type II beam angles**, available in **150 lm/W** for high-efficiency projects and **110 lm/W** for standard efficiency requirements—both delivering reliable performance and reduced energy consumption. For parks, plazas, and open areas, our **park lights** feature **Type V beam angles** for uniform 360° distribution and are engineered for **optimal efficiency**, ensuring safe and pleasant public environments with minimal light pollution.

Tano

PRO

- 140 Lm/W
- Assymetric lenses
- Toolless access
- 10KV surge protection





CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	SURGE PROTECTION	DRIVER
9090750	● 60W	4000K	8400Lm	L 56.8 W 22.2 H 10.7	220-240Vac	10KV	On/Off Included
9090751	● 100W	4000K	14000Lm	L 63 W 28 H 10.7	220-240Vac	10KV	
9090752	● 150W	4000K	21000Lm	L 74.8 W 32 H 11.6	220-240Vac	10KV	



Zeva

ESSENTIAL

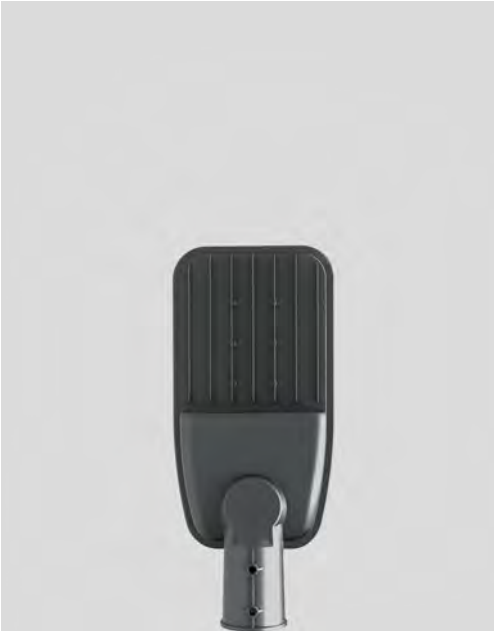


CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DRIVER
9090753	● 60W	4000K	8400Lm	L 47.6 W 20.7 H 9.2	220-240Vac	On/Off Included
9090755	● 60W	5700K	8400Lm	L 47.6 W 20.7 H 9.2	220-240Vac	
9090754	● 100W	4000K	14000Lm	L 54.1 W 25.8 H 9.2	220-240Vac	
9090756	● 100W	5700K	14000Lm	L 54.1 W 25.8 H 9.2	220-240Vac	



Lattern

PRO



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	SURGE PROTECTION	DRIVER
9090757	● 60W	3000K	6600Lm	D 51 H 54	220-240Vac	10KV	On/Off Included
9090758	● 60W	4000K	6600Lm	D 51 H 54	220-240Vac	10KV	






EMERGENCY

Our **emergency lighting range** offers a **wide variety of high-quality solutions** to ensure safety and compliance across all types of installations. The line up includes **emergency downlights, battery packs**, and both **standard and centralized systems**, covering everything from basic needs to advanced applications. Designed for **reliability, efficiency, and long-lasting performance**, our emergency products provide dependable lighting during power outages and critical situations—ideal for commercial, industrial, and public spaces.

EL101




INCLUDED IN THE PACKAGE

CODE	WATT	LEDS TYPE	VOLTAGE	AUTONOMY	BATTERY SPEC	VIEWING DISTANCE	DIMENSIONS(cm)
9080824	2.5W	12 x 2835	220-240Vac	3 hours	LiFePO4 / Ni-cad batteries	20m	L 24 W 4.1 H 9



EL102




INCLUDED IN THE PACKAGE

CODE	WATT	LEDS TYPE	VOLTAGE	AUTONOMY	BATTERY SPEC	VIEWING DISTANCE	DIMENSIONS(cm)
9080810	3W	12 x 2835	220-240Vac	3 hours	3.2V 1800mAh LiFePO4 Battery	20m	L 26.5 W 5.6 H 11.8




EL501



CODE	WATT	LEDS TYPE	VOLTAGE	AUTONOMY	BATTERY SPEC	VIEWING DISTANCE	DIMENSIONS(cm)
9080811	2W	12 x 2835	220-240Vac	3 hours	3.2V 1800mAh LiFePO4	30m	L 28.9 W 3.5 H 21.9



EL502



CODE	WATT	LEDS TYPE	VOLTAGE	AUTONOMY	BATTERY SPEC	VIEWING DISTANCE	DIMENSIONS(cm)
9080812	2W	12 x 2835	220-240Vac	3 hours	3.2V 600mAh LiFePO4 Battery	30m	L 28.3 W 2.7 H 20



OPTIONAL ACCESSORIES

Recessed Kit



9080814

Hanging Kit



9080813

Green Stickers Left/Right Arrow



9080815



OPTIONAL ACCESSORIES

Recessed Kit



9080825

Hanging Kit



9080813

Green Stickers Left/Right Arrow




9080816



EMERGENCY


EL301




CODE	WATT	LEDS TYPE	CCT	FLUX	VOLTAGE	AUTONOMY	BATTERY SPEC	VIEWING DISTANCE	DIMENSIONS(cm)
9080817	2 x 5W	2 X 6	600K	500Lm	220-240Vac	3 hours	3.2V 6000mah LiFePO4 Battery	20m	L 22.6 W 7.92 H 24.75





EL401




CODE	WATT	LEDS TYPE	CCT	FLUX	VOLTAGE	AUTONOMY	BATTERY SPEC	VIEWING DISTANCE	DIMENSIONS(cm)
9080819	3W	1 x 3W	5500K	150Lm	220-240Vac	3 hours	3.2V 1800mAh LiFePO4 battery	20m	L 15.05 W 2.95 H 2.9



EL201




CODE	WATT	LEDS TYPE	CCT	FLUX	VOLTAGE	AUTONOMY	BATTERY SPEC	VIEWING DISTANCE	DIMENSIONS(cm)
9080820	3W	1 x 3W	6000K	140Lm	220-240Vac	3 hours	LiFePO4 3.2V 1.8Ah	20m	D 12.3 H 5.6
9080821	3W	1 x 3W	6000K	140Lm	220-240Vac	3 hours	LiFePO4 3.2V 1.8Ah	20m	D 12.3 H 5.6



EMERGENCY


EL202



CODE	WATT (selectible)	LEDS TYPE	CCT (selectible)	FLUX	VOLTAGE	AUTONOMY	BATTERY SPEC	VIEWING DISTANCE	DIMENSIONS(cm)
9080822	15W 18W 20W	672 pcs SMD 2835	3000K 4000K 6000K	170Lm	220-240Vac	3 hours	3.2V 1800mAh LiFePO4	20m	D 35.2 H 4.65
9080823	8W 10W 12W	336 pcs SMD 2835	3000K 4000K 6000K	150Lm	220-240Vac	3 hours	3.2V 1800mAh LiFePO4	20m	D 25.5 H 4.8



ELPack



CODE	WATT	VOLTAGE	AUTONOMY	BATTERY SPEC	VIEWING DISTANCE	DIMENSIONS(cm)
9080818	<50W	220-240Vac	3 hours	6.4V 3200mAh LiFePO4	20m	L 22.5 W 6.04



LED STRIPS & NEON FLEX

458----521

Pages

Our extensive range of **Led Strips** and **NEON Flex** is designed to meet diverse lighting needs with **unmatched performance, versatility, and durability**. Manufactured with **high-quality materials** and **advanced technology**, these products ensure consistent illumination with **SDCM<3**, guaranteeing uniform color and brightness across all applications. Whether enhancing indoor spaces, highlighting outdoor architectural features, or serving specialized purposes, our **Led Strips** and **NEON Flex** meet the **highest photometric standards**. Featuring **waterproof protection, flexible designs**, and **compatibility** with advanced control systems such as **SPI** and **DMX**, they are ideal for creative and functional projects. From subtle accents to bold lighting statements, our broad range of products ensures seamless integration and exceptional reliability in any environment.

CHEAT SHEET	Page 462-465
NEON FLEX	Page 466-477
UNDERWATER	Page 478-485
LED STRIPS	Page 486-511
WALLWASHERS	Page 512-515
PROFILES	Page 516-517
LED DRIVERS	Page 518-519
ACCESORIES	Page 520-521

Product Categories & Series

Three Different product categories Architecture Neon FLEX, LED Strip & Silicone Wallwashers

Our product range contains two series of products, The “ESSENTIAL” series and the “PRO” Series.

Architecture Neon Flex

The Architecture Neon Series comprises high-reliability neon flex lighting designed for versatile use in indoor, outdoor, and underwater environments. This series includes Facade Light and Underwater options. Facade Light is offered in various sizes, light colors, and SPI/DMX control options, providing a versatile solution for applications demanding exceptional photoelectric performance. Underwater is distinguished by its IK08 and IP68 protection ratings, ensuring durability and reliability for underwater lighting installations.



Led Strips

Led Strips, designed to meet diverse lighting needs with exceptional performance and reliability. Built to withstand various conditions, including waterproof options, they deliver high photometrical standards for precise and vibrant illumination. Ideal for both functional and decorative applications, our Led Strips combine durability and efficiency, ensuring they excel in any environment.



Silicon Wallwashers

Wallwashers offer a versatile and durable solution for illuminating walls with smooth, even light distribution. Designed with advanced materials, they provide excellent resistance to environmental factors, ensuring long-lasting performance. Perfect for both indoor and outdoor applications, these wallwashers deliver high photometric accuracy, creating dynamic lighting effects for architectural and decorative projects.



Essential

The Essential series is a versatile and affordable lighting solution designed for everyday use. These Led Strips provide a balance of efficiency and functionality, making them ideal for both residential and commercial applications. Featuring a flexible and easy-to-install design, they can be customized to fit a variety of spaces, including under cabinets, shelves, or around decorative elements. With energy-efficient LEDs, the Basic series offers reliable illumination while reducing power consumption. Available in a range of color temperatures and brightness levels, these strips provide a simple yet effective way to enhance ambiance and visibility in any setting.




Pro

The PRO series is a premium lighting solution engineered for superior performance and precision. Designed with energy efficiency in mind, these products deliver high luminous output while consuming minimal power, making them both cost-effective and environmentally friendly. Boasting a stringent SDCM (Standard Deviation of Color Matching) of less than 3, the PRO series ensures exceptional color consistency across all installations, providing uniform lighting that meets professional standards. With high brightness levels, these strips are perfect for demanding applications, such as retail displays, architectural accents, and task lighting. Durable and versatile, the PRO series combines advanced technology with unmatched reliability, making it the top choice for professionals seeking premium quality lighting.



Customizable IP68 NEON FLEX

We are excited to announce that our NEON 1617 IP68 product is now fully customizable in size, with a maximum length of 14 meters, thanks to our state-of-the-art molding injection machine. This advancement enables us to meet diverse customer needs with precision and flexibility, providing tailored solutions without compromising the product's renowned durability and water resistance. Whether you require shorter sections for compact installations or longer lengths for extensive projects, our enhanced manufacturing capabilities ensure consistent quality and reliability across all custom sizes. Additionally, with the superior quality of materials used and the precision of our molding process, we guarantee that all our products maintain exceptional chlorine, alkaline, and UV resistance, ensuring long-lasting performance in even the harshest environments.

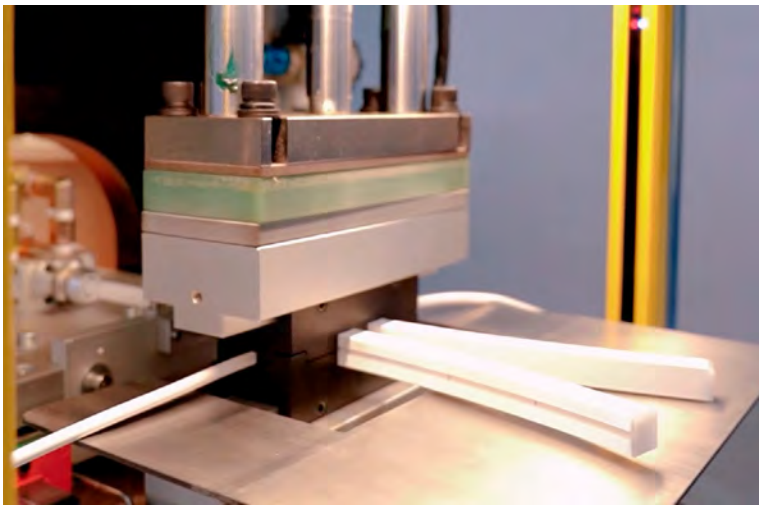

PAGE	MODEL	DC(V)	MAX. W/M	LM/W	LM/M (MAX)	CRI	CCT	LEDS/M		BENDING	UNIT CUT	FPS WIDTH	LENGHT	IP PROCESS	WARANTY
Architercture Neon															
470	Gomu 16x17	24	10	68	680	94	2700K3000K4000K	120		3D	50mm	16mm	10m	IP67	5 YEARS
472	Kema 16x16	24	16	71	1120	96	3000K4000KRGBW3000K	140		Top	67mm	16mm	30m	IP67	5 YEARS
473	Gomu 16x15	24	15	78	780	94	2700K3000K4000KRGBW4000K	120		Top	125mm	16mm	30m	IP67IP44	5 YEARS
474	Kema 10x18	24	14	34	494	96	3000KRGBRGBW3000K	140		Side	100mm	10mm	20m	IP67	5 YEARS
475	Gomu 12x20	24	15	56	560	95	2700K3000K4000KRGBW4000K	120		Side	50mm	12mm	17m	IP67IP44	5 YEARS
476	Gomu 10x10	24	10	77	765	94	2700K3000K4000K	168		Top	35.7mm	10mm	5m	IP67	5 YEARS
477	Kema 8x8	24	6	68	410	94	2700K3000K4000K	120		3D	29.4mm	8mm	5m	IP67	5 YEARS
478	Kema 6x6	24	8	95	756	92	2700K3000K4000K	240		Top	30mm	6mm	5m	IP67	5 YEARS
478	Kema 4x10	24	10	49	490	95	2700K3000K4000K	182		Top	38.5mm	4mm	5m	IP67	5 YEARS
479	Kema R18	24	12	64	766	97	3000K	360		3D	free	R18	5m	IP65	5 YEARS
479	Kema R23	24	14	68	955	96	3000K	280		3D	free	R23	5m	IP65	5 YEARS
Architercture Neon Underwater															
482	Gomu 16x17	24	10	64	670	94	2700K3000K4000KRGBW3000K	120		Top / Side	50mm	16mm	14m	IP68	5 YEARS
484	Kema 16x16	24	14	63	875	92	3000K4000K	120		Top	50mm	16mm	5m	IP68	5 YEARS
484	Kema 20x18 (Digital)	24	16	32	507	54	RGBW3000K	70		Top	100mm	20mm	5m	IP68	5 YEARS
485	Gomu 16x15	24	10	51	530	94	3000K	144		Top	50mm	16mm	5m	IP68	5 YEARS
490	Kema 10x18	24	14	42	590	95	3000K4000K	120		Side	50mm	10mm	5m	IP68	5 YEARS
490	Kema 12x20 (Digital)	24	16	33	532	94	RGBW3000K	70		Side	50mm	12mm	5m	IP68	5 YEARS
491	Gomu 12x20	24	10	37	389	94	3000K	144		Side	41.67m	12mm	5m	IP68	5 YEARS

PAGE	MODEL	DC(V)	MAX. W/M	LM/W	LM/M (MAX)	CRI	CCT	LEDS/M	UNIT CUT	FPS WIDTH	LENGHT	DIAGRAM (TYPE)	IP PROCESS	WARANTY
Led Strips - SILICON SMD														
490	Solid	24	12	108	1295	92	2700K 3000K 4000K	288	27.77mm	10mm	5m			5 YEARS
491	One	24	10	85	850	94	2700K 3000K 4000K	280	25mm	10mm	5m			5 YEARS
Led Strips - COB														
492	Vida	24	12	117	1400	91	2700K 3000K 4000K 6500K	480	50mm	12mm	5m			5 YEARS
493	Goro	24	10	132	1320	92	2700K 3000K 4000K	480	50mm	10mm	5m			5 YEARS
494	Goro COB	24	16	53	850	92	RGBW 3000K	848	33.3mm	12mm	5m			5 YEARS
496	Vida Slim	24	8	117	940	91	2700K 3000K 4000K 6500K	320	50mm	10mm	5m			5 YEARS
497	Honor Slim	24	9.6	102	980	93	2700K 3000K 4000K	120	50mm	8mm	5m			5 YEARS
498	Vida Ultra Slim	24	7	103	720	94	3000K 4000K	384	50mm	5mm	5m			5 YEARS
Led Strips - SMD														
500	Honor	24	14.4	102	1470	93	2700K 3000K 4000K	180	33.33mm	10mm	5m			5 YEARS
501	Aktis	24	14.4	84	1216	93	3000K 4000K	120	50mm	8mm	5m			5 YEARS
502	Honor Plus	24	19.2	102	1960	93	2700K 3000K 4000K	240	25mm	10mm	5m			5 YEARS
503	Honor Slim Plus	24	14.4	102	1470	94	3000K 4000K	180	33mm	8mm	5m			5 YEARS
504	Aktis Plus	24	19.2	98	1795	93	3000K 4000K	240	25mm	10mm	5m			5 YEARS
506	Como He	24	14	162	2270	92	3000K 4000K	128	62.5mm	10mm	5m			5 YEARS
507	Performance He	24	7	186	1300	92	3000K 4000K	180	62.5mm	10mm	5m			5 YEARS
508	Free He	24	12	95	1140	90	2700K 3000K 4000K	180	free	6mm	5m			5 YEARS
509	Honor 48V	48	8	99	790	93	2700K 3000K 4000K	130	50mm	12mm	50m			2 YEARS
510	Honor HV	220-230	9	92	825	80	2700K 3000K 4000K	120	1000mm	14mm	50m			2 YEARS
511	Vida HV	220-230	8	75	600	70	2700K 3000K 4000K	288	1000mm	12mm	50m			2 YEARS
512	D2W	24	10	110	1100	90	1900K 3000K	168	83mm	10mm	5m			5 YEARS
513	TW	24	19.2	53	1010	80	2700K 6000K	120	50mm	10mm	5m			5 YEARS
Silicon Wallwashers														
516	Bine	24	25	84	2108	94	3000K 4000K	24	41.6mm	24mm	5m			5 YEARS
517	Diamond	24	80	83	6653	83	3000K 4000K	20	50mm	22mm	2.4m			5 YEARS



ARCHITECTURE
NEON FLEX

FACADE LIGHTING

- 1. Side / top / 3D bend
- 2. IP44 / IP65 / IP67 protection
with no dark spot
- 3. Multiple CCT, DMX
- 4. Neon profileless
- 5. Voltage 24Vdc


UNDER WATER

- 1. Side / top bend optional
- 2. IP68 / IK10 protection
- 3. Multiple CCT, DMX/SPI
- 4. Voltage 24Vdc

Gomu 16x17 3D PRO



- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

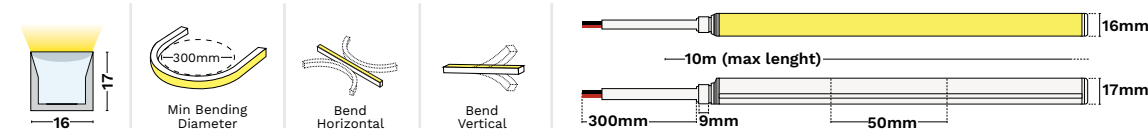

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530026	2700K	10	650	65	<3	50mm	10m ¹	16 x 17mm	10m
9530028	3000K	10	660	66	<3	50mm	10m ¹	16 x 17mm	10m
9530029	4000K	10	680	68	<3	50mm	10m ¹	16 x 17mm	10m



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

COMMON ACCESSORIES			
Silicone input cap	Silicone end cap	Alluminium profile 1m	Aluminium bending profile
9530030	9530031	9540428	9540429

*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524



Kema 16x16

ESSENTIAL



- IP67 protection level
- UV resistance
- Salt solution resistance



STANDARD VERSION

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540144	3000K	16	1096	69	50mm	5m	16 x 16mm	5m
9540145	4000K	16	1120	71	50mm	5m	16 x 16mm	5m



LONG VERSION


CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540154	3000K	6	365	61	50mm	30m ¹	16 x 16mm	30m



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.



- IP67 protection level
- UV resistance
- Salt solution resistance

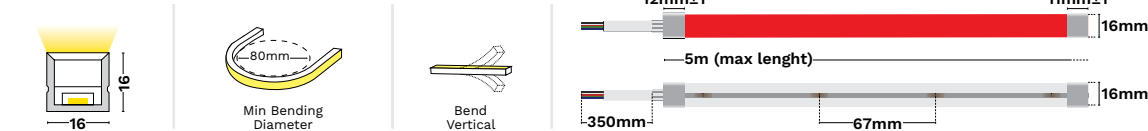

RGBW


CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540164	RGBW-3000K	16	727	46	67mm	5m	16 x 16mm	5m




COMMON ACCESSORIES						
Input cap (Straight Outlet)	Input cap (Side Outlet)	DIY End cap	Bracket	Aluminium Profile 1m	Aluminium Profile 2m	Aluminium Profile 1m (for intergrated end cap)
9540146	9540147	9540148	9540149	9540151	9540152	9540153

Gomu 16x15

PRO

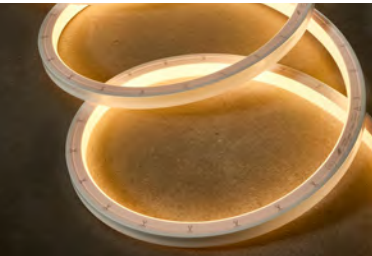


- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

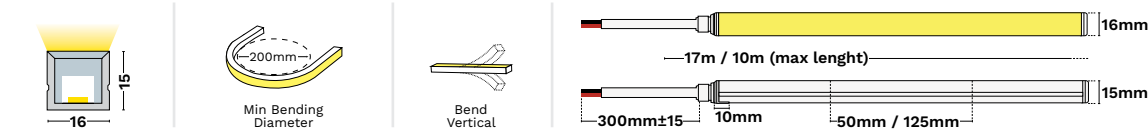

Bottom Cable Entry 300cm

STANDARD

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530011	2700K	10	740	74	<3	50mm	17m ¹	16 x 15mm	17m (DIY cap 10m)
9540010	3000K	10	765	77	<3	50mm	17m ¹	16 x 15mm	17m (DIY cap 10m)
9530012	4000K	10	780	78	<3	50mm	17m ¹	16 x 15mm	17m (DIY cap 10m)
9540011	RGBW-4000K	15	440	26	-	125mm	10m ¹	16 x 15mm	10m (DIY cap 4,8m)



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

LONG VERSION

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540058	3000K	5	365	73	<3	50mm	30m ¹	16 x 15mm	30m



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

COMMON ACCESSORIES				SINGLE COLOR			RGBW
Aluminium Profile 1m	Curved Profile 0.5m	Closed Endcap	Mounting Clips	Screwless input cap	Normal input cap	Middle Connector	Screwless input cap
9540012	9540013	9530016 9540017	9540014	9540015	9530014	9530025	9540016 9530015



- IP44 protection level



EMBEDDED VERSION - NO PROFILE

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530045	2700K	10	633	63	<3	50mm	17m ¹	16 x 15	17 (DIY cap 10)
9540046	3000K	10	660	66	<3	50mm	17m ¹	16 x 15	17 (DIY cap 10)
9530047	4000K	10	669	67	<3	50mm	17m ¹	16 x 15	17 (DIY cap 10)



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

ACCESSORIES	
Silicone input cap	Silicone end cap
9540047	9540048



*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

Kema 10x18

ESSENTIAL



- IP67 protection level
- UV resistance
- Salt solution resistance

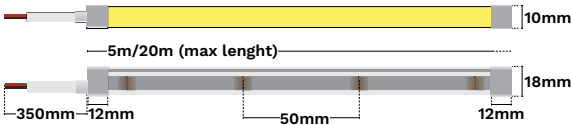

STANDARD VERSION

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540166	3000K	14	494	34	50mm	5m	10 x 18mm	5m



LONG VERSION



CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540165	3000K	10	344	34	50mm	20m ¹	10 x 18mm	20m



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.





- IP67 protection level
- UV resistance
- Salt solution resistance



RGB

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540169	RGB	14	170	12	50mm	5m	10 x 18mm	5m



RGBW


CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540173	RGBW-3000K	14	270	19	100mm	5m	10 x 18mm	5m





COMMON ACCESSORIES					SINGLE COLOR ACCESSORIES						RGBW	
End Cap	Bracket	Aluminium Profile	Aluminium Profile (for intergrated end cap) 1m	Stainless steel bendable profile	DIY Input cap (Straight Outlet)	DIY Input cap (Side Outlet)	DIY End Cap	Input cap (Straight Outlet)	Input cap (Bottom Outlet)	Input cap (Side Outlet)	Input cap (Straight Outlet)	Input cap (Side Outlet)
9540178	9540179	1m 9540181 2m 9540182	9540183	0.5m 9540184 1m 9540185	9540167	9540168	9540174	9540175	9540176	9540177	9540171	9540172

Gomu 12x20

PRO

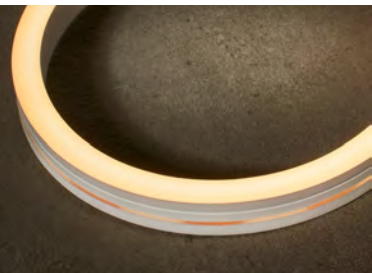

- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

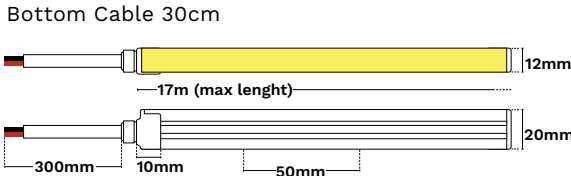

STANDARD

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530017	2700K	10	520	52	<3	50mm	17m ¹	12 x 20mm	12m (DIY cap 10)
9540018	3000K	10	535	54	<3	50mm	17m ¹	12 x 20mm	12m (DIY cap 10)
9530019	4000K	10	560	56	<3	50mm	17m ¹	12 x 20mm	12m (DIY cap 10)
9540019	RGBW-4000K	15	305	20	-	50mm	10m ¹	12 x 20mm	10m (DIY cap 4.8)





¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

COMMON ACCESSORIES			SINGLE COLOR ACCESSORIES						RGBW	
Aluminium Profile 1m	Curved Profile 0.5m	Mounting Clips	DIY W Endcap	DIY W Endcap	Closed Endcap	Closed Endcap with screws	Closed Endcap		Mounting Clips	DIY RGBW Endcap
9540020	9540021	9540022	9530022	9530021	9540025	9530023	9530024		9540045	9540024



- IP44 protection level

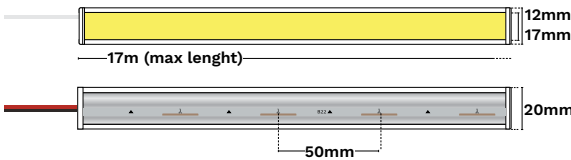

EMBEDDED VERSION - NO PROFILE

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530048	2700K	10	400	40	<3	50mm	17m ¹	12 x 20mm	12m (DIY cap 10)
9540049	3000K	10	410	41	<3	50mm	17m ¹	12 x 20mm	12m (DIY cap 10)
9530050	4000K	10	430	43	<3	50mm	17m ¹	12 x 20mm	12m (DIY cap 10)



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

ACCESSORIES	
Silicone end cap	Silicone closed end cap
9540050	9540051


*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

Gomu 10x10

PRO



- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

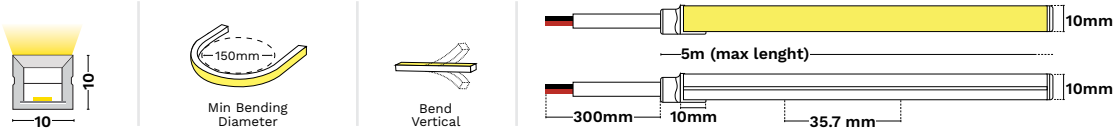

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530051	2700K	10	740	74	<3	35.7mm	5m	10 x 10mm	5m
9540026	3000K	10	750	75	<3	35.7mm	5m	10 x 10mm	5m
9530027	4000K	10	765	77	<3	35.7mm	5m	10 x 10mm	5m




ACCESSORIES						
Plastic Profile 1m	Mounting Clips	Silicone End Cap	Slicone Closed End Cap	Solder Free End Cap	Assembled Closed End Cap	Aluminium bending profile 1m
9540027	9540028	9540029 9530040	9540030 9530041	9530042	9530043	9540422

Kema 8x8 3D

ESSENTIAL



- IP67 protection level
- UV resistance
- Salt solution resistance

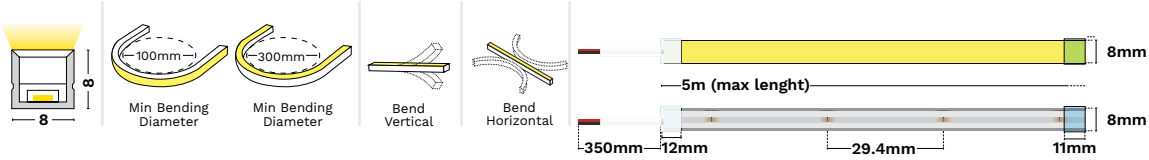

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540123	2700K	6	385	64	29.4mm	5m	8 x 8mm	5m
9540124	3000K	6	390	65	29.4mm	5m	8 x 8mm	5m
9540125	4000K	6	410	68	29.4mm	5m	8 x 8mm	5m



ACCESSORIES				
Aluminium Profile 1m	Mounting Clips	Stainless steel bendable profile 1m	End Cap	Input cap (Straight Outlet)
9540126	9540127	9540128	9540129	9540131


*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

Kema 6x6

ESSENTIAL



- IP67 protection level
- UV resistance
- Acids & alkalis resistance
- Salt solution resistance

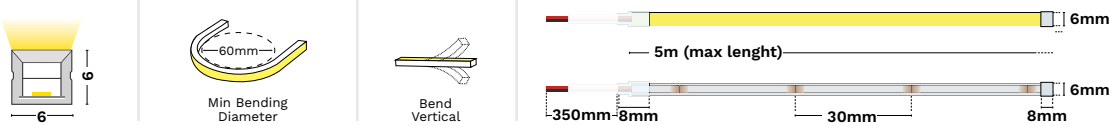

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540114	2700K	8	700	88	30mm	5m	6 x 6mm	5m
9540115	3000K	8	731	91	30mm	5m	6 x 6mm	5m
9540116	4000K	8	756	95	30mm	5m	6 x 6mm	5m




COMMON ACCESSORIES				
Input cap (Straight Outlet)	Input cap (Bottom/ Side Outlet)	End cap	Bracket	Aluminium Profile 1m
9540117	9540118	9540119	9540121	9540122

Kema 4x10

ESSENTIAL



- IP67 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

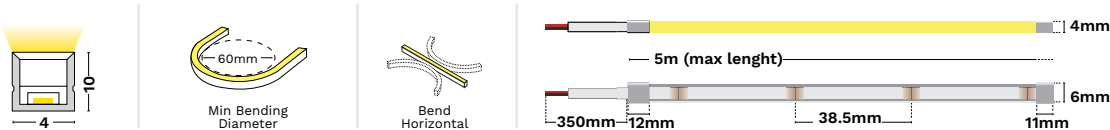

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540107	2700K	10	393	39	38.5mm	5m	4 x 10mm	5m
9540108	3000K	10	425	43	38.5mm	5m	4 x 10mm	5m
9540109	4000K	10	490	49	38.5mm	5m	4 x 10mm	5m



COMMON ACCESSORIES		
Bracket	Aluminium Profile 1m	Aluminium Profile 2m
9540111	9540112	9540113


*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

Kema R18

ESSENTIAL



- IP65 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

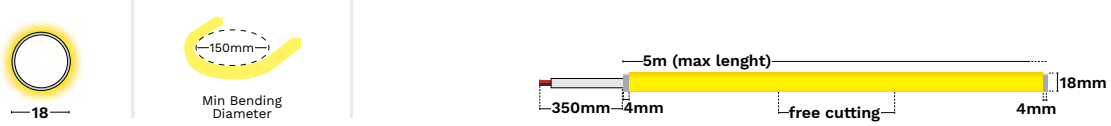


CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540155	3000K	12	766	64	Free	5m	R:18	5m




R18 ACCESSORIES			R23 ACCESSORIES		
Input cap	End cap	Plastic Bracket (clips)	Input cap	End cap	Plastic Bracket (clips)
9540156	9540157	9540158	9540161	9540162	9540163

Kema R23

ESSENTIAL

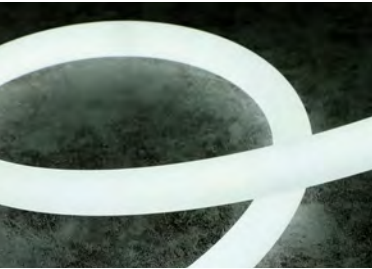

- IP65 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

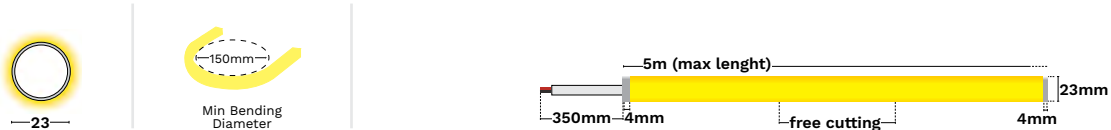

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540159	3000K	14	955	68	Free	5m	R:23	5m





UNDERWATER


- 01. SIDE / TOP BEND OPTIONAL
 - 02. IP68 / IK10 PROTECTION
 - 03. MULTIPLE CCT, DMX / SPI
-

Gomu 16x17

PRO UNDERWATER



- IP68 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

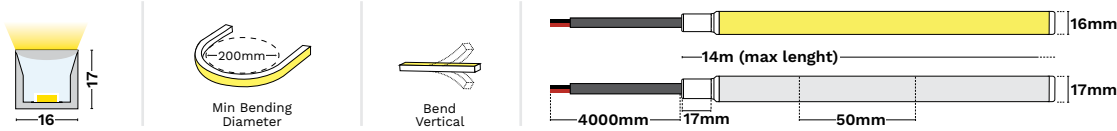

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530052	2700K	10	610	64	<3	50mm	14m ¹	16 x 17mm	14m
9530035	3000K	10	639	64	<3	50mm	14m ¹	16 x 17mm	14m
9530053	4000K	10	670	64	<3	50mm	14m ¹	16 x 17mm	14m
9530054	RGBW-3000K	15	533	35	<3	50mm	14m ¹	16 x 17mm	14m



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.



- IP68 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance



CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9530038	3000K	10	572	57	<3	50mm	14m ¹	16 x 17mm	14m



¹For customized lengths, pricing may vary depending on the number of pieces, lengths, and type of end caps required. Please contact our sales team for detailed information and a personalized offer.

COMMON ACCESSORIES

Plastic
Profile 1m



9530020

Mounting
Clip




9530013

*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524




Kema 16x16

ESSENTIAL

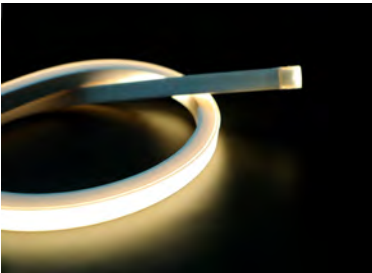

- IP68 protection level
- Salt solution resistance
- UV resistance

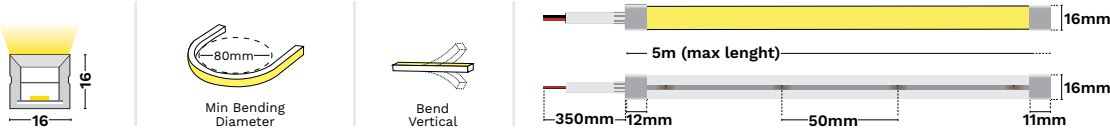

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540132	3000K	14	759	54	50mm	5m	16 x 16mm	5m
9540133	4000K	14	875	63	50mm	5m	16 x 16mm	5m




ACCESSORIES			
Bracket	Aluminium Profile 1m	Aluminium Profile 2m	Aluminium Profile 1m (for intergrated end cap)
9540149	9540151	9540152	9540153

Kema 20x18

ESSENTIAL



- IP68 protection level
- Salt solution resistance
- UV resistance
- SPI

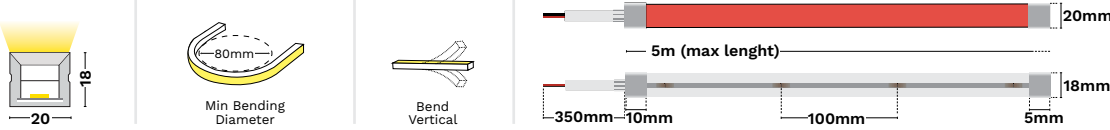

DIGITAL RGBW


CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540134	RGBW-3000K	16	507	32	100mm	5m	20 x 18mm	5m




ACCESSORIES				
Input cap (Straight Outlet)	End cap	Input cap (Bottom/Side Outlet)	Bracket	Aluminium Profile 1m
9540135	9540136	9540137	9540138	9540139

Gomu 16x15

PRO

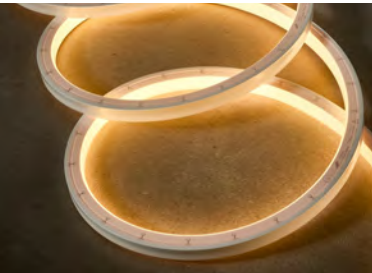

- IP68 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance

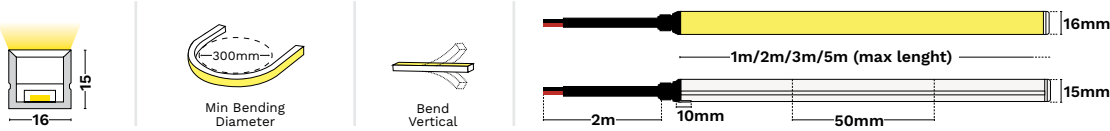

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540035	3000K	10	530	51	50mm	1m	16 x 15mm	1m
9540036	3000K	10	530	51	50mm	2m	16 x 15mm	2m
9540037	3000K	10	530	51	50mm	3m	16 x 15mm	3m
9540038	3000K	10	530	51	50mm	5m	16 x 15mm	5m



ACCESSORIES	
Plastic Profile 1m	Mounting Clips
9540039	9540040



*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

Kema 10x18

ESSENTIAL



- IP68 protection level
- UV resistance

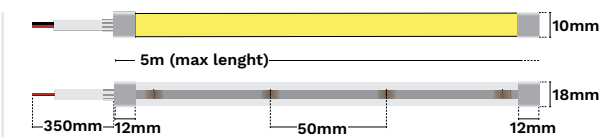

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540141	3000K	14	578	41	50mm	5m	10 x 18mm	5m
9540142	4000K	14	590	42	50mm	5m	10 x 18mm	5m






ACCESSORIES				
End Cap	Bracket	Aluminium Profile	Aluminium Profile (for intergrated end cap) 1m	Stainless steel bendable profile
				
9540178	9540179	1m 9540181 2m 9540182	9540183	0.5m 9540184 1m 9540185

Kema 12x20

ESSENTIAL



- IP68 protection level
- Salt solution resistance
- UV resistance
- SPI

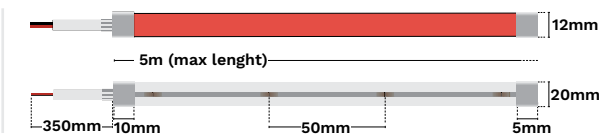

DIGITAL RGBW

CODE	CCT	W/M	LM/M	LM/W	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540143	RGBW-3000K	16	532	33	50mm	5m	12 x 20mm	5m




*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

Gomu 12x20


PRO



- IP68 protection level
- Salt solution resistance
- Acids & alkalis resistance
- UV resistance



Bottom Cable Entry 200cm

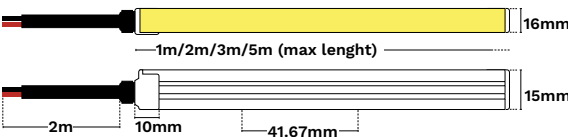

CODE	CCT	W/M	LM/M	LM/W	SDCM	UNIT CUT	REEL	DIMENISIONS	MAX L (M)
9540041	3000K	10	389	37	<3	41.67mm	1m	12 x 20mm	1m
9540042	3000K	10	389	37	<3	41.67mm	2m	12 x 20mm	2m
9540043	3000K	10	389	37	<3	41.67mm	3m	12 x 20mm	3m
9540044	3000K	10	389	37	<3	41.67mm	5m	12 x 20mm	5m



ACCESSORIES

Mounting Clips

9540045





LED STRIPS
COB / SMD

LED STRIPS


1. SMD series
2. COB series
3. Silicon series
4. High voltage series
5. High efficiency
6. Broad range of IP protection

Solid

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	12 W/m
VOLTAGE	24Vdc
LEDS/M	288
LEDS DISTANCE	-
CUTTING UNIT	27.77mm
CRI (Ra)	92
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	180°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	5mm

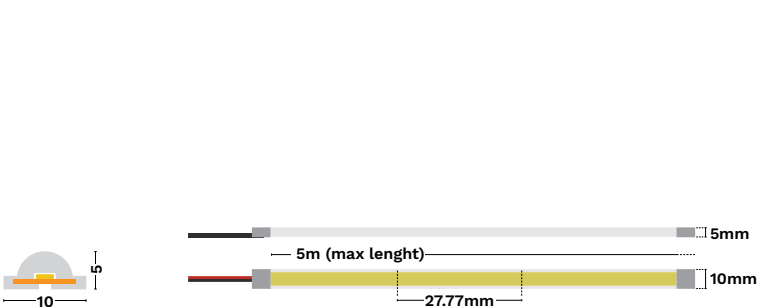


*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

Ten

PRO

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	10 W/m
VOLTAGE	24Vdc
LEDS/M	280
LEDS DISTANCE	-
CUTTING UNIT	25mm
CRI (Ra)	94
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	180°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	6mm

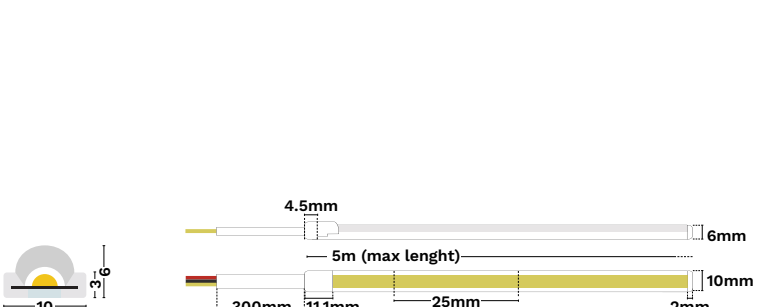




ACCESSORIES		
Mounting Clip	Input Silicone Cap	Silicone closed end cap
9540032	9540033	9540034

Vida

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	COB
POWER	12 W/m
VOLTAGE	24Vdc
LEDS/M	480
LEDS DISTANCE	-
CUTTING UNIT	50mm
CRI (Ra)	91
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	180°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm / 12mm
HEIGHT	2.2mm / 4.5mm




Goro

PRO

BASIC PARAMETERS

TYPE OF CHIP	COB
POWER	10 W/m
VOLTAGE	24Vdc
LEDS/M	480
LEDS DISTANCE	-
CUTTING UNIT	50mm
CRI (Ra)	92
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	180°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	1.8mm



PHOTOMETRIC PARAMETERS				
IP	CODE	CCT	LUMEN/M	LUMEN/W
IP20	9540063	2700K	1016	87
	9540064	3000K	1203	100
	9540065	4000K	1368	114
	9680303	6500K	1400	117
IP65	9540069	2700K	1057	88
	9540070	3000K	1353	113
	9540071	4000K	1156	96
IP68	9540072	2700K	1107	92
	9540073	3000K	1065	89
	9540074	4000K	1356	113

*Common Aluminium profiles can be used for the installation
see page 516-517





Goro COB RGBW PRO

PHOTOMETRIC PARAMETERS				
IP	CODE	CCT	LUMEN/M	LUMEN/W
IP20	9540420	RGBW-3000K	850	53
IP65	9540421	RGBW-3000K	820	51

*Common Aluminium profiles can be used for the installation
see page 516-517

BASIC PARAMETERS	
TYPE OF CHIP	COB
POWER	16 W/m
VOLTAGE	24Vdc
LEDS/M	848 / 820
LEDS DISTANCE	-
CUTTING UNIT	33.3mm
CRI (Ra)	92
SDCM CHIP	N/A
SDCM (final product)	N/A
BEAM ANGLE	180°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	12mm
HEIGHT	1.8mm



*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524





Vida Slim

ESSENTIAL

PHOTOMETRIC PARAMETERS						BASIC PARAMETERS	
POWER	IP	CODE	CCT	LUMEN/M	LUMEN/W	TYPE OF CHIP	COB
4.8W	IP20	9680300	2700K	480	95	POWER	4.8 W/m / 8 W/m
		9680301	3000K	520	108	VOLTAGE	24Vdc
		9680302	4000K	546	114	LEDS/M	320
8W	IP20	9540060	2700K	755	95	LEDS DISTANCE	-
		9540061	3000K	833	105	CUTTING UNIT	50mm
		9540062	4000K	916	115	CRI (Ra)	91
	IP65	9540066	2700K	781	98	SDCM CHIP	<3
		9540067	3000K	867	108	SDCM (final product)	<3
		9540068	4000K	931	116	BEAM ANGLE	180°
		9680304	6500K	940	117	DIMMING TYPE	TRIAC / Dali 2 / 0-10
*Common Aluminium profiles can be used for the installation see page 516-517						LIFETIME	>54000
						WARRANTY	5 Years
						WORKING TEMP	-25°C - 45°C
						MAX LENGHT (single input)	5m
						LENGHT/REEL	5m
						WIDTH	8mm / 10mm
						HEIGHT	2mm / 2.4mm

*Common Aluminium profiles can be used for the installation
see page 516-517





*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

Honor Slim

ESSENTIAL

PHOTOMETRIC PARAMETERS					BASIC PARAMETERS	
IP	CODE	CCT	LUMEN/M	LUMEN/W	TYPE OF CHIP	SMD
IP20	9540088	2700K	910	95	POWER	9.6 W/m
	9540089	3000K	960	100	VOLTAGE	24Vdc
	9540090	4000K	980	102	LEDS/M	120
IP62	9540091	2700K	783	82	LEDS DISTANCE	8.3mm
	9540092	3000K	870	91	CUTTING UNIT	50mm
	9540093	4000K	946	100	CRI (Ra)	93
					SDCM CHIP	<3
					SDCM (final product)	<3
					BEAM ANGLE	120°
					DIMMING TYPE	TRIAC / Dali 2 / 0-10
					LIFETIME	>54000
					WARRANTY	5 Years
					WORKING TEMP	-25°C - 45°C
					MAX LENGHT (single input)	5m
					LENGHT/REEL	5m
					WIDTH	8mm
					HEIGHT	1.4mm / 2.8mm

*Common Aluminium profiles can be used for the installation
see page 516-517



Vida Ultra Slim

ESSENTIAL

PHOTOMETRIC PARAMETERS				
IP	CODE	CCT	LUMEN/M	LUMEN/W
IP20	9680312	3000K	100	700
	9680313	4000K	103	720

*Common Aluminium profiles can be used for the installation
see page 516-517

BASIC PARAMETERS	
TYPE OF CHIP	COB
POWER	7 W/m
VOLTAGE	24Vdc
LEDS/M	384
LEDS DISTANCE	-
CUTTING UNIT	50mm
CRI (Ra)	94
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	5mm
HEIGHT	1.4mm



*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524





Honor

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	14.4 W/m
VOLTAGE	24Vdc
LEDS/M	180
LEDS DISTANCE	5.6mm
CUTTING UNIT	33.3mm
CRI (Ra)	93
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	1.4mm / 2.4mm

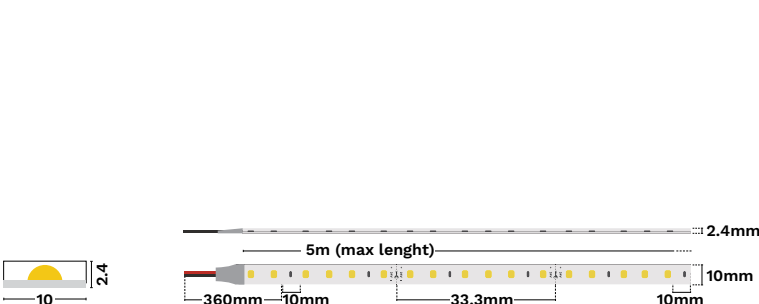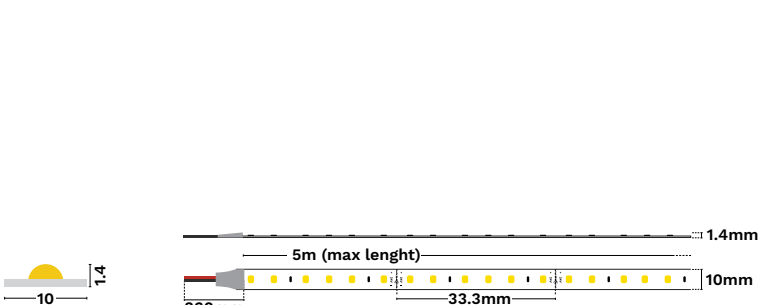


Aktis

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	14.4 W/m
VOLTAGE	24Vdc
LEDS/M	120
LEDS DISTANCE	-
CUTTING UNIT	50mm
CRI (Ra)	93
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	8mm
HEIGHT	2mm

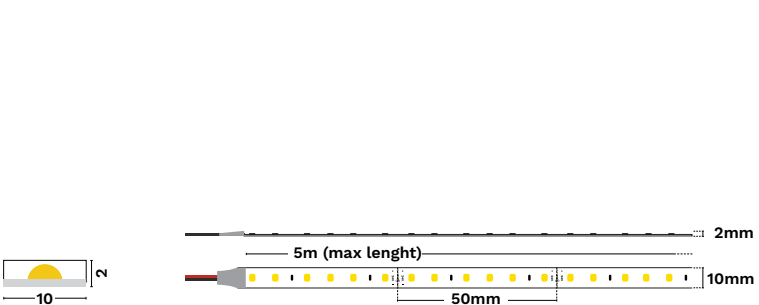


Honor Plus

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	19.2W/m
VOLTAGE	24Vdc
LEDS/M	240
LEDS DISTANCE	4.2mm
CUTTING UNIT	25mm
CRI (Ra)	93
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	1.4mm


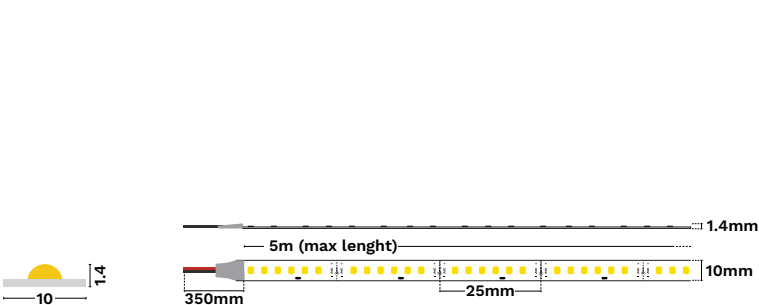


Honor Slim Plus

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	14.4W/m
VOLTAGE	24Vdc
LEDS/M	180
LEDS DISTANCE	-
CUTTING UNIT	33mm
CRI (Ra)	94
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	8mm
HEIGHT	1.4mm

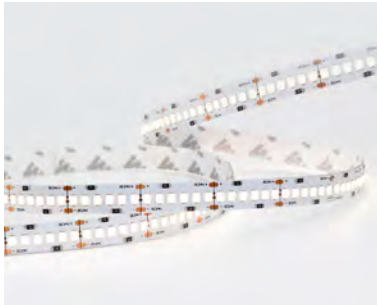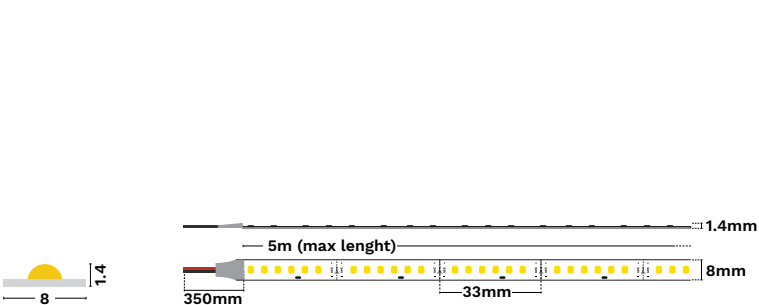

Aktis Plus

ESSENTIAL

PHOTOMETRIC PARAMETERS				
IP	CODE	CCT	LUMEN/M	LUMEN/W
IP20	9540055	3000K	1633	89
	9540056	4000K	1795	98

*Common Aluminium profiles can be used for the installation
see page 516-517


BASIC PARAMETERS	
TYPE OF CHIP	SMD
POWER	19.2 W/m
VOLTAGE	24Vdc
LEDS/M	240
LEDS DISTANCE	-
CUTTING UNIT	25mm
CRI (Ra)	93
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	2mm



COMO HE PRO

BASIC PARAMETERS


TYPE OF CHIP	SMD
POWER	14 W/m
VOLTAGE	24Vdc
LEDS/M	128
LEDS DISTANCE	7.8mm
CUTTING UNIT	62.5mm
CRI (Ra)	92
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	1.4mm



PERFORMANCE HE PRO

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	7 W/m
VOLTAGE	24Vdc
LEDS/M	180
LEDS DISTANCE	5.56mm
CUTTING UNIT	62.5mm
CRI (Ra)	92
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	2.1mm





Free HE

PRO

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	12 W/m
VOLTAGE	24Vdc
LEDS/M	180
LEDS DISTANCE	-
CUTTING UNIT	free
CRI (Ra)	90
SDCM CHIP	<3
SDCM (final product)	<3
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	6mm
HEIGHT	1.4mm

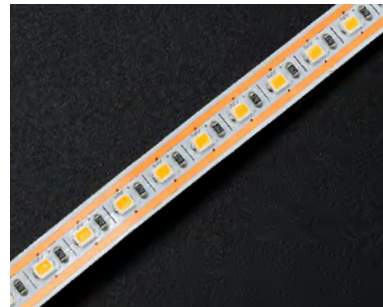



Honor 48V Long

PRO

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	8 W/m
VOLTAGE	DC48V
LEDS/M	130
LEDS DISTANCE	-
CUTTING UNIT	50mm
CRI (Ra)	93
SDCM CHIP	<2
SDCM (final product)	<2
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2 / 0-10
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	50m
LENGHT/REEL	50m
WIDTH	10mm / 12mm
HEIGHT	1.4mm / 2.4mm




*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

Honor High Voltage

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	COB
POWER	9 W/m
VOLTAGE	220-230V
LEDS/M	120
LEDS DISTANCE	-
CUTTING UNIT	1000mm
CRI (Ra)	80
SDCM CHIP	<5
SDCM (final product)	<5
BEAM ANGLE	120°
DIMMING TYPE	N/A
LIFETIME	>34000
WARRANTY	2 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	50m
LENGHT/REEL	50m
WIDTH	14mm
HEIGHT	4.5mm

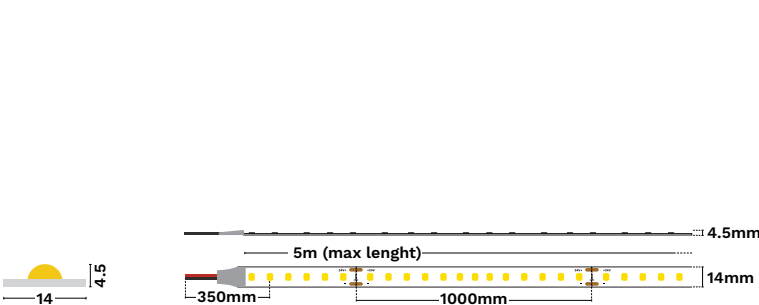

ACCESSORIES

WATERPROOF INPUT PLUG WITH 30CM CABLES
FOR 230V SMD
10MM PCB
2PIN, MAX CURRENT: 6A




9680314

Vida High Voltage

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	COB
POWER	8 W/m
VOLTAGE	220-230V
LEDS/M	288
LEDS DISTANCE	-
CUTTING UNIT	1000mm
CRI (Ra)	70
SDCM CHIP	<5
SDCM (final product)	<5
BEAM ANGLE	120°
DIMMING TYPE	N/A
LIFETIME	>34000
WARRANTY	2 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	50m
LENGHT/REEL	50m
WIDTH	12mm
HEIGHT	6mm

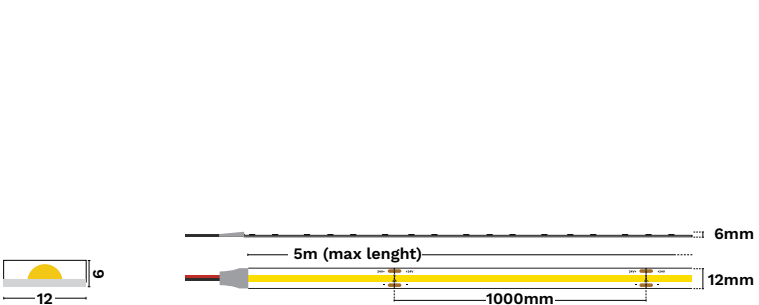

ACCESSORIES

WATERPROOF INPUT PLUG WITH 30CM CABLES
FOR 230V SMD
10MM PCB
2PIN, MAX CURRENT: 6A




9680314

D2W

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	SMD
POWER	10 W/m
VOLTAGE	24Vdc
LEDS/M	168
LEDS DISTANCE	-
CUTTING UNIT	83mm
CRI (Ra)	90
SDCM CHIP	<5
SDCM (final product)	<5
BEAM ANGLE	120°
DIMMING TYPE	TRIAC / Dali 2
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	2.1mm





TW

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	SMD2835/3527
POWER	19.2 W/m
VOLTAGE	24Vdc
LEDS/M	120
LEDS DISTANCE	-
CUTTING UNIT	50mm
CRI (Ra)	80
SDCM CHIP	<5
SDCM (final product)	<5
BEAM ANGLE	120°
DIMMING TYPE	Dali 2
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	10mm
HEIGHT	2.1mm



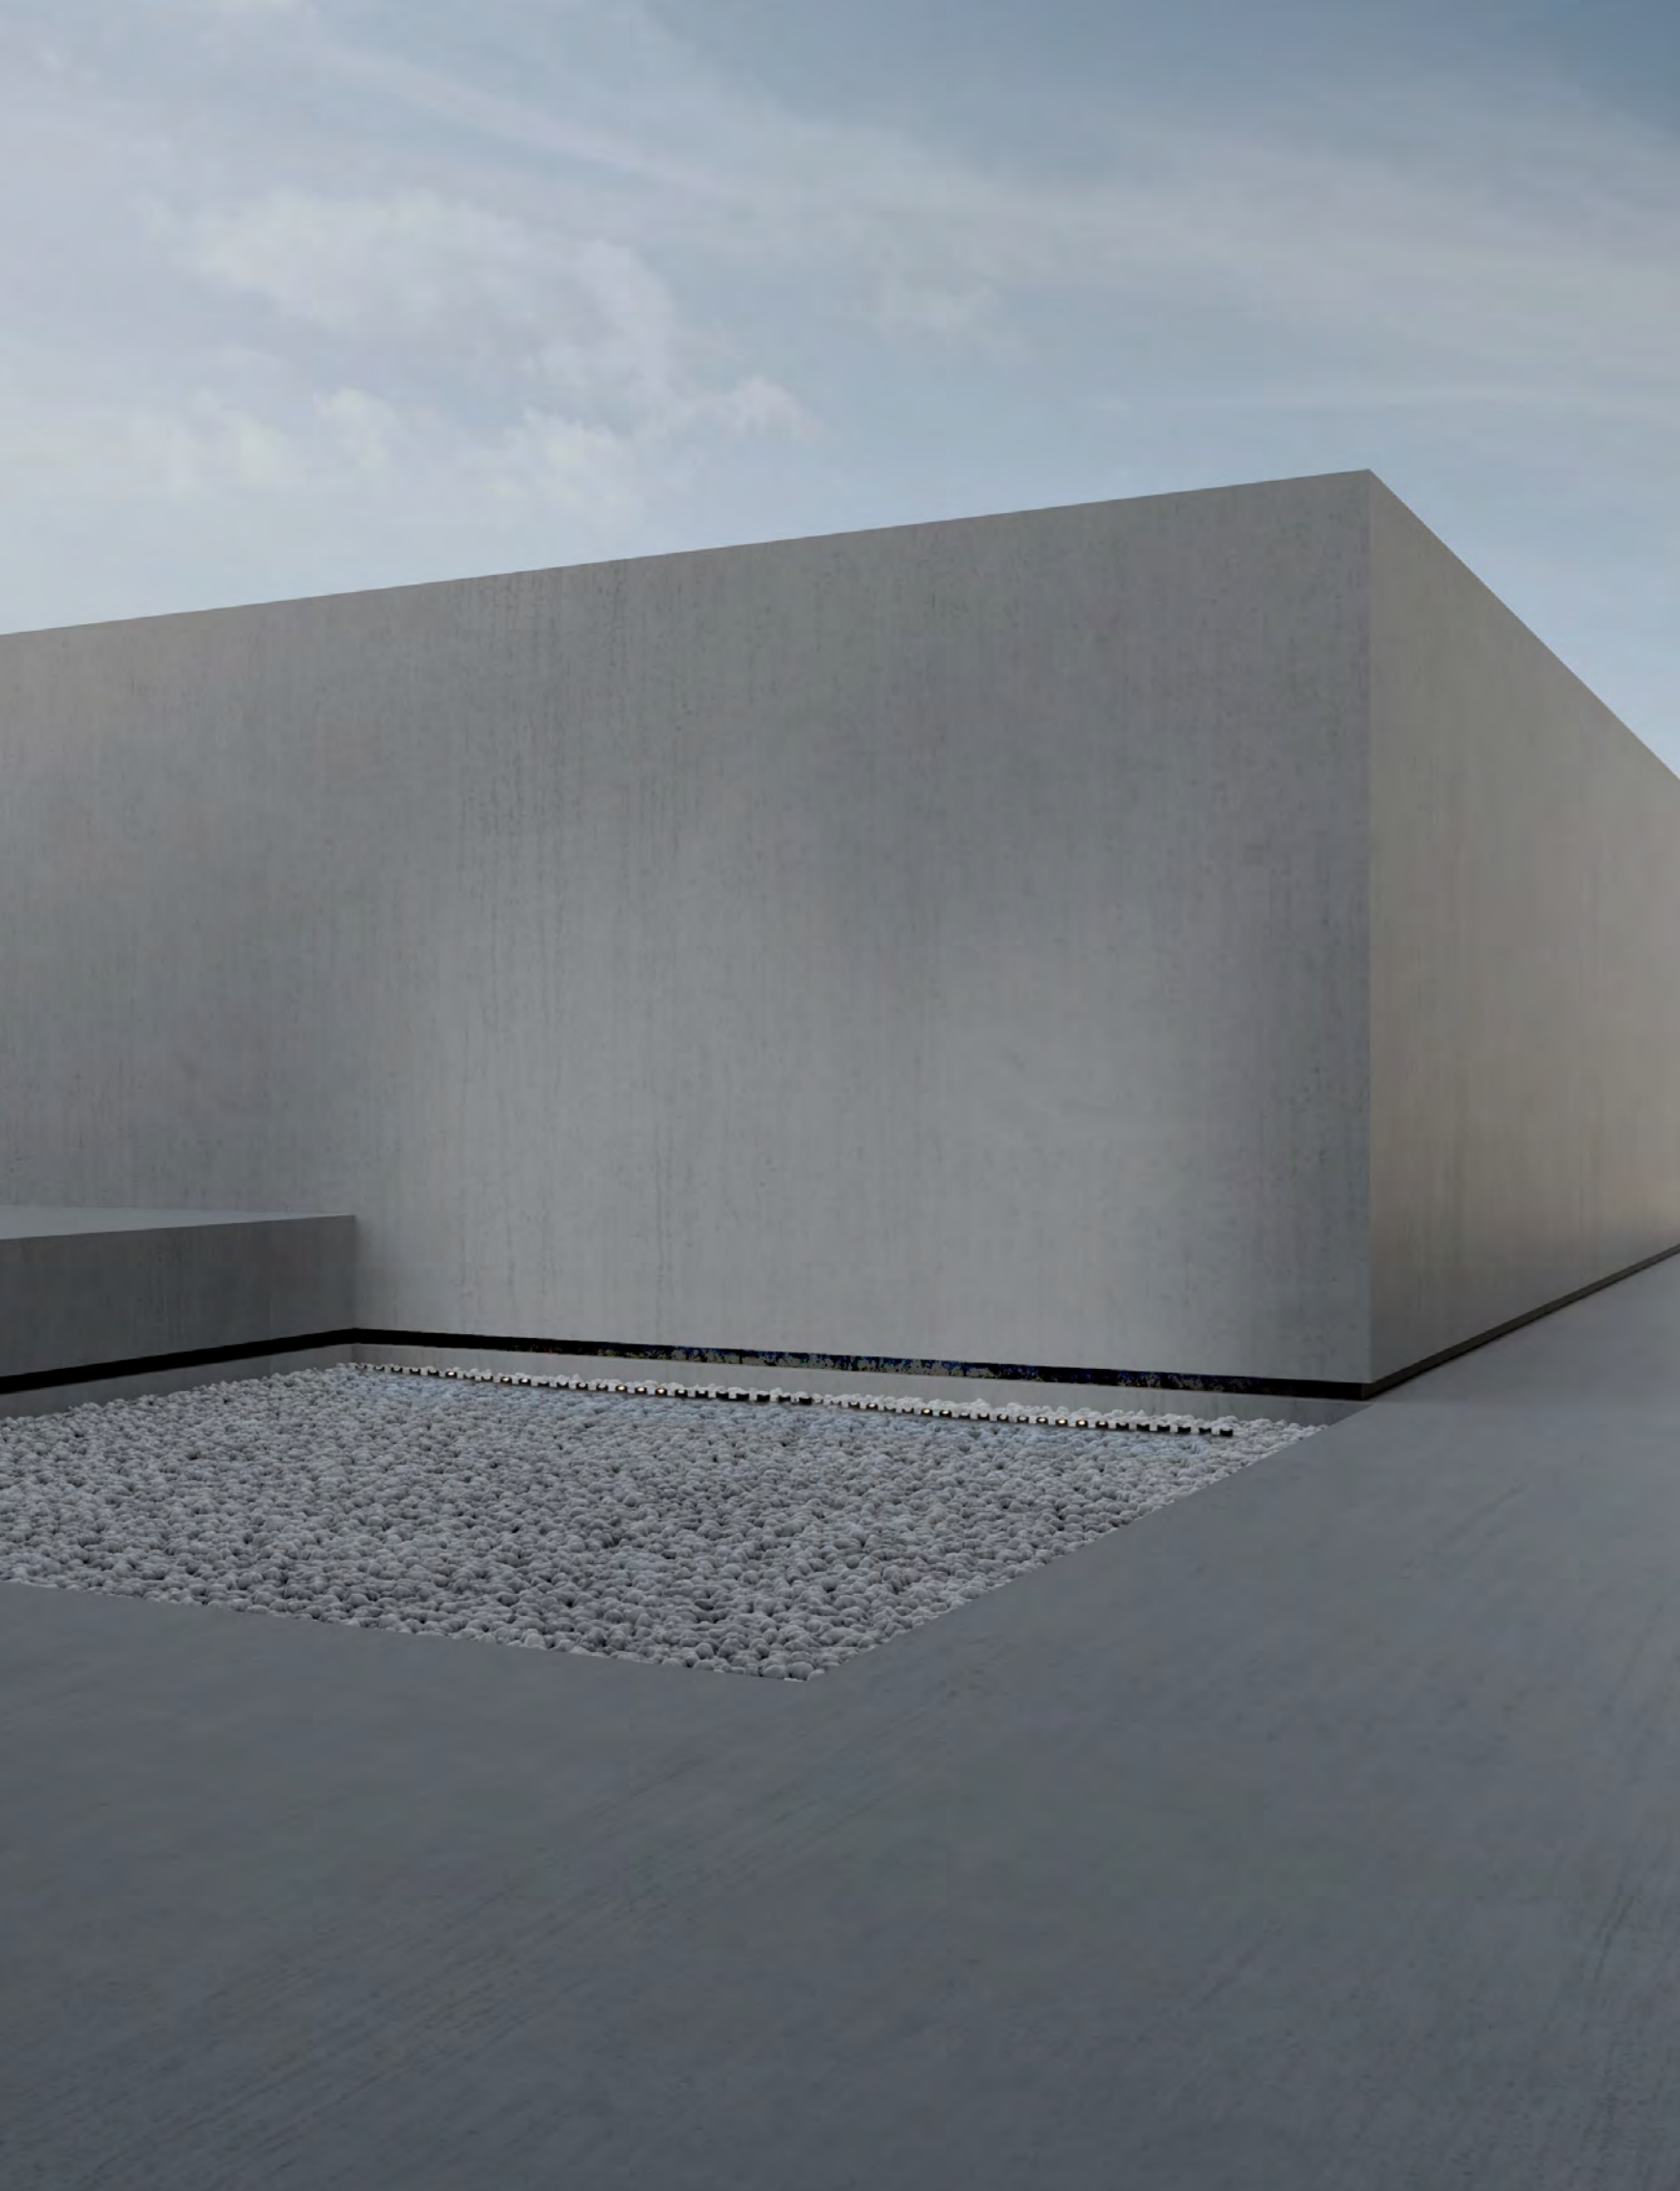

SILICON WALLWASHERS


-
1. Silicon
 2. IP67 protection
 3. High efficiency
 4. Variety of beam angles

Bine

ESSENTIAL

BASIC PARAMETERS

TYPE OF CHIP	COB
POWER	25 W/m
VOLTAGE	24Vdc
LEDS/M	24
LEDS DISTANCE	-
CUTTING UNIT	41.6mm
CRI (Ra)	94
BEAM ANGLE	30°
DIMMING TYPE	TRIAC / Dali 2
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	5m
LENGHT/REEL	5m
WIDTH	24mm
HEIGHT	18mm

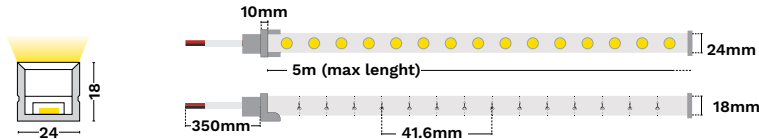

ACCESSORIES				
Aluminum profile 1m	Stainless steel bendable profile 0.5m	Aluminum clips	Tail cap	End Cap
				
9540077	9540078	9540079	9540080	9540081


Diamond

PRO

BASIC PARAMETERS

PHOTOMETRIC PARAMETERS					
POWER	IP	CODE	CCT	LUMEN/M	LUMEN/W
40W	IP67	9540084	3000K	3314	83
		9540085	4000K	3326	83
80W	IP67	9540082	3000K	6628	83
		9540083	4000K	6653	83

TYPE OF CHIP	SMD
POWER	40W / 80W
VOLTAGE	24Vdc
LEDS/M	20
LEDS DISTANCE	-
CUTTING UNIT	50mm
CRI (Ra)	83
BEAM ANGLE	20°
DIMMING TYPE	TRIAC / Dali 2
LIFETIME	>54000
WARRANTY	5 Years
WORKING TEMP	-25°C - 45°C
MAX LENGHT (single input)	7.2m
LENGHT/REEL	1.2m / 2.4mm
WIDTH	22mm
HEIGHT	29.8mm

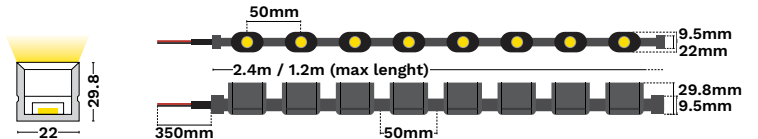

ACCESSORIES		
Aluminum clips	Mounting KIT	Stainless steel bendable profile 1.2m
		
9540086	9540087	9680305

*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524

SURFACE



13x7 surface
9254100



Thickness: 1.3mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips



15x10 surface
9254101



Thickness: 0.9-1.0mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips



17x7 surface
9254103



Thickness: 0.9-1.0mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips



23x10 surface
9254106



Thickness: 0.9-1.0mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips

CORNER SURFACE



16x16 corner surface
9254105



Thickness: 0.9-1.0mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips

RECESSED



15x10 recessed
9254102



Thickness: 0.9-1.0mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips




17x7 recessed
9254104



Thickness: 0.9-1.0mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips




23x10 recessed
9254107




Thickness: 0.9-1.0mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• 4pcs clips


TRIMLESS

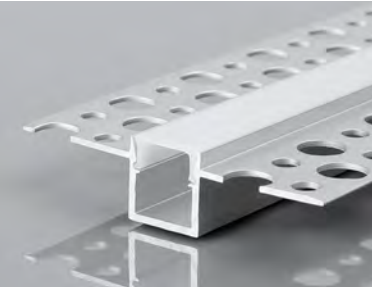

55x13 trimless
9254108




Thickness: 1.1-1.2mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• No clips

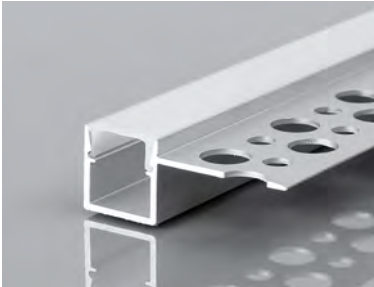


35x13 trimless
9254109



Thickness: 1.1-1.2mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• No clips

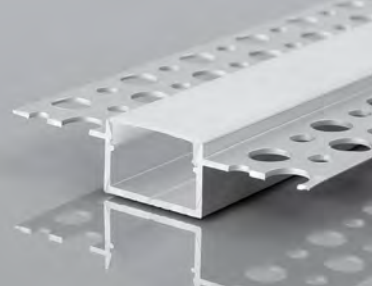


60x13 trimless
9254110



Thickness: 1.2mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• No clips



40x13 trimless
9254111



Thickness: 1.2mm
included:
• 2m aluminum profile
• 2m milky PC cover
• 4pcs end caps
• No clips

COMPATIBILITY

	SURFACE				CORNER	RECESSED			TRIMLESS			
	13x7	15x10	17x7	23x10	16x16	15x10	17x7	23x10	55x13	35x13	60x13	40x13
SOLID IP67		●	●	●	●	●	●	●	●	●	●	●
ONE IP65		●	●	●	●	●	●	●	●	●	●	●
VIDA IP20	●	●	●	●	●	●	●	●	●	●	●	●
VIDA IP65		●	●	●		●	●	●			●	●
VIDA IP68		●	●	●		●	●	●			●	●
GORO IP20	●	●	●	●	●	●	●	●	●	●	●	●
VIDA SLIM IP20	●	●	●	●	●	●	●	●	●	●	●	●
VIDA SLIM IP65	●	●	●	●	●	●	●	●	●	●	●	●
HONOR SLIM IP20	●	●	●	●	●	●	●	●	●	●	●	●
HONOR SLIM IP62	●	●	●	●	●	●	●	●	●	●	●	●
HONOR IP20	●	●	●	●	●	●	●	●	●	●	●	●
HONOR IP62	●	●	●	●	●	●	●	●	●	●	●	●
AKTIS IP20	●	●	●	●	●	●	●	●	●	●	●	●
HONOR PLUS IP20	●	●	●	●	●	●	●	●	●	●	●	●
HONOR SLIM PLUS IP20	●	●	●	●	●	●	●	●	●	●	●	●
AKTIS PLUS IP20	●	●	●	●	●	●	●	●	●	●	●	●
COMO HE IP20	●	●	●	●	●	●	●	●	●	●	●	●
PERFORMANCE HE IP20	●	●	●	●	●	●	●	●	●	●	●	●
FREE HE IP20	●	●	●	●	●	●	●	●	●	●	●	●
HONOR HIGH VOLTAGE IP65			●	●			●	●			●	●
VIDA HIGH VOLTAGE IP65			●	●			●	●			●	●
D2W IP20	●	●	●	●	●	●	●	●	●	●	●	●
TW IP20		●	●	●		●	●	●			●	●

LED DRIVERS

IP20

BASIC PARAMETERS

INPUT VOLTAGE	180-264Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,99
OUTPUT VOLTAGE	24Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	100.000h
WARRANTY	5 years

BASIC PARAMETERS

INPUT VOLTAGE	200-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,99
OUTPUT VOLTAGE	24Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	100.000h
WARRANTY	5 years

BASIC PARAMETERS

INPUT VOLTAGE	180-264Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,98
OUTPUT VOLTAGE	24Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	Dali 2/ Push / 1-10V
NOMINAL LIFETIME	100.000h
WARRANTY	5 years
AUXILIARY	DC12V

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9840110	30W	1.25A	12.9x5x1.35	86%
9840100	60W	2.5A	16x5.75x1.8	87%
9840101	100W	4.2A	18.5x6.35x2.2	92%



MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9840111	150W	6.25A	28.9x4.8x3	93%
9840112	200W	8.3A	32.9x4.8x3	93%



MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9840102	80W	3.4A	24.15x4.8x3	91%
9840103	150W	6.25A	28.15x4.8x3	92%
9840104	200W	8.3A	32.15x4.8x3	93%



48Vdc Ledstrips

MODEL	OUTPUT POWER	OUTPUT CURRENT	OUTPUT VOLTAGE	DIMENSIONS (cm)
9621501	100W	2.3A	48Vdc	12.9x9.7x3
9621503	200W	4.4A	48Vdc	21.5x11.5x3



RGBW/DMX DRIVER

MODEL	OUTPUT POWER	OUTPUT CURRENT	OUTPUT VOLTAGE	DIMENSIONS (cm)	DIMMING
9844147	150W	6.25A	24Vdc	35.2x4.3x3	DMX512/ RDM/ DALI 2/ PUSH

LED DRIVERS

IP67

BASIC PARAMETERS

INPUT VOLTAGE	200-277Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,96
OUTPUT VOLTAGE	24Vdc
PST	<1
SVM	<0,4
IP	67
DIMMABLE	On/Off
NOMINAL LIFETIME	70.000h
WARRANTY	5 years

BASIC PARAMETERS

INPUT VOLTAGE	108-305Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,99
OUTPUT VOLTAGE	24Vdc
PST	<1
SVM	<0,4
IP	67
DIMMABLE	Dali 2/ Push
NOMINAL LIFETIME	100.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9840106	75W	3.13A	13.8x6.3x3.2	88%
9840107	100W	4.17A	15.3x6.3x3.2	89%
9840108	150W	6.25A	18.6x6.3x3.2	90%
9840109	200W	8.33A	19.9x6.3x3.7	93%
9840113	250W	10.4A	19.9x6.3x2.7	93%
9840114	320W	13.3A	23x6.8x3.7	94%
9840115	400W	16.67A	24.4x8.3x4	94%



MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9840105	150W	6.25A	21.4x6.8x3.8	93%



48Vdc Ledstrips

MODEL	OUTPUT POWER	OUTPUT CURRENT	OUTPUT VOLTAGE	DIMENSIONS (cm)
9621505	100W	1.1A	48Vdc	18x6.3x.55
9621507	200W	2.4A	48Vdc	24.4x7.1x3.75



*For all outdoor product connections, the use of IP68-rated connectors is highly recommended to ensure proper protection against moisture and dust. Failure to use IP68 connectors may void the product warranty due to improper installation practices. See page 524



RF REMOTE CONTROLLERS

Remote controllers must be used in combination with controllers 9080103 and 9080104 for proper operation.

MODEL	CONTROL	W. MODE	OUTPUT VOLTAGE	LINE OF SIGHT	DIMENSIONS
9080101	DIM (4 Zones)	RF 2.4Hz	3Vdc	30m	5.8x10.4x0.9
9080102	RGBW (4 Zones)	RF 2.4Hz	3Vdc	30m	5.8x10.4x0.9



CONTROLLERS

MODEL	CONTROL MODE	W. MODE	OUTPUT VOLTAGE	POWER	DIMENSIONS
9080103	DIM	RF 2.4GHz	2-4Vdc	240W	9.1x3.7x2.1
9080104	DIM/ CCT/ RGB/ RGBW	RF 2.4GHz	2-4Vdc	288W	9.1x3.7x2.1



CASAMBI CONTROLLERS

MODEL	CONTROL MODE	W. MODE	INPUT VOLTAGE	POWER	CHANNELS	DIMENSIONS
9621580	PWM	Bluetooth	12-24Vdc	240W	5	10x4.7x2.25
9621581	PWM	Bluetooth	12-24Vdc	144W	4	7.3x3x1.8



CASAMBI TOUCH DIMMER

MODEL	W. MODE	DESCRIPTION	DIMENSIONS
9621585	Bluetooth	Casambi Controller Touch dimmer with light control, mahogany, black switch	7.3 x 6.2



DMX CONTROLLERS

Controller 9090100 must be used as the primary unit and operated in conjunction with controller 9090101 to ensure proper system functionality.

MODEL	CONTROL MODE	INPUT VOLTAGE	OUTPUT VOLTAGE	CONTROL	APPLICATION	DIMENSIONS
9090100	DMX512/SPI	100-240Vac	5Vdc	Main control	Addressable strips	28.5x15.6x4.4
9090101	DMX512	100-240Vac	5Vdc	DMX512 sub-control	DMX512	25.3x13.7x4.5

Connectors



CODE	TYPE	MAX I	IP	LED TYPE	DIMENSIONS
9680315	Board to Board (8 in 1 type)	5A	IP20	-	8mm PCB
9680316	Board to Board (8 in 1 type)	5A	IP20	-	10mm PCB



CODE	TYPE	MAX I	IP	LED TYPE	DIMENSIONS
9680323	PCB to PCB Linear	5A	IP20	SMD/COB	8mm
9680325	PCB to PCB Linear (with wire)	5A	IP20	SMD/COB	8mm
9680327	PCB to PCB Linear	5A	IP20	SMD/COB	10mm
9680329	PCB to PCB Linear	6A	IP20	SMD/COB	10mm
9680321	PCB to PCB Linear	6A	IP65/67/68	SMD/COB	10mm



CODE	TYPE	MAX I	IP	LED TYPE	DIMENSIONS
9680326	L Corner	5A	IP20	SMD/COB	8mm
9680330	L Corner	5A	IP20	SMD/COB	10mm
9680319	L Corner	-	IP65/67/68	SMD/COB	8mm
9680320	L Corner	-	IP65/67/68	SMD/COB	10mm



CODE	TYPE	MAX I	IP	LED TYPE	DIMENSIONS
9680324	PCB Input	5A	IP20	SMD/COB	8mm
9680328	PCB Input	5A	IP20	SMD/COB	10mm
9680322	PCB Input	6A	IP65/67/68	SMD/COB	10mm



CODE	TYPE	MAX I	IP	LED TYPE	DIMENSIONS
9680317	End Cap	-	IP65/67/68	SMD/COB	8mm
9680318	End Cap	-	IP65/67/68	SMD/COB	10mm

DRIVERS &
ACCESSORIES
522-----537

Pages

CONNECTORS	Page 524-525
CC LED DRIVERS	Page 526-537
CONTROLLERS	Page 537

CONNECTORS

IP68



BASIC PARAMETERS

CODE	9091001
MODEL	3pin
AMPERE / VOLTAGE	17.5A 450Vac
TEMPERATURE	-40-105°C
FIRE RETARDANT LEVEL	V2
CROSS SECTION	0.5 ~1.5 mm²
CABLE DIAMETER	5-9mm



BASIC PARAMETERS

CODE	9091000
MODEL	3pin quick connector
AMPERE / VOLTAGE	24A 450Vac
TEMPERATURE	T105
FIRE RETARDANT LEVEL	V2
CROSS SECTION	0.5 ~2.5 mm²
CABLE DIAMETER	2xM20s (6-11mm)*



*Suitable for rubber round wire only



BASIC PARAMETERS

CODE	9091002
MODEL	3pin quick connector
AMPERE / VOLTAGE	24A 450Vac
TEMPERATURE	T105
FIRE RETARDANT LEVEL	V2
CROSS SECTION	0.5 ~2.5 mm²
CABLE DIAMETER	3xM20s (6-11mm)*



*Suitable for rubber round wire only



BASIC PARAMETERS

CODE	9091004
MODEL	3PIN
AMPERE / VOLTAGE	24A 450Vac
TEMPERATURE	T100
FIRE RETARDANT LEVEL	V2
CROSS SECTION	0.5 ~ 4 mm²
CABLE DIAMETER	3xM25 (4-8mm)*



*Suitable for rubber round wire only



BASIC PARAMETERS

CODE	9091003
MODEL	-
AMPERE / VOLTAGE	24A 450Vac
TEMPERATURE	-40-105°C
FIRE RETARDANT LEVEL	V2
CROSS SECTION	0.5 ~ 2.5 mm²
CABLE DIAMETER	3xM25



CC LED DRIVERS

Dali

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9844145	6W	350-700mA	11.9x2.2x2	88%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	2-18Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	Dali 2/ Push Button/ NFC
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9844146	6W	100-450mA	11.9x2.2x2	88%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	9-42Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	Dali 2/ Push Button/ NFC
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9844010	12W	120-350mA	11.9x4x2.1	90%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	9-42Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	Dali 2/ Push Button/ Dip-Switch
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9621523	23W	100-700mA	10.3x3x2.1	92%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	2.5-46Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	Dali 2/ Push Button/ NFC
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9621521	36W	150-900mA	16.3x3x2.1	92%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	2.5-50Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	Dali 2/ Push Button/ NFC
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9621522	44W	300-1050mA	9.75x4.4x2.3	92%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	2.5-45Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	Dali 2/ Push Button/ NFC
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

CC LED DRIVERS

Triac

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9621520	7W	350-500mA	12.2x4.1x2.3	88%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	7-13Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	Triac/ Dip-Switch
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9844008	12W	150-400mA	14.1x4.6x2.7	88%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	9-42Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	Triac/ Dip-Switch
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9844019	20W	250-500mA	14.1x4.6x2.7	88%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	9-42Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	Triac/ Dip-Switch
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

CC LED DRIVERS

Tunable White DT8

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9844002	30W	400-750mA	14.1x4.6x2.7	88%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	9-42Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	Triac/ Dip-Switch
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

CC LED DRIVERS

Tunable White DT8

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9621519	15W	100-700mA	12.8x3x2.1	87%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,91
OUTPUT VOLTAGE	2.5-46Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	Dali 2/ Push Button
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

CC LED DRIVERS

On/Off

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9889134	2W	500mA	-	73%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,5
OUTPUT VOLTAGE	3-4Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	30.000h
WARRANTY	3 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9020172	6W	500mA	5.8x2.85x2.1	73%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,5
OUTPUT VOLTAGE	6-12Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9097023	3W	700mA	4.7x2.3x2.1	68%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,5
OUTPUT VOLTAGE	2.5-4.5Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9030471	6W	250mA	4.8x2.7x2.1	80%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	12-24Vdc
PST	<1
SVM	<0,4
IP	65
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9020170	4W	350mA	3.8x2.7x2.1	75%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,5
OUTPUT VOLTAGE	3-12Vdc
PST	<1
SVM	<0,4
IP	65
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9030686	6W	350mA	5.81x2.85x2.1	76%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,7
OUTPUT VOLTAGE	8-20Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

CC LED DRIVERS

On/Off

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9030470	6W	250mA	8x2.2x2.1	83%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,55
OUTPUT VOLTAGE	16-24Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9030968	8W	200mA	9.2x3.6x2.5	80%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	27-40Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9540262	8W	220mA	9.2x3.6x2.5	80%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	27-40Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9540261	8W	150mA	9.2x3.6x2.5	78%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	27-42Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9030671	8W	350mA	10x3.82x2.5	78%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	12-24Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9020174	9W	350mA	6x3.4x2.35	81%
				

BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,8
OUTPUT VOLTAGE	15-26Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

CC LED DRIVERS

On/Off

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9030472	9W	350mA	8.6x3.2x2.3	80%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	15-25Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
6001	10W	250mA	8.8x7.9x2.2	87%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,5
OUTPUT VOLTAGE	32-40Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9712102	10W	250mA	8.8x7.9x2.2	87%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,5
OUTPUT VOLTAGE	32-40Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9011763	10W	250mA	8.8x7.9x2.2	87%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,5
OUTPUT VOLTAGE	32-40Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9020171	10W	500mA	8.8x7.9x2.2	73%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,9
OUTPUT VOLTAGE	12-24Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9030969	12W	300mA	10x3.8x2.5	81%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,9
OUTPUT VOLTAGE	24-42Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

CC LED DRIVERS

On/Off

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9020173	13W	350mA	-	73%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,85
OUTPUT VOLTAGE	25-42Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9540264	21W	500mA	10.2x3.82x2.5	85%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	27-42Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9540263	15W	350mA	10.2x3.82x2.5	84%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,95
OUTPUT VOLTAGE	27-42Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
9020176	25W	350mA	12.2x4.28x2.4	73%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,9
OUTPUT VOLTAGE	30-60Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

MODEL LIST

MODEL	OUTPUT POWER	OUTPUT CURRENT	DIMENSIONS (cm)	EFFICIENCY
64001	20W	500mA	8.8x7.9x2.2	87%



BASIC PARAMETERS

INPUT VOLTAGE	220-240Vac
INPUT FREQUENCY	50/60 Hz
INPUT PF	0,9
OUTPUT VOLTAGE	32-40Vdc
PST	<1
SVM	<0,4
IP	20
DIMMABLE	On/Off
NOMINAL LIFETIME	50.000h
WARRANTY	5 years

CONTROLLERS

CASAMBI

MODEL	CONTROL MODE	W. MODE	INPUT VOLTAGE	POWER	CHANNELS	CONNENCTION	DIMENSIONS (cm)
9621582	Dali	Bluetooth	100-240Vac	-	1	max 25 Dali Drivers	2.7x1.6x2.2
9621583	Triac	Bluetooth	220-240Vac	3-300W	1	max 300W Triac Loads	5.15x4.75x3.1
9621584	Dali or 0-10V	Bluetooth	220-240Vac	-	1	1 Dali driver or 1 0-10V driver	5.6x3.5x2.2
9621586	Triac	Bluetooth	220-240Vac	100W	1	max 1 Triac Load (Iin max 0.6A)	4.04x3.63x1.4

INDEX

Pages

538-----549

ALPHABETICAL INDEX	Page 540-527
CODE INDEX	Page 542-547
PICTOGRAMS	Page 548-549

ALPHABETICAL INDEX

#	2 WIRES TRACKS	392	COLOSIO	176	F	FATI	150
	4 WIRES TRACKS	384		192		FELLER	67
#	5MM	242-251	COMET	504		FLAT	262-271
				119		FLIX	393
A	CONTRA	192	CORTIS	94		FREE HE	506
	CONZA	132-133		447	G		
A	ADO	39	COSIO	179		GAL	400
	AKIRA	110		197	GARF	170	
A	AKRO	501	COTTO	136		GELI	420
	AKTIS	504		120	GENER	193	
A	AKTIS PLUS	203	CRIB	199		GENT	370
	AKU	41		38	GERMIN	60	
A	AMBRY	437	CYTA	508		GLADE	44
	ANDER	174		445	GLIM	146	
A	ANELLO	173	D2W	41		GLOW	336-345
	ANETO	130	DARMA	160-161	GLYCE	66	
A	ANTALYA	107		126		GOL	134
	AREA	409-411	DELVE	86	GOMU 10x10	474	
A	ATRIUM	196		513	GOMU 12x20	473	
	AVAL		DIAMOND	149	GOMU 12x20 IP68	485	
B				391	GOMU 16x15	471	
	BACULUS	62	DINE	126	GOMU 16x15 IP68	483	
B	BANG	407, 418-419		44-45	GOMU 16x17	468	
	BINARY	190	DIRPNO	61	GOMU 16x17 IP68	480	
B	BINE	516		36	GONI	196	
	BIOLIGHT	396-397	DISS	424-425	GONO	102-103	
B	BLADE	58-59			GORO	491	
	BOLI	126	DOC		GORO COB RGBW	492	
B	BOSTON	177, 194			GOZZANO	197	
	BRAD	119	DOHERTY		GROTTO	444	
B	BRADY	82					
	BREDA	272-285	DOUE				
B	BREE	68					
	BROOK	126-127	DURAN				
B	BUXTON	286-301					
			DUSTPROOF				
C							
			DUSTY				
C	CADMO	114					
	CANDRY	61	EIRIAM	124			
C	CANNOS	173		454			
	CANON	106-107	EL101	454			
C	CANTIA	109		456			
	CARPO	81	EL102	457			
C	CARREE	118		456			
	CEDI	123	EL201	456			
C	CEID	129		455			
	CERIUM	186-188	EL202	455			
C	CERTA	126		457			
	CHROMA	314-323	EL301	36			
C	CIROCCO	413, 416-417		180			
	CIRRUS	54-55	EL401	121,125			
C	CLARITY	90		195			
	COD	91	EL501	195			
C	CODI	420		167			
			EL502	387			
C				414-415			
			ELPACK				
C							
			ELVI				
C							
			EMIRA				
C							
			ENZO				
C							
			ESCA				
C							
			ETHO				
C							
			EURIKA				
C							
			EURONA				
C							

J	JAX	165	NATAL	409	STAL	437					
	JUNO	96		NED		196	STARDUST	119			
				NESSI		195	STEALTH	100-101			
				NIDO		198, 199	STYLE	74			
							SWAN	104			
					SYMMETRIC	324-335					
K	KAMALA	388	O	OBLIO	140-143	T	TAKE	121			
	KEM	421		OBLIVION	56-57		TALUS	52-53			
	KEMA 10x18	472		ONE L	28-29		TANO	450			
	KEMA 10x18 IP68	484		ONE M	26-27		TEN	489			
	KEMA 12x20	484		ONE S	24-25		TEX	128			
	KEMA 16x16	470		ONO	72		TEXTURE	120			
	KEMA 16x16 IP68	482		ORAZIO	201		THINY	45			
	KEMA 20x18	482		OSLO	195		THOMAS	200, 391			
	KEMA 4x10	476		OTIUM	92		TIF LENS	39			
	KEMA 6x6	476		OTTO LENS	48		TINY	35			
	KEMA 8x8	475					TITAN	445			
	KEMA R18	477					TOBIA	133			
	KEMA R23	477					TREE	434			
	KIDO	118					TW	511			
	KORS	385									
L	LARGO	164	P	PABLO	174	U	UHO	64-65			
	LATTERN	451		PARIS	390		ULTRA SLIM	218-229			
	LAVISH	384		PASSAGGIO	408		ULTY	198			
	LAW INOUT	436		PELIA	201		UMBER	442			
	LED PANEL	156,157		PERFECT	154, 155, 181, 184, 185		UNIVERSAL	178			
	LINA	374-377		PERFORMANCE HE	505		UPRAIL	304-313			
	LINEAR HB	443		PETIT	76		URBY	152			
	LOGGIA	34		PICTO	194						
	LONZA	51		PIN	96						
	LOT	179		PLANET	230-241						
	LOX	149		PONGO	390						
	LOYD	194		PRAET	42						
	LUCY	37		PULSE	95						
	LUELA	75		PUNK	119						
	LUISA	167									
	LYRIC	130									
	M	MAO		193	Q		QUAD	126	V	VARO	125
		MARE		192						VESSEL	148
MARUPE		194				VIDA	490				
MEA		115				VIDA HIGH VOLTAGE	509				
MIB		131				VIDA SLIM	494				
MINIAIR		176				VIDA ULTRA SLIM	496				
MINIMAL		204-217				VITALE	137				
MINIONE L		22-23				VULCAN	147				
MINIONE SPECIAL LENS		31									
MINIONE M		20-21									
MINIONE S		18-19									
MINIONE WALLWASHER		30									
MIRE		189									
MNIA		193									
MOAL		118									
MONIQUE	198, 199										
MONVEL	385										
MOR	192										
N	NAMI	200	R	RABIT	433	W	WALL WASHER	430,431			
	NANO	173		RADIUS	144		WANG	388			
	NARROW	428-429		READER	398-399, 401		WEST	386			
	NARUTO	97		REDO	120, 125						
				RENDE	122, 198, 199, 200						
				ROBIN	196						
				ROLLER	169						
				ROLER	389						
	O	OBLO		140-143	S		SAN	197	Z	ZETAN	89
		OBLIVION		56-57			SANCO	70-71		ZEVA	450
ONE L		28-29	SELENE	41		ZIAZA	172				
ONE M		26-27	SENTO	437							
ONE S		24-25	SERO	170							
ONO		72	SHALLOW	252-261							
ORAZIO		201	SINT	393							
OSLO		195	SIRIUS	193							
OTIUM		92	SMART LINA	378-379							
OTTO LENS		48	SOLID	488							
			SOREL	104							
			SPARK	145							
			SPECTRE	175							
			SPEZIA	112-113							

CODE INDEX

6001	535	8016906	57	8254425	370	9010101	283	9010193	274	9010318	274,276
62000	115	8019109	57	8254429	370	9010102	283	9010194	274,275	9010319	274,276
62002	178	8019310	57	8254430	370	9010103	229	9010195	274,275	9010320	229
62004	178	8020001	192	8254441	370	9010104	229	9010200	274,275	9010416	234,235
62018	115	8020002	192	8254442	370	9010105	228	9010201	274,275	9010417	234,235
62019	115	8035601	35	8254443	370	9010106	228	9010202	274,275	9011102	431
62200	115	8038401	407	8254444	370	9010107	283	9010203	274,275	9011130	227
62201	115	8038801	407	8770411	386	9010108	283	9010204	275	9011140	227
62202	115	8039001	407	8770412	386	9010109	240	9010205	275	9011161	430
62221	115	8058001	408	8925201	289	9010110	240	9010206	275	9011162	430
64001	536	8090801	408	8925202	289	9010112	227	9010207	274	9011317	128
72002	178	8125801	35	8925204	289	9010120	227	9010208	274	9011318	128
72004	178	8252001	288	8925216	299	9010130	220,221 222,274	9010209	274	9011319	128
92001	179	8252002	290	8925220	299			9010210	274,276	9011332	192
92002	179	8252003	288	9000351	117	9010138	78,79	9010211	274,276	9011333	192
92003	179	8252003	290	9000352	117	9010139	78,79	9010212	274	9011352	199
94500	115	8252004	297	9006030	180	9010140	78,79	9010213	274	9011353	199
94991	123	8252005	297	9006031	180	9010141	79	9010214	235	9011354	128
94992	123	8252006	297	9006032	180	9010142	79	9010215	234	9011355	128
820001	197	8252007	297	9008801	400	9010143	79	9010219	390	9011356	128
820002	197	8252008	299	9008815	400	9010144	79	9010236	281	9011357	128
820202	200	8252009	299	9009041	306	9010145	78	9010237	281	9011358	119
820203	200	8252010	301	9009042	306	9010146	78	9010238	280	9011359	119
820602	200	8252011	288	9009043	306	9010147	78	9010239	280	9011360	119
820603	200	8252012	290	9009044	306	9010148	78	9010240	280	9011361	124
820608	121	8252013	290	9009045	306	9010160	282	9010241	280	9011362	124
820609	115	8252014	288	9009046	311	9010161	282	9010242	281	9011363	124
820610	115	8252015	288	9009047	311	9010162	283	9010243	281	9011364	124
834801	121	8252016	288	9009048	311	9010163	283	9010244	281	9011365	124
834802	121	8252016	290	9009049	313	9010164	282	9010245	281	9011366	124
834863	194	8252017	288	9009050	313	9010165	282	9010246	281	9011367	124
834864	194	8252025	297	9009051	312	9010166	227	9010247	281	9011368	124
834865	194	8252026	297	9009052	313	9010168	282	9010248	281	9011369	119
834866	194	8252027	297	9009053	313	9010169	282	9010249	280	9011400	195
834867	193	8252028	297	9009054	313	9010170	282	9010250	280	9011401	195
834868	193	8252029	299	9009055	312	9010171	282	9010251	281	9011412	193
998091	198	8252030	301	9009056	311	9010172	283	9010252	281	9011413	193
998092	198	8252032	299	9009057	311	9010173	283	9010253	281	9011452	192
5600601	415	8252034	289	9009058	311	9010174	283	9010254	281	9011453	192
6600801	413	8252035	288	9009059	312	9010175	283	9010300	227	9011454	393
6800201	409	8252037	288	9009060	311	9010176	282	9010301	227	9011455	393
6800202	409	8252038	288	9009061	311	9010177	282	9010302	227	9011464	192
7201201	125	8252039	299	9009062	311	9010178	282	9010303	227	9011465	192
7201202	125	8252040	292	9009063	312	9010179	282	9010304	227	9011475	117
7201401	125	8254401	370	9009064	306	9010180	276	9010305	229	9011476	117
7201402	125	8254402	370	9009065	306	9010181	276	9010306	229	9011477	117
7600601	415	8254406	370	9009066	306	9010182	276	9010307	227	9011478	119
7770407	386	8254407	370	9009067	306	9010183	275	9010308	227	9011479	119
7770408	386	8254411	370	9009068	306	9010184	275	9010309	227	9011480	119
7770442	96	8254412	297	9009069	306	9010185	274	9010310	227	9011481	119
7770443	96	8254413	297	9009070	306	9010186	274	9010311	227	9011482	125
8000502	57	8254414	296	9009071	306	9010187	276	9010312	229	9011483	125
8000503	57	8254415	296	9009072	306	9010188	276	9010313	229	9011484	118
8008801	393	8254416	297	9009073	306	9010189	274,275	9010314	229	9011485	118
8008802	393	8254417	297	9009074	306	9010190	275	9010315	229	9011486	118
8014910	57	8254418	296	9009075	306	9010191	275	9010316	288,292	9011487	118
8016905	57	8254419	296	9010100	283	9010192	274	9010317	288,292	9011488	129

9011489	129	9012181	199	9030669	92	9030884	142,143	9050810	444	9058930	155
9011490	118	9012182	199	9030670	92	9030885	142,143	9050811	444	9058940	155
9011491	118	9012183	199	9030671	532	9030886	142,143	9050812	444	9058950	155
9011492	119	9012184	199	9030672	92	9030887	142,143	9050813	444	9058960	155
9011493	119	9012191	122	9030673	92	9030888	142	9050814	444	9058970	155
9011494	126	9012192	122	9030674	92	9030889	142	9050815	444	9058980	155
9011495	126	9012201	122	9030676	50	9030890	143	9050816	444	9058990	155
9011496	193	9012202	122	9030677	50	9030891	143	9050817	444	9060100	185
9011497	193	9012671	301	9030678	50	9030892	143	9050818	444	9060200	185
9011498	195	9012673	299	9030679	50	9030893	143	9050819	444	9060209	72
9011499	195	9012674	301	9030680	50	9030920	434	9050820	189	9060210	72
9011500	195	9012677	288	9030682	43	9030921	434	9050821	189	9060211	72
9011501	195	9012677	290	9030683	43	9030968	533	9050920	104	9060259	130
9011502	196	9013620	298	9030684	43	9030969	535	9052012	41	9060260	130
9011503	196	9013720	298	9030685	43	9031616	408	9052013	41	9060289	401
9011504	197	9015110	179	9030686	531	9031785	40	9052014	41	9060290	401
9011505	197	9015111	179	9030687	49	9031786	40	9052015	41	9060291	398
9011506	197	9017391	117	9030688	49	9040100	46,47	9052020	62	9060292	398
9011507	197	9017392	117	9030689	49	9040101	46,47	9052021	62	9060300	185
9011508	197	9017402	117	9030690	49	9040102	46,47	9052022	63	9060301	171
9011509	197	9017403	117	9030692	34	9040103	46,47	9052023	63	9060302	171
9011510	197	9017812	35	9030693	34	9040104	47	9052024	62	9060303	171
9011511	197	9019212	418	9030694	34	9040105	47	9052025	62	9060304	171
9011512	197	9019213	418	9030695	34	9040106	47	9052026	63	9060309	167
9011513	197	9020170	530	9030699	163	9040107	47	9052027	63	9060310	167
9011514	199	9020171	534	9030700	163	9040108	47	9052028	173	9060311	167
9011515	199	9020172	531	9030701	163	9040109	47	9052029	173	9060312	167
9011516	199	9020173	536	9030702	163	9040110	47	9052031	173	9060313	167
9011517	195,198	9020174	533	9030729	172	9040111	47	9058100	181	9060314	167
9011518	196	9020176	537	9030730	172	9040112	36	9058101	181	9060315	167
9011519	196	9025201	301	9030731	172	9040113	36	9058102	181	9060316	167
9011520	196	9030031	468	9030732	172	9040114	42	9058103	184	9060400	185
9011521	196	9030410	118	9030770	177	9040115	42	9058104	184	9060500	154
9011522	196	9030411	118	9030771	177	9040116	101	9058105	184	9060600	154
9011523	196	9030412	194	9030772	172	9040117	101	9058106	184	9060700	154
9011531	115	9030413	194	9030773	172	9040118	101	9058107	184	9060800	154
9011538	126	9030414	194	9030784	39	9040119	101	9058108	184	9060950	298
9011539	126	9030415	194	9030785	40	9040120	101	9058109	184	9060960	297
9011540	126	9030416	195	9030874	142	9040121	101	9058110	184	9060970	297
9011541	126	9030417	195	9030874	143	9040122	101	9058111	155	9060980	299
9011542	126	9030418	198	9030786	40	9040123	101	9058112	155	9060990	299
9011543	126	9030419	198	9030787	44	9040124	101	9058113	155	9060991	187
9011544	120	9030420	198	9030788	51	9040125	101	9058114	155	9060992	187
9011545	120	9030421	198	9030789	51	9040126	101	9058115	155	9060993	187
9011546	118	9030422	126	9030790	113	9040127	101	9058116	155	9060994	187
9011547	118	9030423	126	9030791	113	9040128	176	9058117	155	9060995	187
9011761	81	9030424	127	9030792	113	9040129	176	9058118	155	9060996	187
9011762	81	9030425	127	9030793	113	9040130	217	9058119	185	9060997	187
9011763	535	9030426	198	9030794	113	9045418	408	9058120	185	9060998	187
9011765	81	9030427	198	9030795	113	9045514	408	9058121	185	9060999	187
9011851	390	9030428	199	9030796	113	9050702	435	9058122	185	9061000	187
9011852	390	9030429	199	9030797	113	9050703	165	9058123	154	9061001	187
9011861	389	9030430	391	9030798	112	9050704	165	9058124	154	9061002	187
9011862	389	9030431	200	9030799	112	9050731	437	9058125	154	9061003	187
9011871	389	9030470	532	9030870	142	9050732	437	9058126	154	9061004	187
9011872	389	9030471	531	9030871	142,143	9050733	437	9058127 154,155 181,184,185	9061005	188	
9011941	386	9030472	534	9030872	142,143	9050734	437		9061006	188	
9011942	386	9030655	53	9030873	142,143	9050800	153	9058200	181	9062301	385
9011951	386	9030656	53	9030875	142	9050801	153	9058300	184	9062302	385
9011952	386	9030657	53	9030876	142,143	9050802	153	9058400	184	9063609	378
9012121	128	9030659	53	9030877	142,143	9050803	153	9058500	184	9063610	378
9012122	128	9030660	53	9030878	142	9050804	153	9058600	184	9063611	378
9012171	198	9030661	53	9030879	142,143	9050805	444	9058700	184	9063612	378
9012172	198	9030663	55	9030880	142	9050806	444	9058800	184	9065023	104
9012173	198	9030664	55	9030881	142,143	9050807	444	9058900	184	9065121	104
9012174	197	9030665	55	9030882	142,143	9050808	444	9058910	184	9070126	288
9012175	197	9030666	55	9030883	142	9050809	444	9058920	155	9070127	288

9070128	239	9080818	457	9123131	388	9136211	436	9212672	290	9232250	149
9070129	298	9080819	456	9123132	388	9136290	235	9212690	290	9232251	149
9070130	300	9080820	456	9123141	384	9136303	232	9223111	89	9236105	232
9070131	109	9080821	456	9123142	384	9136323	234	9223112	89	9236106	232,233,234 235,292,293
9070132	109	9080822	457	9136100	232	9136323	235	9232111	68		
9070133	109	9080823	457	9136101	235	9136335	232	9232112	68	9236107	232,233
9070134	109	9080824	454	9136105	235	9136338	235	9232113	68	9236323	234,235
9070135	388	9080825	455	9136110	235	9136360	234	9232114	68	9236360	234,235
9070136	388	9088173	193	9136111	232	9136360	235	9232115	59	9248060	170
9070139	91	9088174	193	9136120	238	9136450	432	9232116	59	9248061	170
9070140	168	9090029	31	9136121	238	9136451	432	9232117	59	9248062	170
9070141	108	9090030	31	9136122	241	9136752	432	9232118	59	9248063	170
9070142	108	9090031	31	9136123	241	9136753	432	9232119	59	9248064	152
9070143	108	9090032	31	9136124	239	9146141	240	9232120	59	9248065	152
9070151	108	9090033	30	9136125	239	9146142	240	9232121	89	9248066	152
9070152	108	9090093	21, 23, 23	9136130	238	9146143	238	9232122	89	9248067	152
9070153	108	9090096	27, 29, 29	9136131	238	9146145	238	9232123	90	9248068	152
9070154	80	9090100	520	9136135	240	9146149	239	9232124	90	9248069	152
9070155	80	9090101	520	9136136	240	9174151	118	9232126	104	9248070	82
9070156	387	9090621	136	9136140	240	9174152	118	9232127	104	9248071	82
9070157	387	9090750	450	9136141	240	9174511	197	9232128	90	9248072	82
9070158	387	9090751	450	9136142	240	9174512	197	9232129	90	9248073	82
9070159	387	9090752	450	9136143	238	9175513	198	9232130	96	9248074	82
9070160	387	9090753	450	9136144	238	9175514	198	9232131	96	9248075	82
9070161	387	9090754	450	9136145	238	9184371	195	9232134	86	9248076	82
9070162	168	9090755	450	9136146	238	9184372	195	9232135	86	9248077	82
9071021	61	9090756	450	9136147	241	9184373	195	9232136	86	9248078	82
9071022	61	9090757	451	9136148	241	9184374	195	9232137	86	9252001	292
9072815	88	9090758	451	9136149	239	9188626	417	9232156	104	9252002	292
9075916	88	9091000	524	9136150	239	9193421	384	9232200	94	9252003	292
9076117	88	9091001	524	9136152	297	9193422	384	9232201	94	9252004	292
9079500	134	9091002	524	9136153	297	9193423	384	9232202	94	9252005	293
9079600	131	9091003	525	9136154	297	9193424	384	9232203	94	9252006	293
9079601	131	9091004	525	9136155	297	9193425	384	9232204	95	9252007	293
9080010	229	9091631	136	9136156	297	9193426	384	9232205	95	9252008	293
9080020	229	9097021	39	9136157	297	9193427	384	9232206	95	9252010	292,293
9080100	377	9097022	39	9136158	296	9193429	384	9232207	95	9252011	293
9080101	520	9097023	530	9136159	296	9193431	384	9232208	95	9252012	292,293
9080102	520	9110020	234	9136160	298	9193432	384	9232209	95	9252015	288,290
9080103	520	9110021	234	9136161	298	9193433	384	9232210	95	9254100	516
9080104	520	9110022	234	9136162	301	9193434	384	9232211	95	9254101	516
9080110	377	9110024	234	9136163	301	9193435	384	9232212	59	9254102	516
9080120	376	9110120	39	9136164	298	9193436	384	9232213	59	9254103	516
9080130	376	9110121	44	9136165	299	9193437	384	9232214	59	9254104	516
9080140	376	9110122	51	9136166	299	9193439	384	9232215	59	9254105	516
9080150	376	9110123	51	9136167	297	9193444	392	9232216	59	9254106	516
9080160	376	9110124	112	9136168	299	9193445	392	9232217	59	9254107	516
9080170	376	9110130	38	9136190	241	9193446	392	9232218	67	9254108	517
9080201	35	9110131	38	9136191	241	9193447	384	9232219	67	9254109	517
9080202	35	9110132	38	9136192	241	9193448	384	9232220	67	9254110	517
9080800	446	9110133	38	9136193	239	9193454	392	9232221	67	9254111	517
9080801	446	9110134	35	9136194	239	9193455	392	9232222	67	9310009	443
9080802	446	9110135	35	9136195	285	9193456	392	9232223	67	9310010	443
9080803	446	9110136	35	9136196	285	9193457	384	9232224	67	9310011	443
9080804	447	9110137	35	9136197	285	9193458	384	9232225	67	9310012	443
9080805	447	9111504	200	9136198	283	9203111	419	9232226	67	9310013	445
9080806	447	9111505	200	9136199	283	9203112	419	9232227	67	9310014	445
9080807	447	9111506	200	9136200	285	9203113	418	9232228	67	9310015	445
9080808	447	9112672	288	9136201	284	9203114	420	9232229	67	9310016	445
9080809	447	9112690	288	9136202	229	9203115	437	9232230	67	9310017	445
9080810	454	9113221	200	9136203	229	9203116	420	9232231	67	9310018	445
9080811	455	9113222	200	9136204	229	9203117	421	9232232	67	9310019	445
9080812	455	9113231	390	9136206	436	9203118	421	9232233	67	9310020	445
9080813	455	9113777	81	9136207	436	9203119	433	9232234	67	9310021	445
9080814	455	9113778	81	9136208	436	9203120	428	9232235	67	9310022	445
9080815	455	9118151	385	9136209	436	9203121	428	9232236	67	9350441	125
9080817	456	9118152	385	9136210	436	9203122	429	9232237	67	9350442	125

9350443	121	9492842	354	9492910	365	9540026	474	9540094	498	9540159	477
9350444	121	9492843	354	9492911	365	9540027	474	9540095	498	9540160	375,377
9366461	234	9492844	357	9492912	365	9540028	474	9540096	498	9540161	477
9366461	235	9492845	357	9492913	365	9540029	474	9540097	498	9540162	477
9366462	234	9492846	356	9492915	363	9540030	474	9540098	498	9540163	477
9366462	235	9492846	356	9492916	363	9540031	489	9540099	498	9540164	470
9387001	195	9492847	356	9492917	364	9540032	489	9540100	374	9540165	472
9387002	195	9492849	356	9492918	364	9540033	489	9540101	500	9540166	472
9388901	170	9492850	356	9492919	364	9540034	489	9540102	500	9540167	472
9388902	170	9492851	356	9492920	363	9540035	483	9540103	500	9540168	472
9416977	396	9492852	353	9530011	471	9540036	483	9540104	488	9540169	472
9416978	396	9492853	353	9530012	471	9540037	483	9540105	488	9540170	375
9418425	193	9492854	351	9530013	480	9540038	483	9540106	488	9540171	472
9418426	193	9492855	351	9530014	471	9540039	483	9540107	476	9540173	472
9418501	120	9492856	352	9530015	471	9540040	483	9540108	476	9540174	472
9418502	120	9492857	352	9530016	471	9540041	485	9540109	476	9540175	472
9419470	196	9492858	353	9530017	473	9540042	485	9540110	374	9540176	472
9419471	196	9492859	353	9530019	473	9540043	485	9540111	476	9540177	472
9420481	197	9492860	353	9530020	480	9540044	485	9540112	476	9540178	472,484
9420482	197	9492861	353	9530021	473	9540045	473,485	9540113	476	9540179	472,484
9430124	123	9492862	353	9530022	473	9540046	471	9540114	476	9540180	375
9430125	123	9492863	353	9530023	473	9540047	471	9540115	476	9540181	472,484
9430241	123	9492864	353	9530024	473	9540048	471	9540116	476	9540182	472,484
9430242	123	9492865	353	9530025	471	9540049	473	9540117	476	9540183	472,484
9430551	123	9492866	353	9530026	468	9540050	473	9540118	476	9540184	472,484
9430552	123	9492867	357	9530027	474	9540051	473	9540119	476	9540185	472,484
9441181	194	9492868	357	9530028	468	9540051	473	9540120	374	9540186	504
9441182	194	9492869	356	9530029	468	9540052	491	9540121	476	9540187	504
9441291	177	9492870	356	9530030	468	9540053	499	9540122	476	9540188	505
9441292	177	9492871	356	9530034	491	9540054	499	9540123	475	9540189	505
9460980	390	9492872	353	9530035	480	9540055	502	9540124	475	9540219	120
9460985	390	9492873	355	9530036	491	9540056	502	9540125	475	9540220	120
9492800	349	9492874	356	9530037	489	9540058	471	9540126	475	9540221	60
9492801	349	9492875	351	9530038	480	9540060	494	9540127	475	9540222	60
9492802	351	9492876	352	9530039	489	9540061	494	9540128	475	9540223	60
9492803	351	9492877	351	9530040	474	9540062	494	9540129	475	9540224	60
9492805	350	9492878	351	9530041	474	9540063	490	9540130	374	9540261	533
9492807	352	9492879	353	9530042	474	9540064	490	9540131	475	9540262	532
9492808	352	9492880	353	9530043	474	9540065	490	9540132	482	9540263	536
9492810	351	9492881	353	9530045	471	9540066	494	9540133	482	9540264	537
9492812	351	9492882	353	9530047	471	9540067	494	9540134	482	9540300	74
9492813	351	9492883	353	9530048	473	9540068	494	9540135	482	9540301	74
9492814	351	9492885	356	9530050	473	9540069	490	9540136	482	9540302	148
9492815	351	9492886	360	9530051	474	9540070	490	9540137	482	9540303	148
9492816	354	9492887	360	9530052	480	9540071	490	9540138	482	9540304	148
9492817	355	9492888	360	9530053	480	9540072	490	9540139	482	9540305	144
9492818	355	9492889	360	9530054	480	9540073	490	9540140	374	9540306	145
9492819	357	9492890	363	9530110	97	9540074	490	9540140	375	9540307	145
9492820	357	9492891	363	9530120	97	9540075	514	9540141	484	9540308	145
9492821	353	9492892	363	9530130	97	9540076	514	9540142	484	9540309	146
9492822	353	9492893	363	9530140	97	9540077	514	9540143	484	9540310	146
9492823	353	9492894	363	9540010	471	9540078	514	9540144	470	9540311	151
9492824	353	9492895	363	9540011	471	9540079	514	9540145	470	9540312	151
9492825	353	9492896	364	9540012	468	9540080	514	9540146	470	9540313	188
9492826	353	9492897	364	9540012	471	9540081	514	9540147	470	9540314	188
9492827	353	9492898	364	9540013	471	9540082	515	9540148	470	9540315	188
9492828	353	9492899	364	9540014	471	9540083	515	9540149	470,482	9540316	188
9492830	351	9492900	364	9540015	471	9540084	515	9540150	375	9540317	156
9492832	351	9492901	364	9540016	471	9540085	515	9540151	470,482	9540318	157
9492833	354	9492902	363	9540017	471	9540086	515	9540152	470	9540420	492
9492834	355	9492903	363	9540018	473	9540087	515	9540152	482	9540421	492
9492835	355	9492904	363	9540019	473	9540088	495	9540153	470,482	9540422	474
9492836	355	9492905	363	9540020	473	9540089	495	9540154	470	9540428	468
9492837	355	9492906	364	9540021	473	9540090	495	9540155	477	9540429	468
9492838	353	9492907	364	9540022	473	9540091	495	9540156	477	9550010	220
9492839	353	9492908	365	9540024	473	9540092	495	9540157	477	9550011	221
9492841	354	9492909	365	9540025	473	9540093	495	9540158	477	9550012	222

9550013	221	9580642	75	9580763	245	9621541	506	9680161	345	9680314	508
9550014	222	9580643	75	9580764	244	9621542	506	9680162	338	9680315	521
9550020	222	9580644	75	9580765	244	9621580	520	9680163	338	9680316	521
9550030	220	9580645	75	9580766	244	9621581	520	9680164	338,339	9680317	521
9550040	220	9580646	75	9580767	244	9621582	537	9680165	339	9680318	521
9550060	222	9580650	254	9580768	250	9621583	537	9680166	338,339	9680319	521
9550070	222	9580651	254	9580769	250	9621584	537	9680167	338,339	9680320	521
9550080	220	9580652	255	9580652	249	9621585	520	9680168	338,339	9680321	521
9550080	221	9580653	255	9580771	251	9621586	537	9680169	338,339	9680322	521
9550090	222	9580654	259	9580772	251	9680100	331	9680170	338	9680323	521
9551810	175	9580655	259	9580773	251	9680101	331	9680171	338	9680324	521
9551820	175	9580656	259	9580774	251	9680102	331	9680172	338	9680325	521
9551830	175	9580657	259	9580775	249	9680103	331	9680173	338	9680326	521
9560010	220	9580658	259	9580776	248	9680104	333	9680174	338	9680327	521
9560010	221,222	9580659	261	9580777	248	9680105	333	9680175	316	9680328	521
9560011	220,221,222	9580660	261	9580778	248	9680106	332	9680176	316,338,339	9680329	521
9560012	220,221,222	9580661	260	9580779	251	9680107	332	9680177	316,338,339	9680330	521
9560020	220,221,222	9580662	261	9580780	251	9680108	331	9680178	316,338,339	9695101	167
9560030	222	9580663	254,255	9580781	249	9680109	331	9680179	326	9695102	167
9560035	220,221,222	9580664	254,255	9580782	249	9680110	332	9680190	322	9695103	167
9560040	222	9580665	254,255	9580783	249	9680111	332	9680191	322	9695104	167
9560210	221	9580666	254,255	9580810	244	9680112	333	9680192	335	9695105	167
9560220	221	9580667	254,255	9580812	269	9680113	334	9680193	335	9695106	167
9570001	65	9580668	254,255	9580813	269	9680114	326	9680194	323	9695130	71
9570002	65	9580669	254	9580814	269	9680115	326	9680195	335	9695131	71
9570003	65	9580670	255	9580815	269	9680116	326	9680196	335	9695132	71
9570004	65	9580716	254	9580816	269	9680117	326	9680200	331	9695133	71
9570005	79	9580717	254	9580817	269	9680118	326	9680201	331	9695134	71
9570006	79	9580718	254	9580818	269	9680119	326	9680202	331	9695135	71
9570007	79	9580719	254	9580819	271	9680120	326	9680203	331	9695136	71
9570008	79	9580720	254	9580820	271	9680121	321	9680204	332	9695137	71
9570009	79	9580721	254	9580821	271	9680122	321	9680205	332	9695138	71
9570010	79	9580722	255	9580822	271	9680123	321	9680206	332	9695139	71
9570011	79	9580723	255	9580823	264	9680124	321	9680207	335	9695140	71
9570012	79	9580724	259	9580824	264	9680125	322	9680208	333	9695141	71
9570016	78,79	9580725	259	9580825	264	9680126	322	9680209	326	9695142	71
9570017	78,79	9580726	258	9580826	264	9680127	321	9680210	326	9695143	71
9570018	65	9580727	258	9580827	264	9680128	321	9680211	333	9695144	71
9570019	65	9580728	259	9580828	264	9680129	322	9680212	335	9695145	71
9570020	65	9580729	259	9580829	264	9680130	323	9680213	322	9695150	171
9570021	65	9580730	259	9580830	264	9680131	323	9680214	322	9695151	171
9580010	183	9580731	259	9580831	264	9680132	323	9680215	322	9695152	171
9580020	183	9580732	259	9580832	264	9680133	323	9680216	322	9695153	171
9580030	183	9580733	259	9580833	264	9680134	316	9680217	335	9695156	167
9580040	183	9580734	261	9600217	413	9680135	316	9680218	321	9695157	167
9580050	183	9580735	261	9602615	417	9680136	316	9680219	316	9695158	167
9580060	183	9580736	260	9621501	518	9680137	316	9680220	316	9695159	167
9580621	75	9580737	261	9621503	518	9680138	316	9680221	316	9695160	167
9580622	75	9580738	254,255	9621505	519	9680139	316	9680222	316	9695161	167
9580623	75	9580739	254,255	9621507	519	9680140	316	9680222	326	9695166	172
9580624	75	9580740	254,255	9621519	529	9680141	316	9680224	323	9695167	172
9580626	75	9580741	254,255	9621520	528	9680142	316	9680226	320	9695168	172
9580627	80	9580742	254,255	9621521	527	9680147	338	9680227	323	9695169	172
9580628	80	9580743	254,255	9621522	527	9680148	338	9680300	494	9695174	107
9580629	387	9580750	244	9621523	527	9680149	339	9680301	494	9695175	107
9580630	387	9580751	244	9621526	501	9680150	339	9680302	494	9695176	107
9580631	387	9580752	245	9621527	501	9680151	338	9680303	490	9695177	107
9580632	387	9580753	245	9621528	508	9680151	339	9680304	494	9695178	107
9580633	387	9580754	244,245	9621529	508	9680152	345	9680305	515	9695179	107
9580634	387	9580755	244,245	9621530	508	9680153	345	9680306	507	9695180	107
9580635	168	9580756	244,245	9621533	509	9680154	345	9680307	507	9695181	107
9580636	175	9580757	244,245	9621534	509	9680155	343	9680308	507	9695182	107
9580637	175	9580758	244,245	9621535	509	9680156	343	9680309	507	9695183	107
9580638	175	9580759	244,245	9621536	510	9680157	343	9680310	507	9695184	107
9580639	75	9580760	244,245	9621537	511	9680158	343	9680311	507	9695185	107
9580640	75	9580761	245	9621538	511	9680159	343	9680312	496	9695186	107
9580641	75	9580762	245	9621540	506	9680160	343	9680313	496	9695187	107

9695188	107	9810066	214	9844030	66	9844098	173	9879105	134	9988203	374
9695189	107	9810067	214	9844031	66	9844100	208	9879106	417	9988204	374
9695190	107	9810068	214	9844032	147	9844101	209	9879107	133	9988205	374
9695191	107	9810069	214	9844033	147	9844102	209	9879108	133	9988206	374
9695326	71	9810070	214	9844034	147	9844103	206	9879109	132	9988207	374
9695327	71	9810071	213	9844035	147	9844104	206	9879110	132	9988208	374
9695334	71	9810072	213	9844036	147	9844105	208	9879111	132	9999100	233
9695335	71	9810073	217	9844037	409	9844106	206	9879112	133	9999101	233
9701001	114	9810074	217	9844038	409	9844107	209	9879113	132	9999110	233
9701002	114	9810075	217	9844039	410	9844108	206,208,209	9879114	133	9999120	233
9712001	393	9810076	217	9844040	410	9844109	206,208	9879388	414	9999130	233
9707701	114	9810077	213	9844041	410	9844110	208	9879389	414	41849401	137
9712002	393	9810078	213	9844042	410	9844111	206	9879390	415	41849601	137
9712101	114	9810079	216	9844043	410	9844112	206	9879391	415	61853201	135
9712102	534	9810080	215	9844044	410	9844112	208	9879999	413	61853202	201
9720101	176	9810081	215	9844045	411	9844113	208	9889134	413,530	61853601	201
9720102	176	9810082	213	9844046	411	9844114	206	9910010	234	61886001	417
9810020	208	9810083	213	9844047	411	9844115	206,208	9911527	194	66018101	414
9810021	208	9810084	213	9844048	411	9844116	208	9911528	194	8254410 B	370
9810022	206	9810085	213	9844049	409	9844117	206	9912600	288	8254410 W	370
9810023	206	9810086	213	9844049	410	9844118	206	9912601	288	9010154BS	78
9810024	206	9810087	213	9844049	411	9844118	208	9912602	288	9010154G	78
9810024	208	9810088	213	9844050	105	9844119	209	9912603	288	9010154SS	78
9810025	206	9810089	213	9844051	105	9844120	209	9912605	290	9010155SS	78
9810025	208	9810090	212	9844052	105	9844121	209	9912610	290	9010155W	78
9810026	206	9810091	174	9844053	105	9844122	215	9912611	288	9010156B	78
9810026	208	9811361	232,233	9844054	105	9844123	215	9912612	288	9010156BS	78
9810027	208		234,235	9844055	105	9844124	214	9912620	288,290	9010156G	78
9810028	206	9811362	234,235	9844056	105	9844125	214	9913071	385	9010156SS	78
9810029	206	9840100	518	9844060	37	9844126	214	9913072	385	9010156W	78
9810029	208	9840101	518	9844061	37	9844127	214	9913073	385	9570013B	79
9810030	208	9840102	518	9844062	37	9844128	214	9913074	385	9570013BS	79
9810031	206	9840103	518	9844063	37	9844129	214	9919107	201	9570013G	79
9810032	206	9840104	518	9844064	150	9844130	214	9919108	201	9570013SS	79
9810032	208	9840105	519	9844065	150	9844131	213	9919109	201	9570013W	79
9810033	208	9840106	519	9844066	150	9844132	217	9919110	201	9570014B	79
9810034	206	9840107	519	9844067	150	9844133	217	9919111	201	9570014BS	79
9810035	206	9840108	519	9844068	150	9844134	217	9919112	201	9570014SS	79
9810035	208	9840109	519	9844069	150	9844135	217	9920015	234	9570014W	79
9810036	215	9840110	518	9844070	150	9844139	208	9920015	235	9570015B	79
9810037	215	9840111	518	9844071	150	9844140	208	9970100	377	9570015BS	79
9810038	214	9840112	518	9844072	169	9844141	208	9970101	377	9570015SS	79
9810039	214	9840113	519	9844073	169	9844142	208	9970102	376	9570015W	79
9810040	214	9840114	519	9844074	169	9844143	206	9970103	376		
9810041	214	9840115	519	9844075	169	9844145	526	9970104	376		
9810042	213	9844002	529	9844076	164	9844146	526	9970200	376		
9810043	217	9844008	528	9844077	164	9844147	518	9970210	376		
9810044	217	9844010	526	9844078	164	9844150	209	9970220	376		
9810045	217	9844011	73	9844079	164	9844151	66	9980100	442		
9810048	208	9844012	73	9844080	164	9844152	66	9980101	442		
9810049	208	9844013	73	9844081	164	9844153	66	9980102	442		
9810050	215	9844014	73	9844082	103	9844154	66	9980103	442		
9810051	215	9844015	73	9844083	103	9844155	66	9980104	442		
9810052	213	9844016	73	9844084	103	9844156	66	9980105	442		
9810053	213	9844017	73	9844085	103	9844200	426	9980106	442		
9810054	213	9844018	73	9844086	103	9844201	426	9980107	442		
9810055	213	9844019	528	9844087	103	9844202	427	9980108	442		
9810056	216	9844020	66	9844088	103	9844203	427	9980109	442		
9810057	215	9844021	66	9844089	103	9844204	426	9980110	442		
9810058	215	9844022	66	9844090	103	9844205	426	9980111	442		
9810059	215	9844023	66	9844091	103	9844206	427	9988100	374		
9810060	215	9844024	66	9844092	103	9844207	427	9988110	374,375		
9810061	215	9844025	66	9844093	103	9879100	413	9988120	374		
9810062	215	9844026	66	9844094	45	9879101	135	9988120	375		
9810063	215	9844027	66	9844095	173	9879102	135	9988200	374		
9810064	214	9844028	66	9844096	173	9879103	135	9988201	374		
9810065	214	9844029	66	9844097	173	9879104	134	9988202	374		

PICTOGRAMS

CLASS

- 

CLASS I
Protective earthing
- 

CLASS II
Protective Insulation
- 

CLASS III
Protective Low Voltage

IP PROTECTION

- 

IP20
- 

IP32
- 

IP40
- 

IP44
- 

IP54
- 

IP62
- 

IP65
- 

IP67
- 

IP68

MATERIAL

- 

ALUMINIUM
- 

PLASTIC/ PC
- 

GYP SUM
- 

STAINLESS STEEL 316
- 

STAINLESS STEEL 304
- 

GLASS
- 

CONCRETE

LAMP TYPE

- 

GU10
- 

AR111
- 

MR11/MR16

LIGHT SPECS

- 

IK
- 

CUT-OUT

LED SPECS

- 

CRI
- 

UGR
- 

STEP MACADAM

DIMMABLE

- 

NOT DIMMABLE
- 

DALI
- 

TRIAC & DALI

BEAM ANGLE

- 

STANDARD
- 

ZOOMABLE
- 

WALLWASH

WARRANTY

- 

YEARS
- 

LIFETIME

DRIVER

- 

INCLUDED
- 

EXCLUDED





