


2025

PONTLIGHT

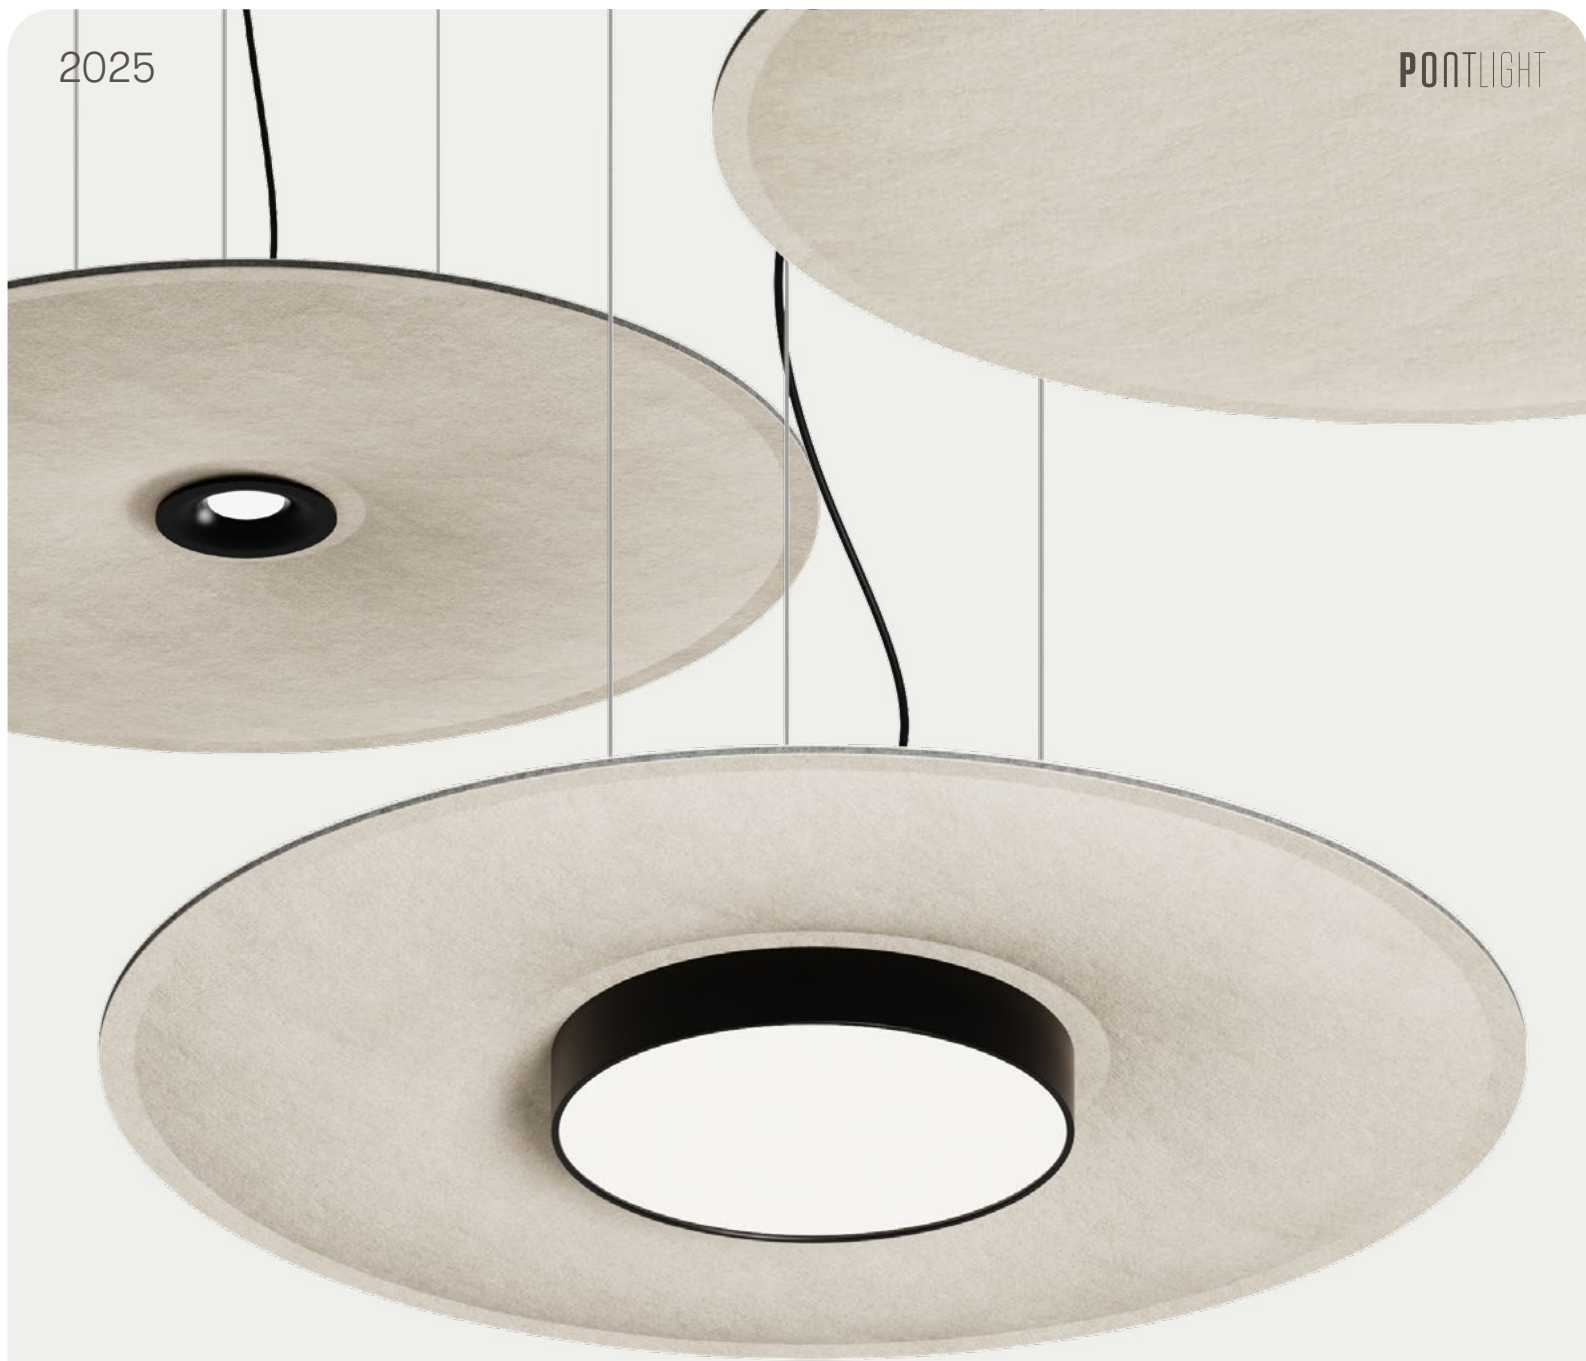

ACOUSTIC

CATALOGUE | SOLUTIONS | DESIGN | MATERIALS | COLORS

 **PONT**LIGHT
DESIGNED WITH YOU



Introduction

About the company

Pont Light specializes in aluminum profile luminaires with cutting-edge LED technology. Our diverse product portfolio offers innovative lighting solutions for designers and architects. This catalogue was created to help inspire new ideas. Pont Light provides custom-made lighting solutions for retail, hotels, offices, and residential spaces, blending functionality with aesthetic appeal.



About the Catalogue

Pont's product range has been expanded with so many acoustic luminaires that they deserve to be featured in their own dedicated catalogue. This is how this acoustic catalogue was born. We have carefully designed the new product line. In the catalogue, key parameters and benefits of acoustic materials are showcased, helping you find exactly what meets your needs.



Lighting design meets Acoustic solutions

We are trying to make lighting more and more interesting. Acoustic materials are essential as wall panels, partitions, and also as ceiling elements. Why not combine this sound-absorbing function with lighting? Join us on a journey into the world of luminaires integrated into acoustic materials!

Discover new shapes, explore vibrant colors!



TABLE
OF CONTENT

01

- 4 Introduction
- 6 About the Catalogue

02

- 10 Acoustic Materials
- 14 Pluffy Material & Colors
- 16 Feltly Material & Colors

03


- 18 Luminaires Overview
- 21 Pluffy Acoustic Luminaires
- 125 Feltly Acoustic Luminaires

ACOUSTIC



Pluffy

MATERIALS

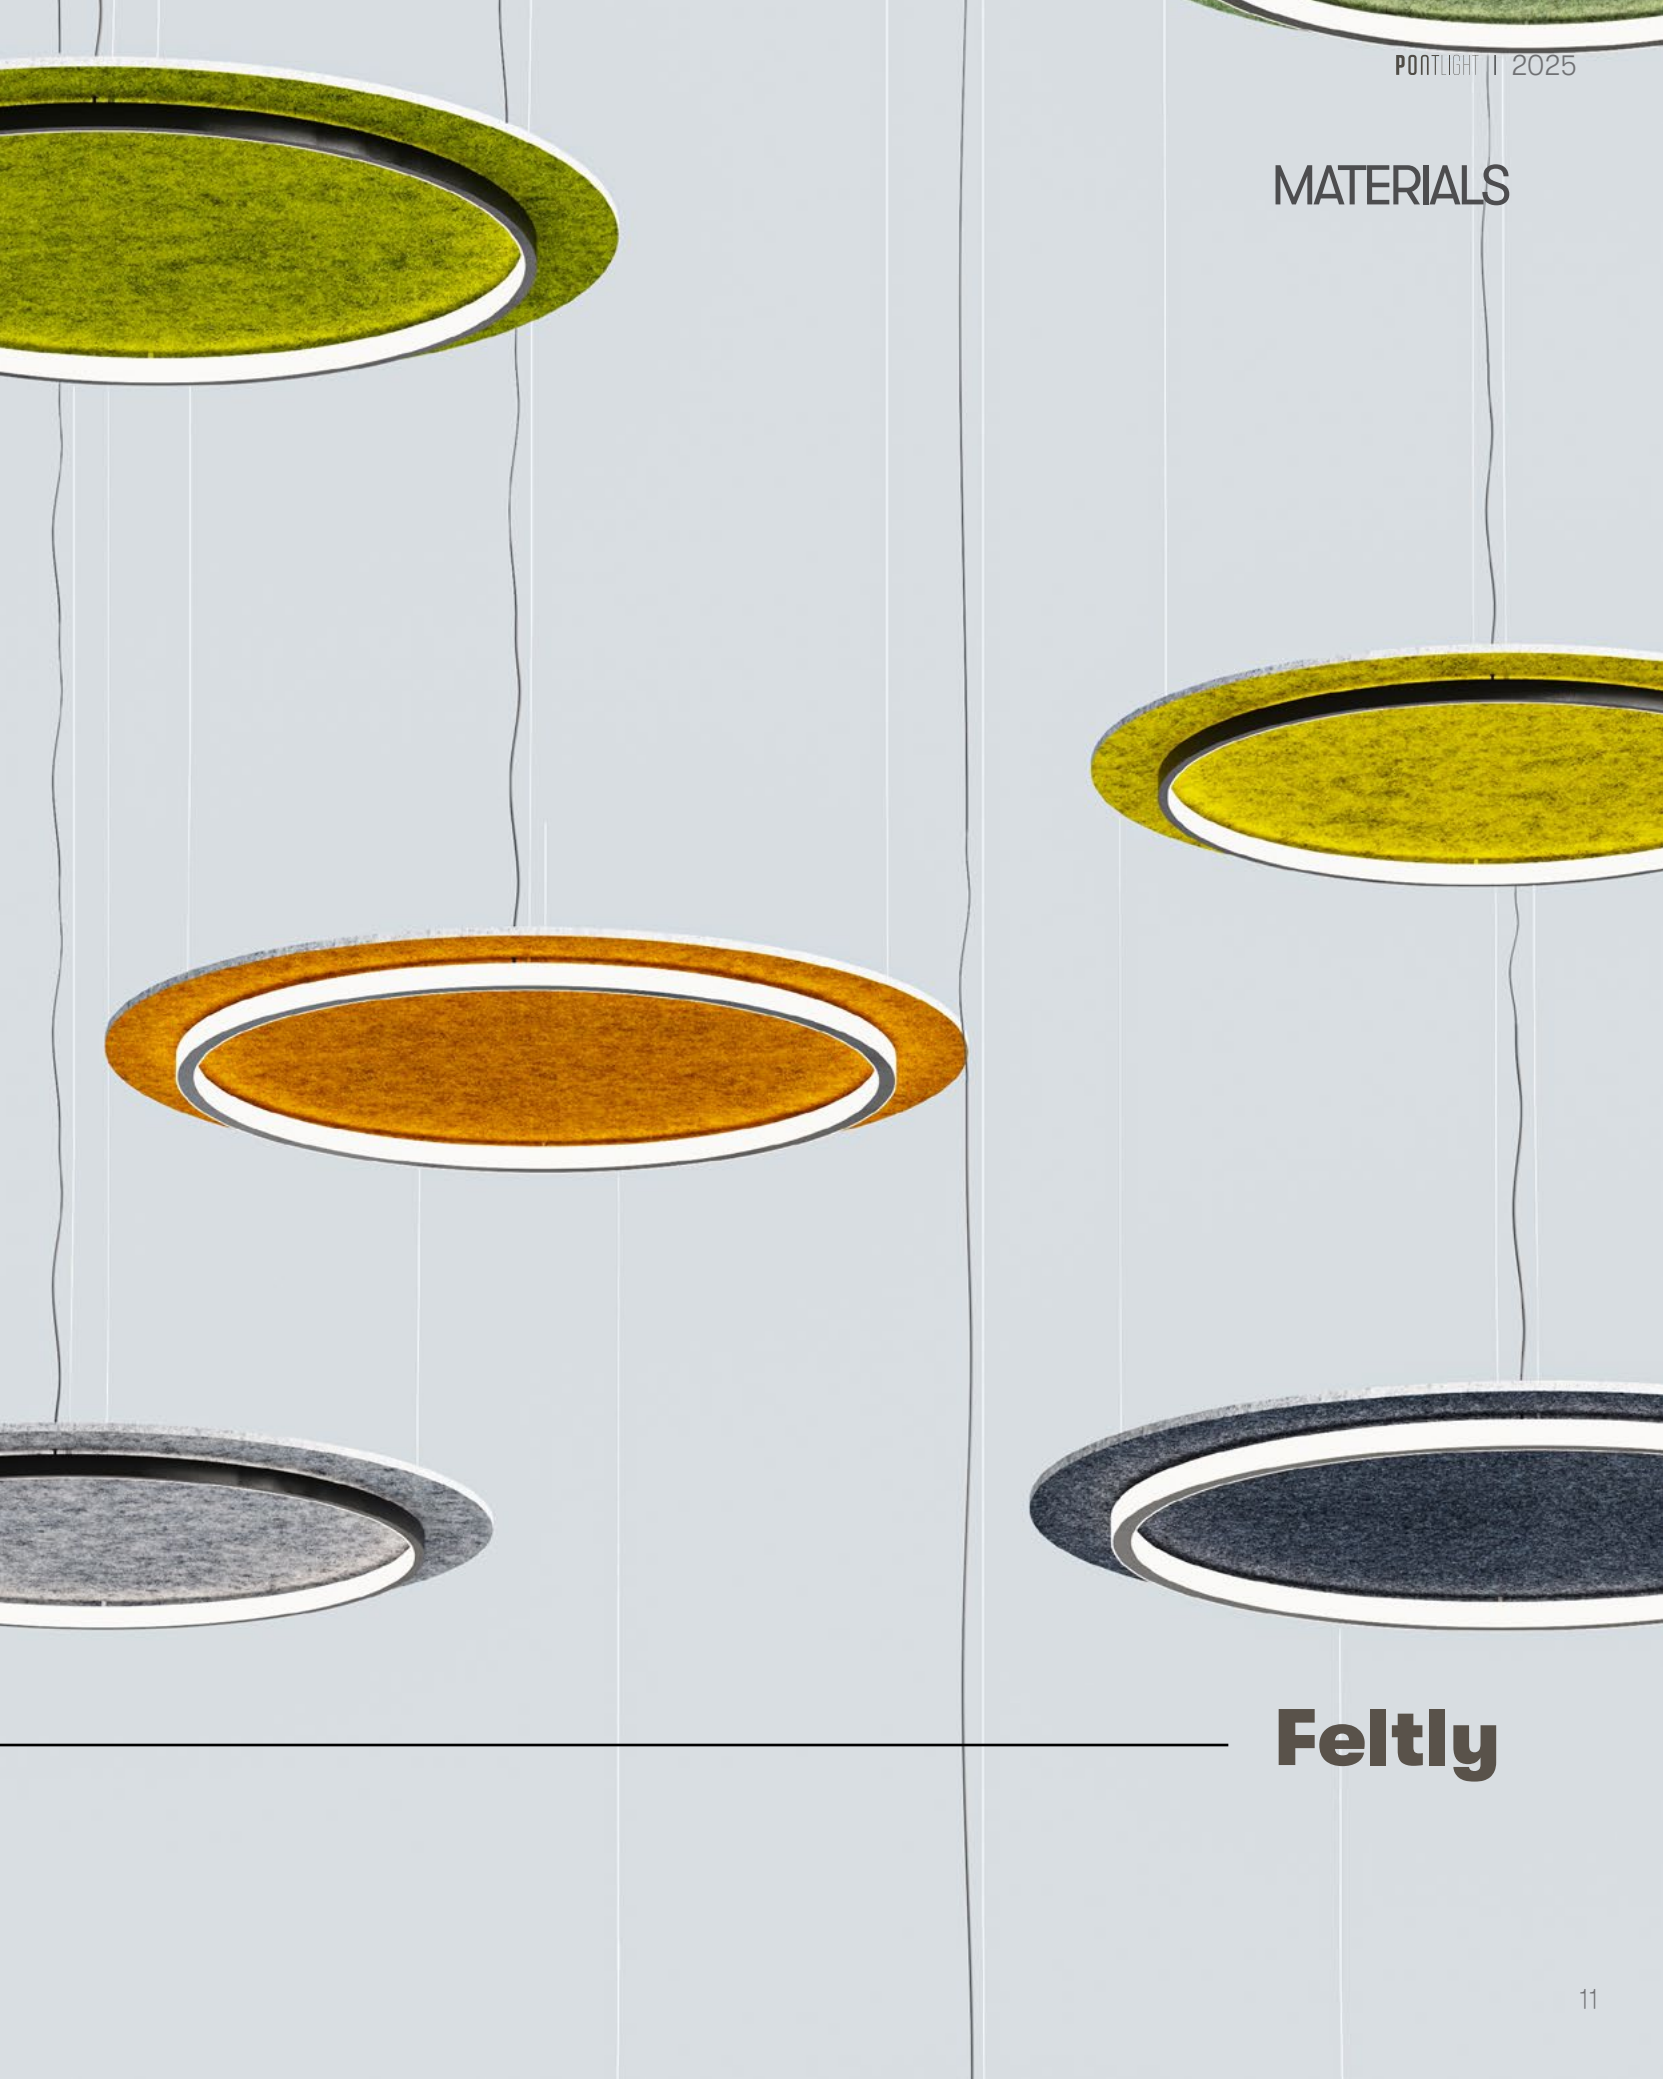

Feltly


Acoustic Materials

Acoustic materials are specialized products designed to absorb, or redirect sound waves, effectively reducing noise levels and enhancing sound quality in interiors.

Pluffy



Feltly

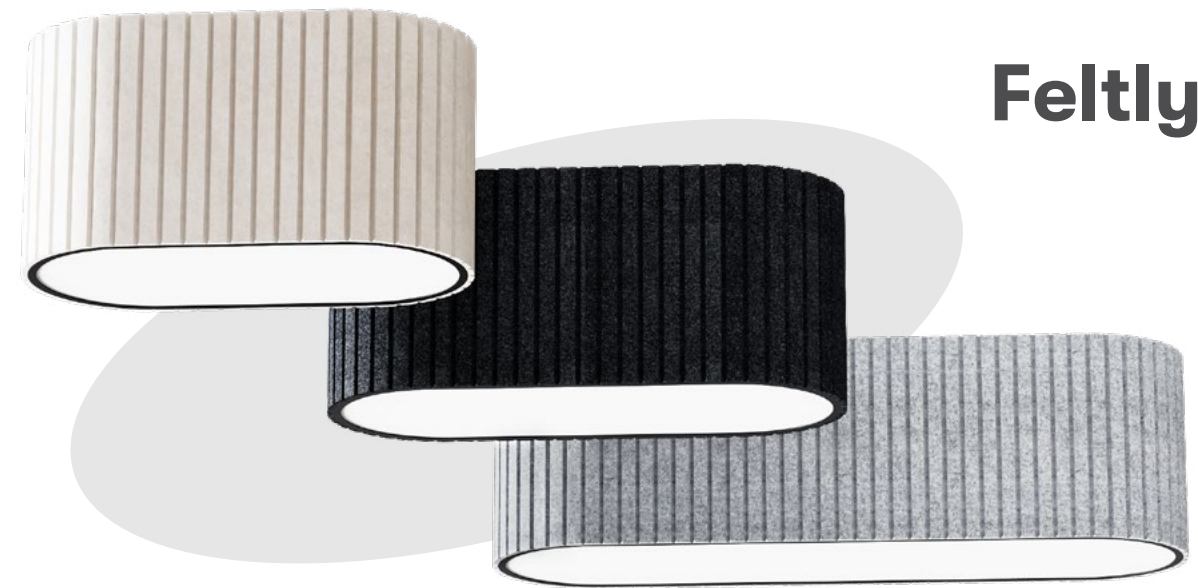

Pluffy Material

Pluffy-Felt: Puffy & Fluffy

Pluffy is a special porous material that can be formed into 3-dimensional shapes

...which makes it puffy & fluffy.

Excellent sound-absorbing and thermal insulation properties.

CERTIFICATES

High Acoustic performance (EN-11654) up to class A	Flame resistant US: ASTM 84 A Class EU: B-s1,d0 (EN 13501-1)	Does Not Hold Moisture	Easy to Clean
60% Recycled rPET content, 100% Recyclable	99.9% Antibacterial test (ISO-20743:2013)	Light fastness 4+ (ISO-105 B02)	Durable
Low VOC, Emission free, Odorless	Non-Toxic No Chemicals	Thermal insulation 0,035 W/mK	Fibre Composition ISO 1833 - 100,0 % Polyester
Bleach Cleanable Color Fastness To Pool Water; ISO 105 E03:2010 Color Change: 4-5 (Slightly Change - NoChange)	Moisture Resistance & UV Exposure Suspended Ceilings - Requirements And Test Methods. EN 13964 : 2014 - "B" Class PASSED	Plastics Artificial radiation or weathering in devices - Part 3: UV fluorescent lamps. EN 4892-3: 2016 - PASSED	Air Permeability ISO 9237: 1995 - 584.8 l/m2/sec

Pluffy Colors

Base Colors

Black BLC2094	Dark Grey DGR2093	Grey GRY2092	Pearl White PRW1091	Beige BEG1012
------------------	----------------------	-----------------	------------------------	------------------

Natural Colors

Light Oak LOA2101	Dark Oak DOA2102	Sand SND1013	Coco Brown CCB2082	Moss Green MSG2062
----------------------	---------------------	-----------------	-----------------------	-----------------------

Vivid Colors

Garnet Red GR2033	Sunset Orange SRG1021	Pink Lemonade PKL2031	Granite Blue GRB2052
Deep Blue DPB2055	Forest Green FRG2064	Burgundy BGY2034	Aqua Turquoise AQT2066

Feltly Material

Feltly offers enhanced sound absorption. Their modern design, featuring V-Cut technology gives you the freedom to make acoustic luminaires as unique as can be.



CERTIFICATES

High Acoustic performance (EN-11654) up to class A



Eco-Friendly



Easy to clean with a damp cloth or vacuum cleaner



Long lasting moulded and resistant to impact, moisture and humidity



Fire Reterdant and self-extinguishing (EN-13501) B,S1,d0



%99,9 Antibacterial structure (ISO-20743)



Light fastness grade 6+ (ISO-105 B02)



Designed for easy assembly and installation



Low VOC, formaldehyde-free (ISO-14184)



Non-Toxic No Chemicals



Superior thermal insulating 0,040 W/mK



Compared to alternative materials; extremely lightweight, apx.1,5kg / M2



Feltly Colors

Natural Colors

Thickness: 6 mm or 12 mm



Graphite Black
PLN03



Space Grey
PLN01



Middle Grey
PLN04



Light Grey
PLN02



Moon Beige
PLN06

Color Selection

Thickness: 7 mm or 13 mm



Amaranth
PLC22



Terra Cotta
PLC23



Pumpkin
PLC25



Bell
PLC17




Lemon
PLC18



Queen Blue
PLC05



Sea
PLC10



Steel Blue
PLC12



Oxley
PLC13



Leaf
PLC16

Acoustic Luminaires

Pluffy Family powered by



Rotund Ring
23



Rotund Ring Dark
29



Rotund Eye
35



Rotund Disk
41



Rotund Wall
47



Oblong
53



Cloud Single
59



Cloud Double
61



Cloud Single Dark
65



Cloud Double Dark
67



Noem
71



Noem Linear
77



Tondo Free Stand
83




Tondo Pendant
69



Tondo Desk
95



Roda
101



Furry
107



Ilona Acoustic
113



Ilona Dark Acoustic
119

Feltly Family



Yula
127



Parasol
133



Lara
139



Olive
145



Livia
151



Riva
157




Riva Slim
163



Aneta Acoustic
169

PLUFFY ACOUSTIC

Luminaires with Pluffy Material

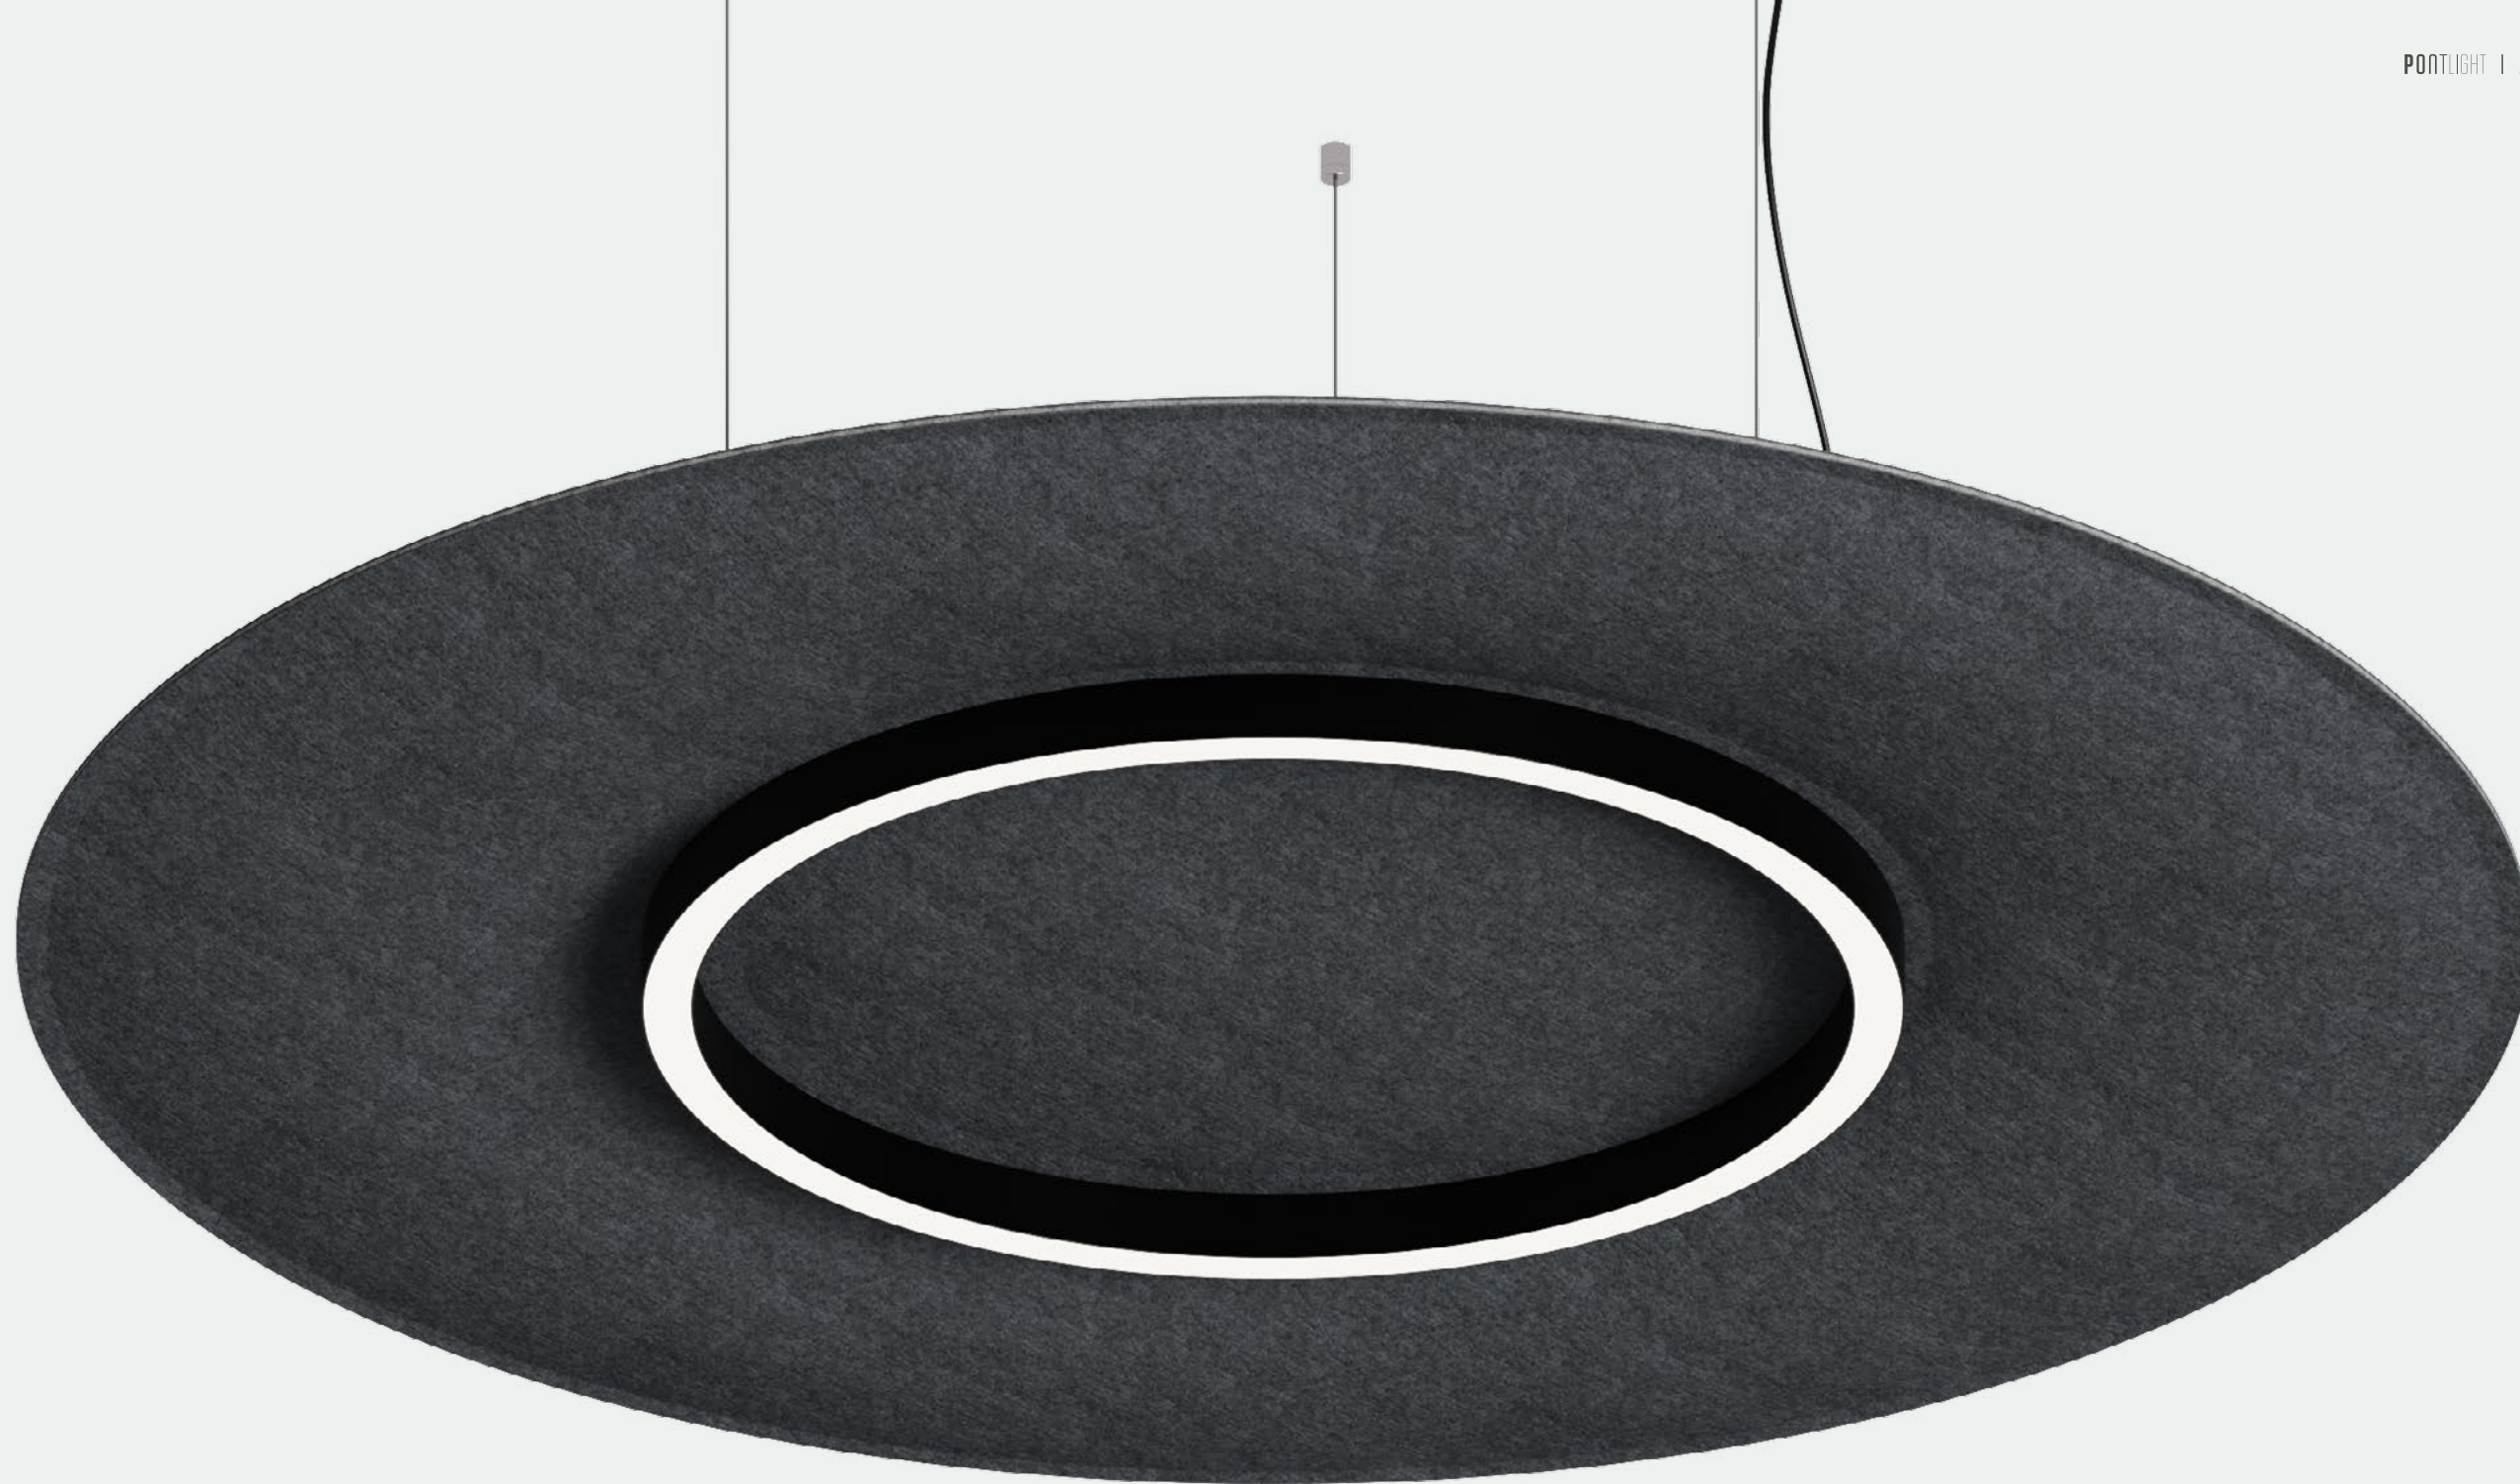

ROTUND RING



ROTUND RING

GENERAL INFORMATION

Body Parameters


MATERIALS
Aluminum luminaire body / Opal diffuser
/ Pluffy Acoustic material.

MOUNTING
Multi-Point or Single-Point suspended
luminaire.

Light Parameters

LIGHT SOURCE
LED, Opal diffuser, Direct only.
CRI>80 or CRI>90.

CONTROL
External driver. ON/OFF, DALI, PushDim,
Bluetooth.

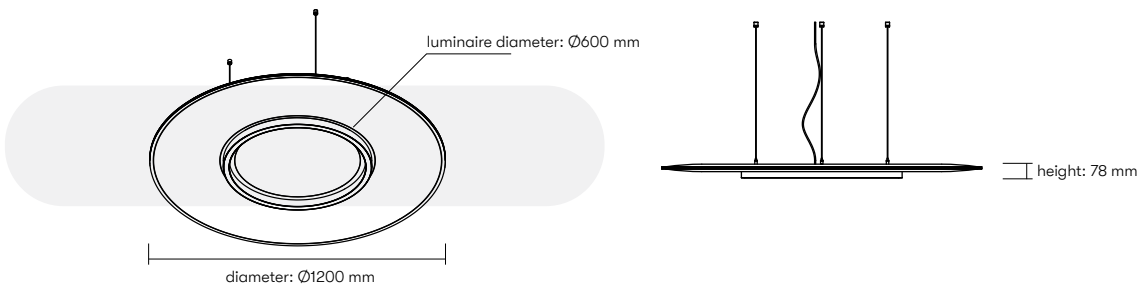


ROTUND RING

HEIGHT	DIAMETER
● 78 mm	●
	ACOUSTIC: Ø1200 mm
	LUMINAIRE: Ø600 mm
	39 W / 2370 lm

DIFFUSER		COLOR TEMPERATURE	
M microprismatic	2 2700 K	1 RGBW	
S standard (opal)	3 3000 K	5 Tunable White	
L lenses	4 4000 K		

CE 220V 240V LEDs 50/60Hz

Lumen values are calculated at 4000K.

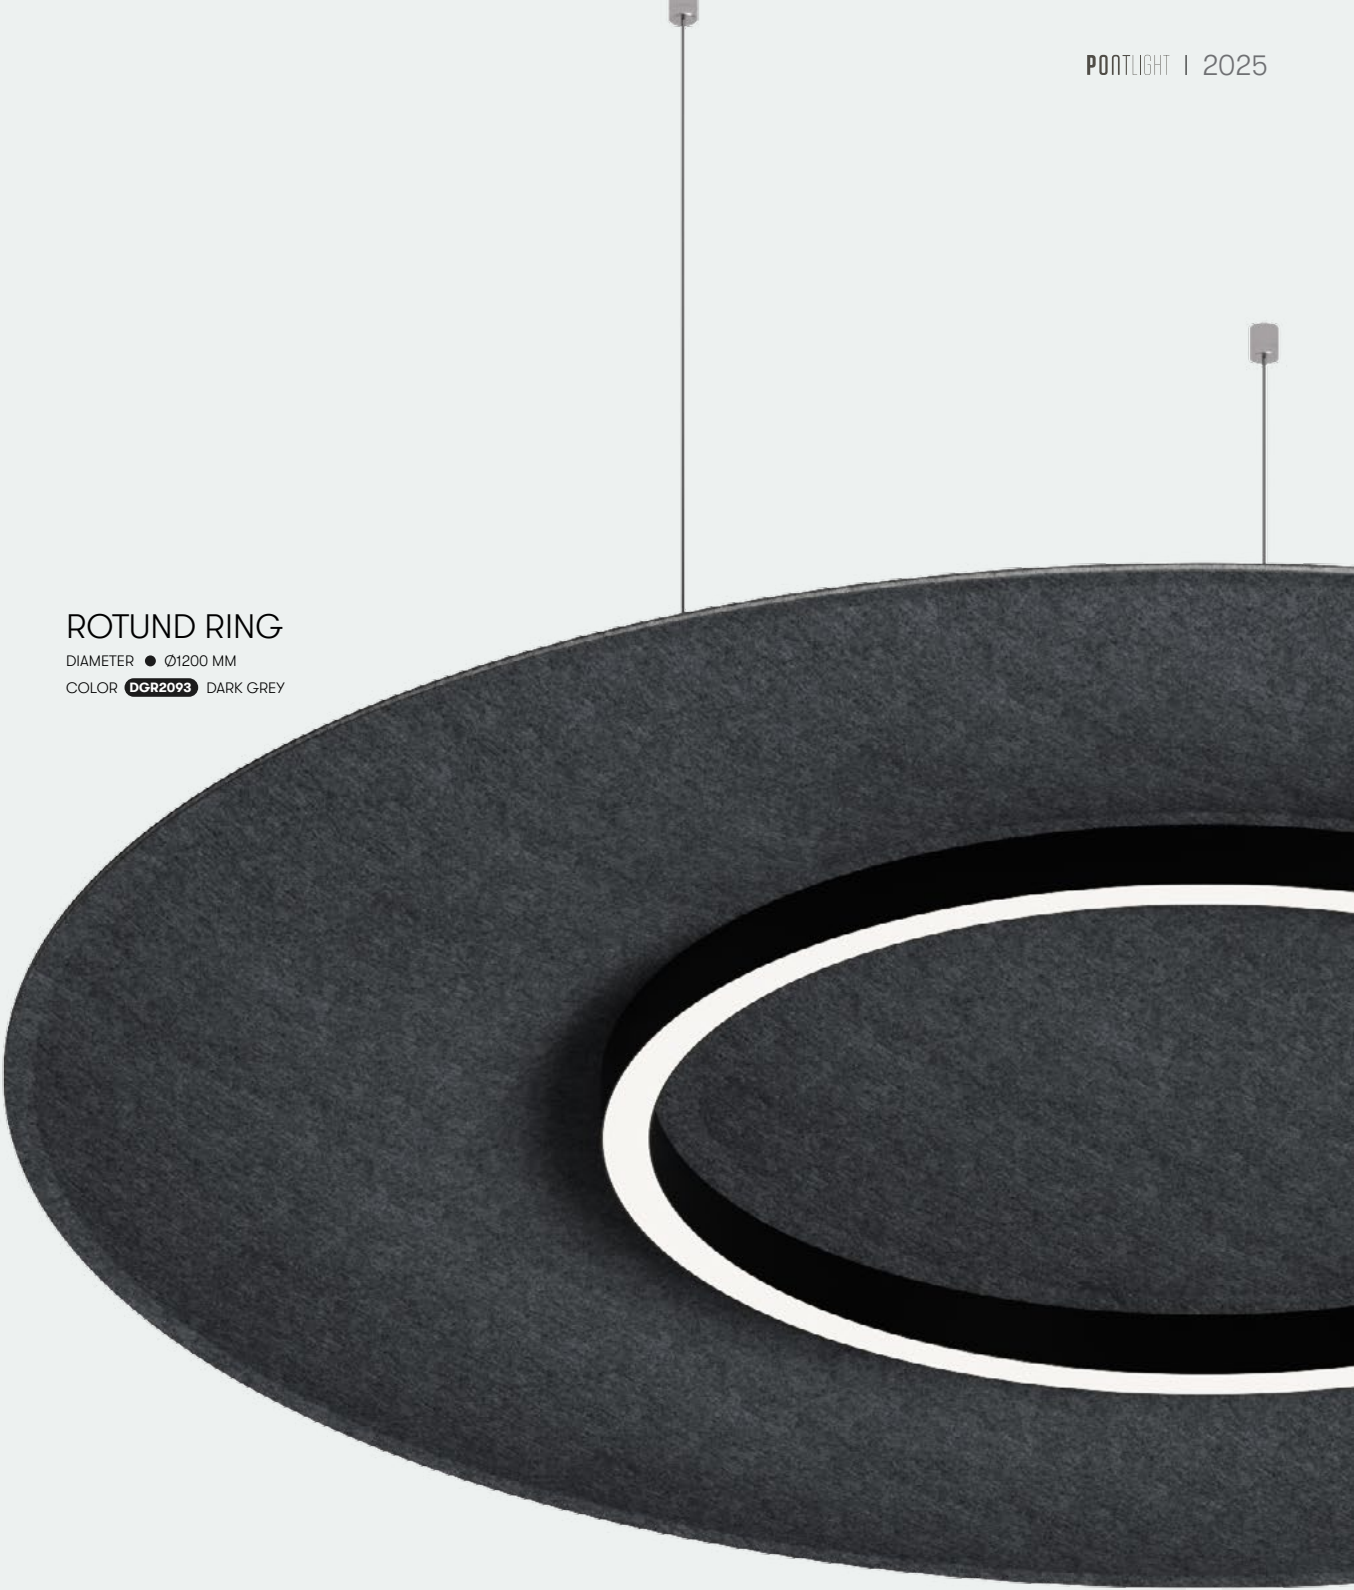

ROTUND RING

DIAMETER ● Ø1200 mm
COLOR **DGR2093** DARK GREY

ROTUND RING

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material:	PET Felt, 60% recycled from plastic bottles
Weight:	apx. 1500 g/m²
Thickness:	Max. 45mm (+/- 2mm). Min. 6mm (+/- 2mm).
Flammability:	US: ASTM 84 A Class EU: EN 13501 / Result "B-s1,d0"
Light fastness grade:	ISO 105 B02:1994 / Result "4+"
Maintenance:	Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Attenuation



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)



FRG2064



DPB2055



GRB2052



AQT2066



BEG1012



SND1013



SRG1021



GNR2033



PKL2031



BGY2034



MSG2062



GCB2082



BLC2094



DGR2093



GRY2092



LOA2101



DOA2102



PRW1091

BODY COLORS



B

Black



G

Grey



A

Anthracite



W

White



RAL

RAL



SPE

Special Colors

LIGHTING TYPES



1

Direct-only



2

Direct-Indirect



3

Indirect-only

MOUNTING TYPES

with external driver



M

Multi-Point
Pendant



P


Single-Point
Pendant

ROTUND RING

DIAMETER ● Ø1200 MM

COLOR **BEG1012** BEIGE



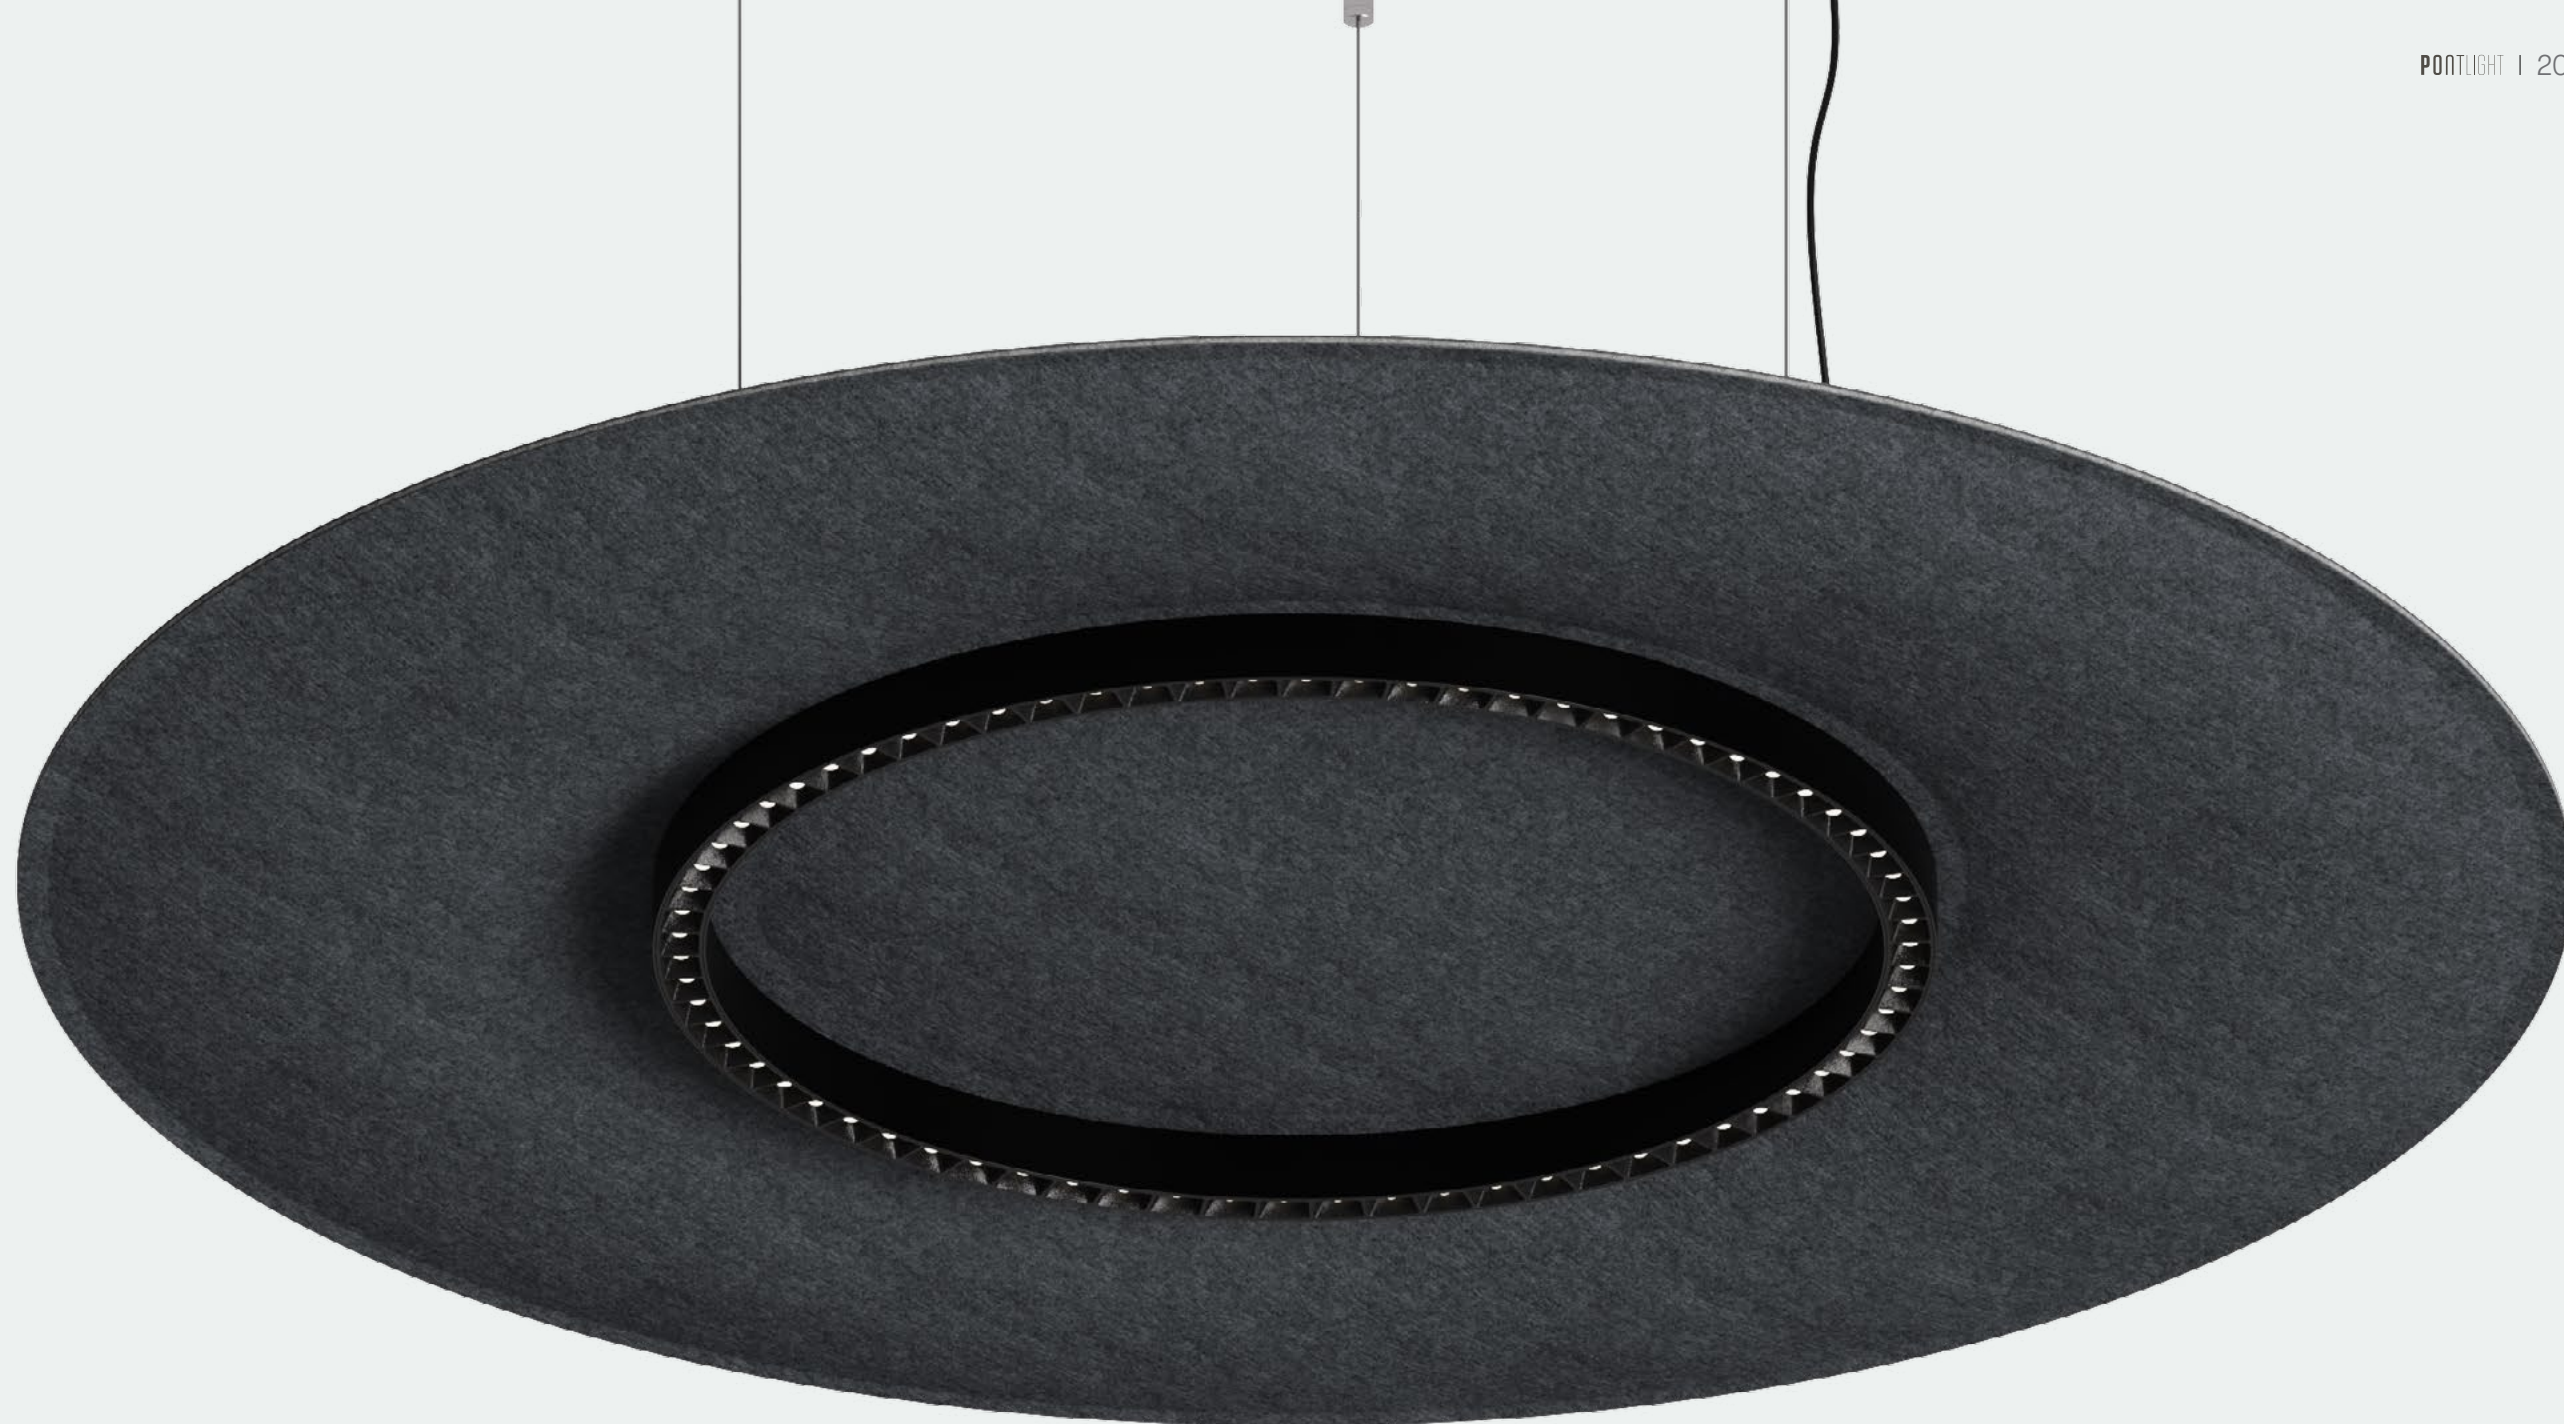

ROTUND RING DARK



ROTUND RING DARK

GENERAL INFORMATION

Body Parameters


MATERIALS
Aluminum luminaire body / Microcell diffuser
/ Pluffy Acoustic material.

MOUNTING
Multi-Point or Single-Point suspended
luminaire.

Light Parameters

LIGHT SOURCE
LED, Diffuser with lenses, Direct only.
CRI>80 or CRI>90.

CONTROL
External driver. ON/OFF, DALI, PushDim,
Bluetooth.

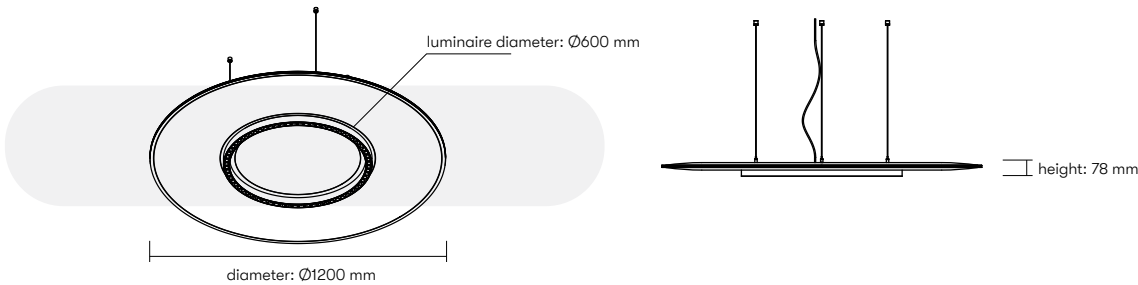

ROTUND RING DARK

HEIGHT	DIAMETER
● 78 mm	●
	ACOUSTIC: Ø1200 mm
	LUMINAIRE: Ø600 mm
	27 W / 2700 lm

DIFFUSER		COLOR TEMPERATURE	
M microprismatic	2 2700 K	1 RGBW	
S standard (opal)	3 3000 K	5 Tunable White	
L lenses	4 4000 K		

CE 220V 240V LEDs 50/60Hz

Lumen values are calculated at 4000K.



ROTUND RING DARK

DIAMETER ● Ø1200 mm
COLOR **DGR2093** DARK GREY

ROTUND RING DARK

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material: PET Felt, 60% recycled from plastic bottles

Weight: apx. 1500 g/m²

Thickness: Max. 45mm (+/- 2mm).
Min. 6mm (+/- 2mm).

Flammability: US: ASTM 84 A Class
EU: EN 13501 / Result 'B-s1,d0'

Light fastness grade: ISO 105 B02:1994 / Result '4+'

Maintenance: Indoor use only. Cleaning methods:
Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean.
Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Attenuation



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)

 FRG2064	 DPB2055	 GRB2052	 AQT2066	 BEG1012	 SND1013
 SRG1021	 GNR2033	 PKL2031	 BGY2034	 MSG2062	 CCB2082
 BLC2094	 DGR2093	 GRY2092	 LOA2101	 DOA2102	 PRW1091

BODY COLORS

 B	 G	 A	 W	 RAL	 SPE
Black	Grey	Anthracite	White	RAL	Special Colors

LIGHTING TYPES



1
Direct-only



2
Direct-Indirect



3
Indirect-only

MOUNTING TYPES

with external driver



M
Multi-Point
Pendant





P
Single-Point
Pendant

ROTUND RING DARK

DIAMETER ● Ø1200 MM

COLOR **BEG1012** BEIGE

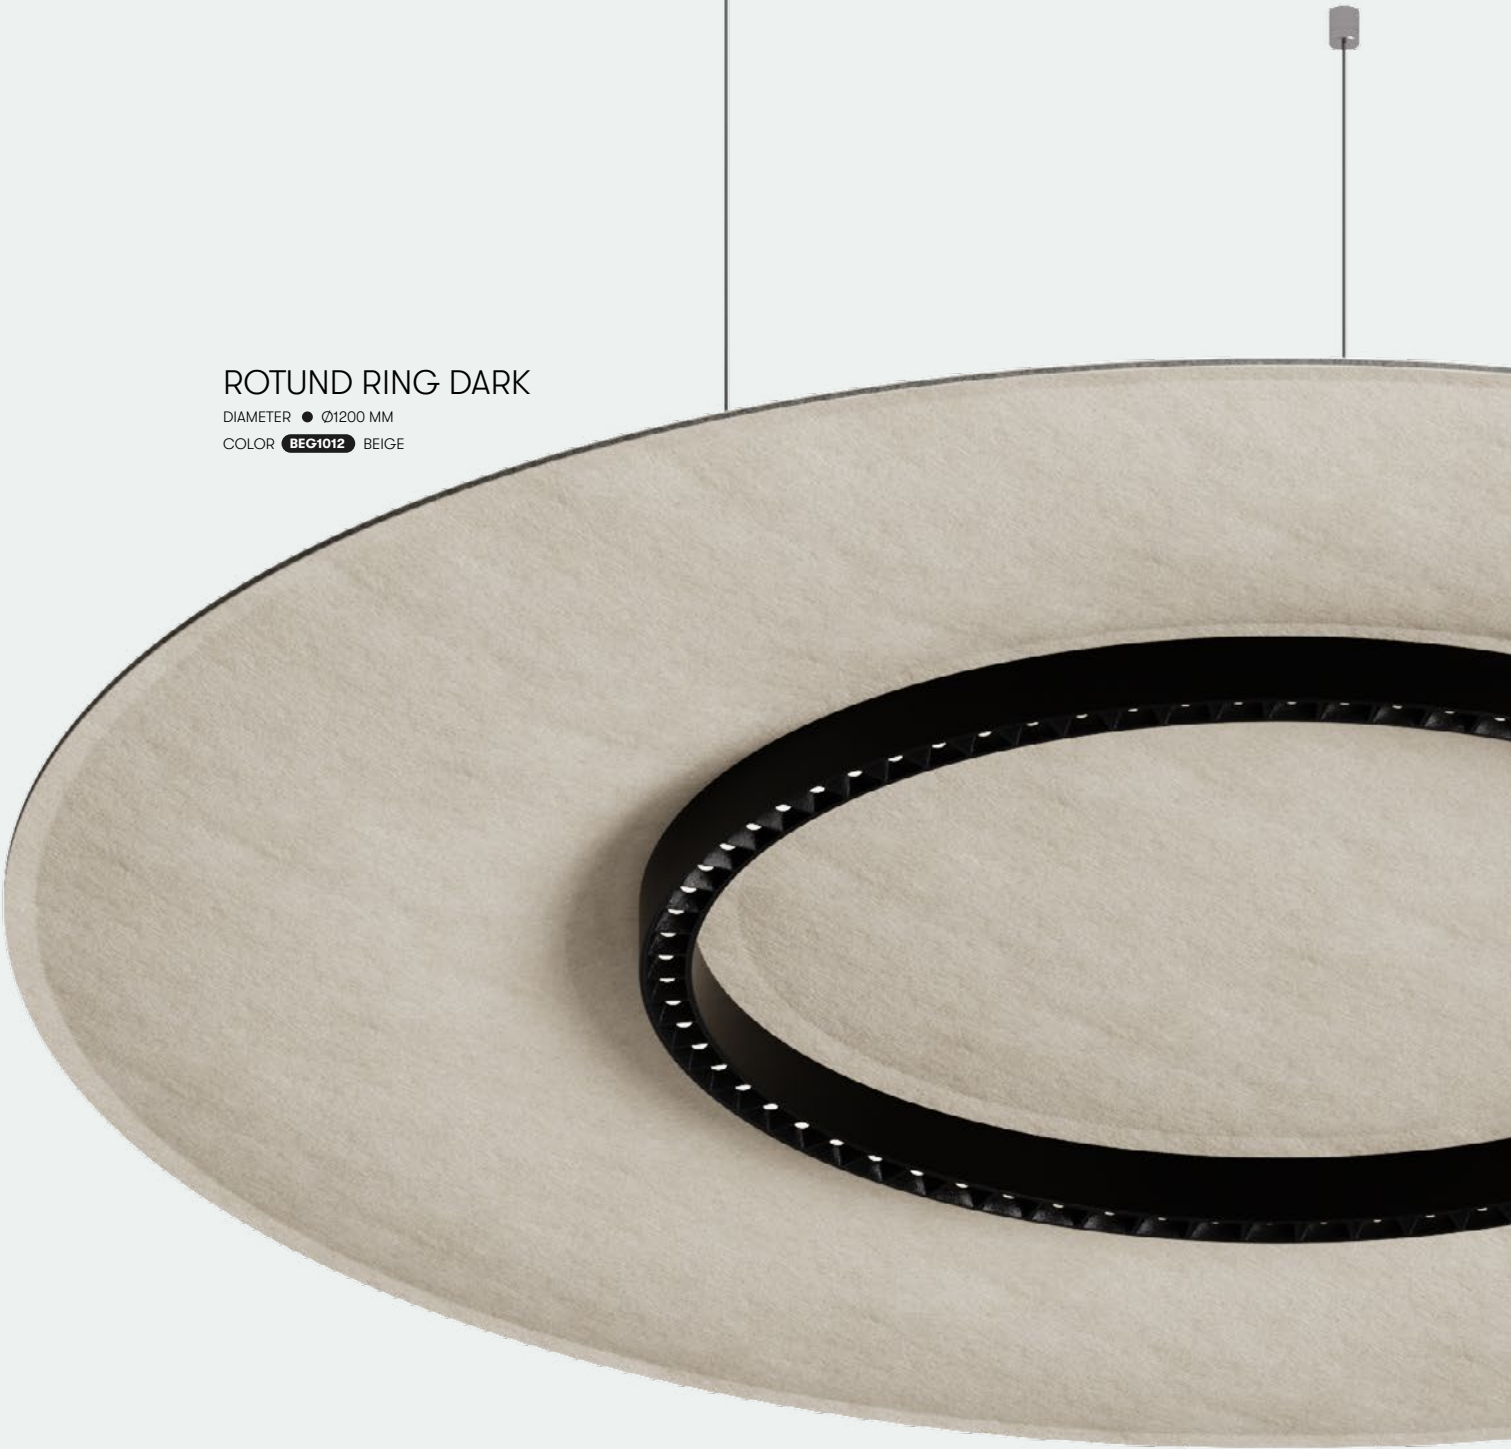

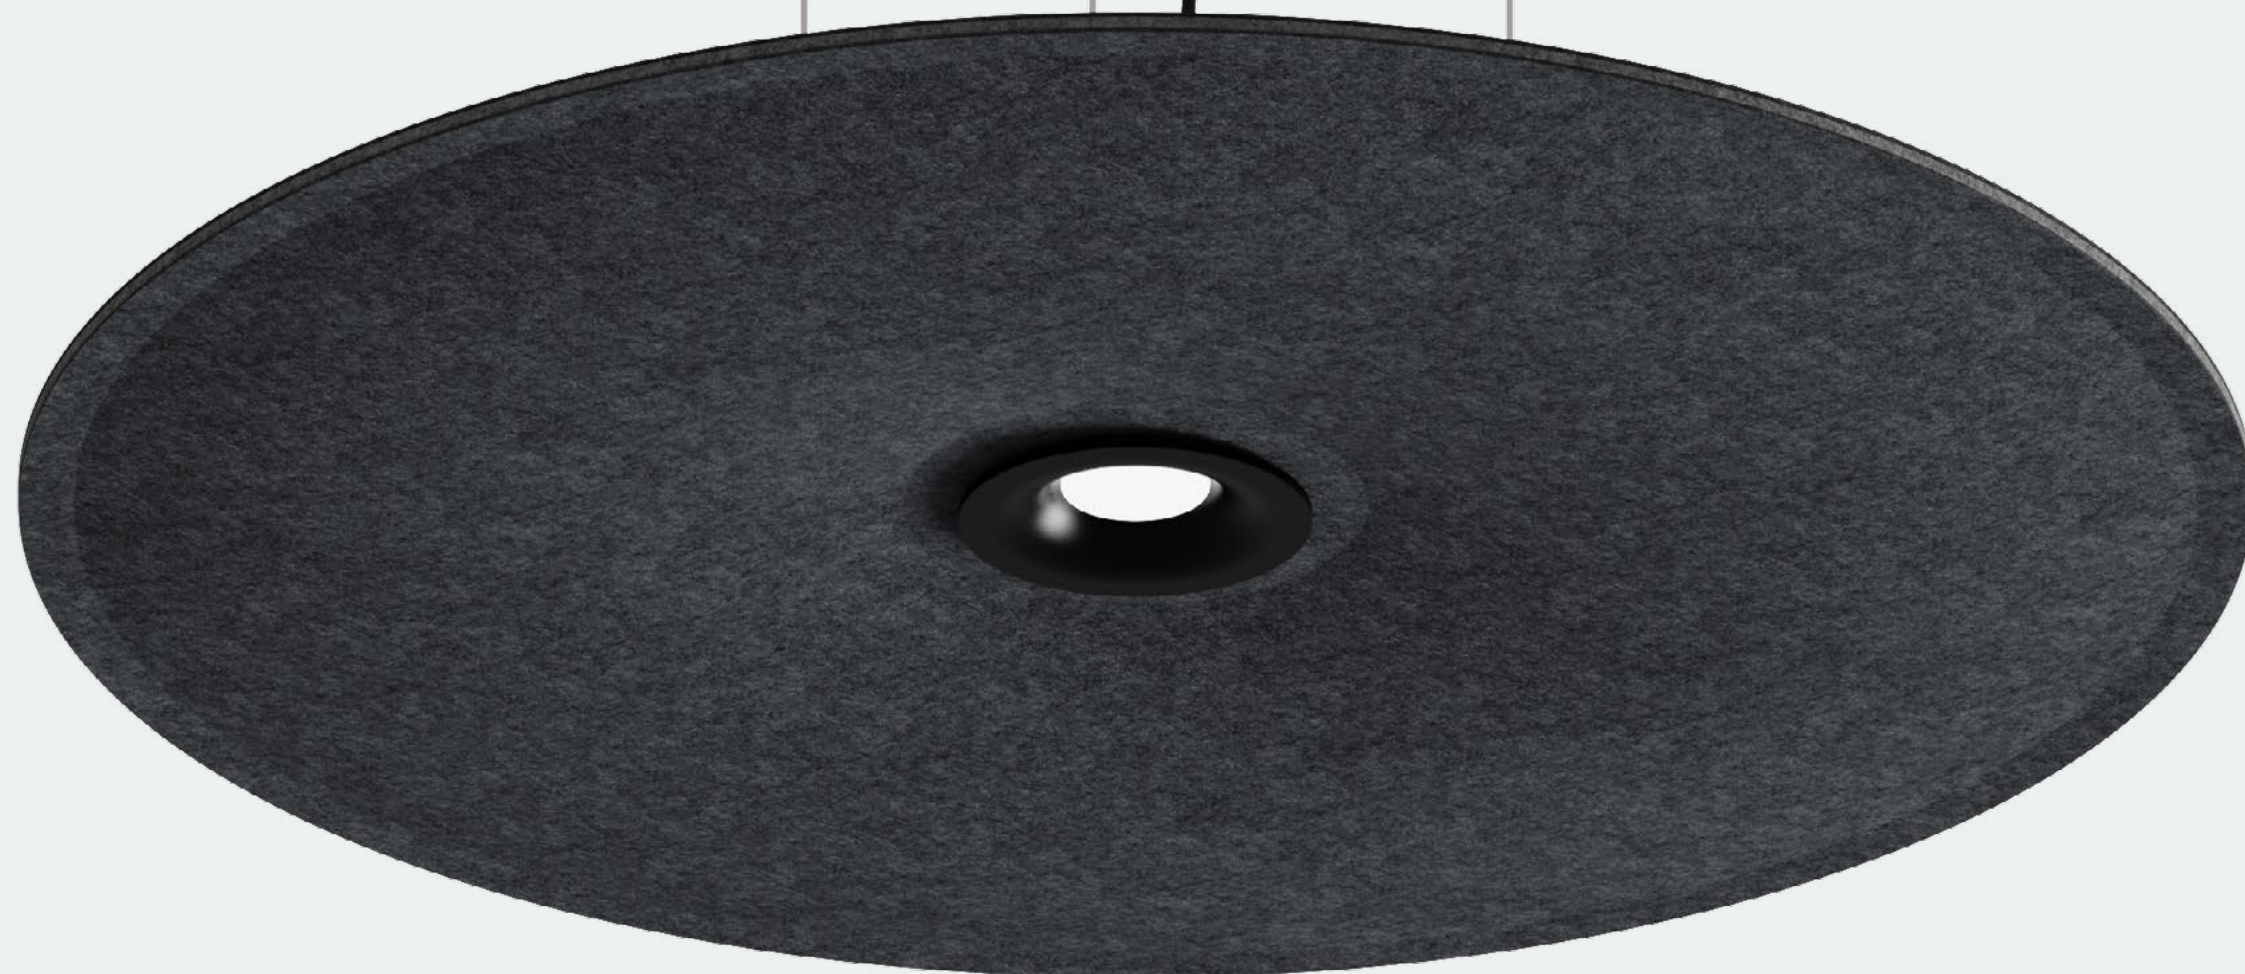

ROTUND EYE

ROTUND EYE

GENERAL INFORMATIONS

Body Parameters




MATERIALS
Aluminum luminaire body / Lenses
/ Pluffy Acoustic material.

MOUNTING
Multi-Point or Single-Point suspended
luminaire.

Light Parameters

LIGHT SOURCE
LED, Spotlight, Direct only.
CRI>80 or CRI>90.

CONTROL
External driver. ON/OFF, DALI, PushDim,
Bluetooth.

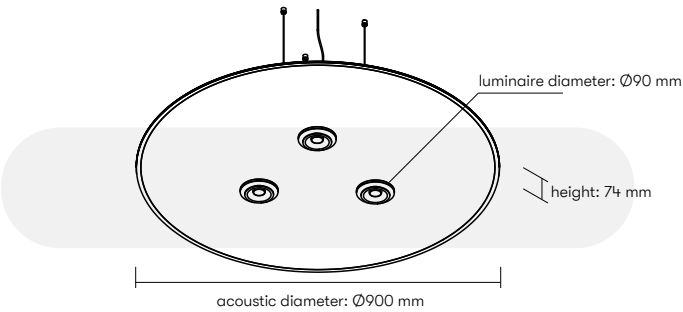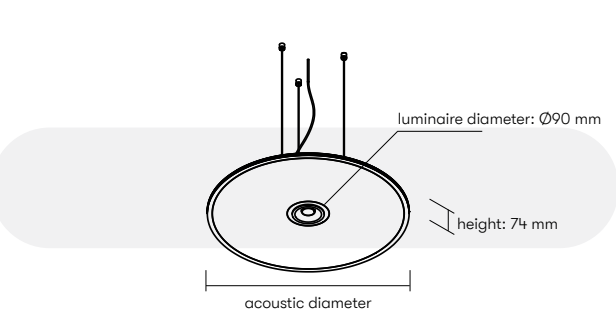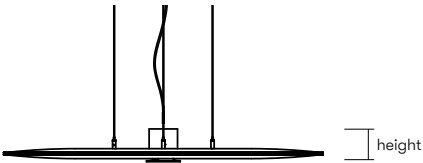

ROTUND EYE

HEIGHT	DIAMETER	
● 74 mm	●	●
	ACOUSTIC: Ø600 mm	Ø900 mm
	LUMINAIRE: Ø90 mm	Ø90 mm
	8 W / 850 lm	8 W / 850 lm

DIFFUSER	COLOR TEMPERATURE	
1 microprismatic	2 2700 K	1 RGBW
3 standard (opal)	3 3000 K	5 Tunable White
4 lenses	4 4000 K	

ROTUND EYE TRIPLE

HEIGHT	DIAMETER	
● 74 mm	●	
	ACOUSTIC: Ø900 mm	
	LUMINAIRE: Ø90 mm	
	24 W / 2550 lm	

DIFFUSER	COLOR TEMPERATURE	
1 microprismatic	2 2700 K	1 RGBW
3 standard (opal)	3 3000 K	5 Tunable White
4 lenses	4 4000 K	

ROTUND EYE

DIAMETER ● Ø600 MM
COLOR **DGR2093** DARK GREY

ROTUND EYE TRIPLE

DIAMETER ● Ø900 MM
COLOR **DGR2093** DARK GREY

ROTUND EYE

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material: PET Felt, 60% recycled from plastic bottles

Weight: apx. 1500 g/m²

Thickness by diameter: Ø600 mm: Max. 30mm, min. 6mm. (+/- 2mm)
Ø900 mm: Max. 40mm, min. 6mm. (+/- 2mm)

Flammability: US: ASTM 84 A Class
EU: EN 13501 / Result "B-s1,d0"

Light fastness grade: ISO 105 B02:1994 / Result "4+"

Maintenance: Indoor use only. Cleaning methods:
Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean.
Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Attenuation



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)

 FRG2064	 DPB2055	 GRB2052	 AQT2066	 BEG1012	 SND1013
 SRG1021	 GNR2033	 PKL2031	 BGY2034	 MSG2062	 GCB2082
 BLC2094	 DGR2093	 GRY2092	 LOA2101	 DOA2102	 PRW1091

BODY COLORS

 B	 G	 A	 W	 RAL	 SPE
Black	Grey	Anthracite	White	RAL	Special Colors

LIGHTING TYPES



1
Direct-only



2
Direct-Indirect



3
Indirect-only

MOUNTING TYPES

with external driver



M
Multi-Point
Pendant



P
Single-Point
Pendant



ROTUND EYE
DIAMETER ● Ø600 MM
COLOR **BEG1012** BEIGE

ROTUND EYE **TRIPLE**
DIAMETER ● Ø900 MM
COLOR **BEG1012** BEIGE



ROTUND DISK



ROTUND DISK

GENERAL INFORMATIONS

Body Parameters

MATERIALS

Aluminum luminaire body / Opal, microprismatic diffuser / Pluffy Acoustic material.

MOUNTING

Multi-Point or Single-Point suspended luminaire.


Light Parameters

LIGHT SOURCE


LED, Opal or microprismatic diffuser, Direct only, Direct-Indirect or Indirect only. CRI>80 or CRI>90.

CONTROL

External driver. ON/OFF, DALI, PushDim, Bluetooth.

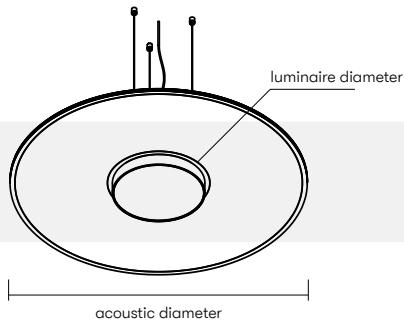

height: 80 mm



ROTUND DISK

HEIGHT

● 80 mm

DIAMETER

	●	●	●
ACOUSTIC:	Ø600 mm	Ø900 mm	Ø1200 mm
LUMINAIRE:	Ø220 mm	Ø280 mm	Ø380 mm
	18 W / 1980 lm	23 W / 2530 lm	36 W / 3960 lm

DIFFUSER

- M microprismatic
- S standard (opal)
- L lenses

COLOR TEMPERATURE

- 2 2700 K
- 3 3000 K
- 4 4000 K
- 1 RGBW
- 5 Tunable White



ROTUND DISK

DIAMETER ● Ø900 MM
COLOR **DGR2093** DARK GREY



ROTUND DISK

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material: PET Felt, 60% recycled from plastic bottles
Weight: apx. 1500 g/m²
Thickness by diameter: Ø600 mm: Max. 30mm, min. 6mm. (+/- 2mm)
Ø900 mm: Max. 40mm, min. 6mm. (+/- 2mm)
Ø1200 mm: Max. 45mm, min. 6mm. (+/- 2mm)
Flammability: US: ASTM 84 A Class
EU: EN 13501 / Result "B-s1,d0"
Light fastness grade: ISO 105 B02:1994 / Result "4+"
Maintenance: Indoor use only. Cleaning methods:
Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean.
Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Attenuation



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)

 FRG2064	 DPB2055	 GRB2052	 AQT2066	 BEG1012	 SND1013
 SRG1021	 GNR2033	 PKL2031	 BGY2034	 MSG2062	 CCB2082
 BLC2094	 DGR2093	 GRY2092	 LOA2101	 DOA2102	 PRW1091

BODY COLORS

 B	 G	 A	 W	 RAL	 SPE
Black	Grey	Anthracite	White	RAL	Special Colors

LIGHTING TYPES



1
Direct-only



2
Direct-Indirect



3
Indirect-only

MOUNTING TYPES

with external driver




M
Multi-Point
Pendant



P
Single-Point
Pendant

ROTUND DISK
DIAMETER ● Ø900 MM
COLOR **BEG1012** BEIGE

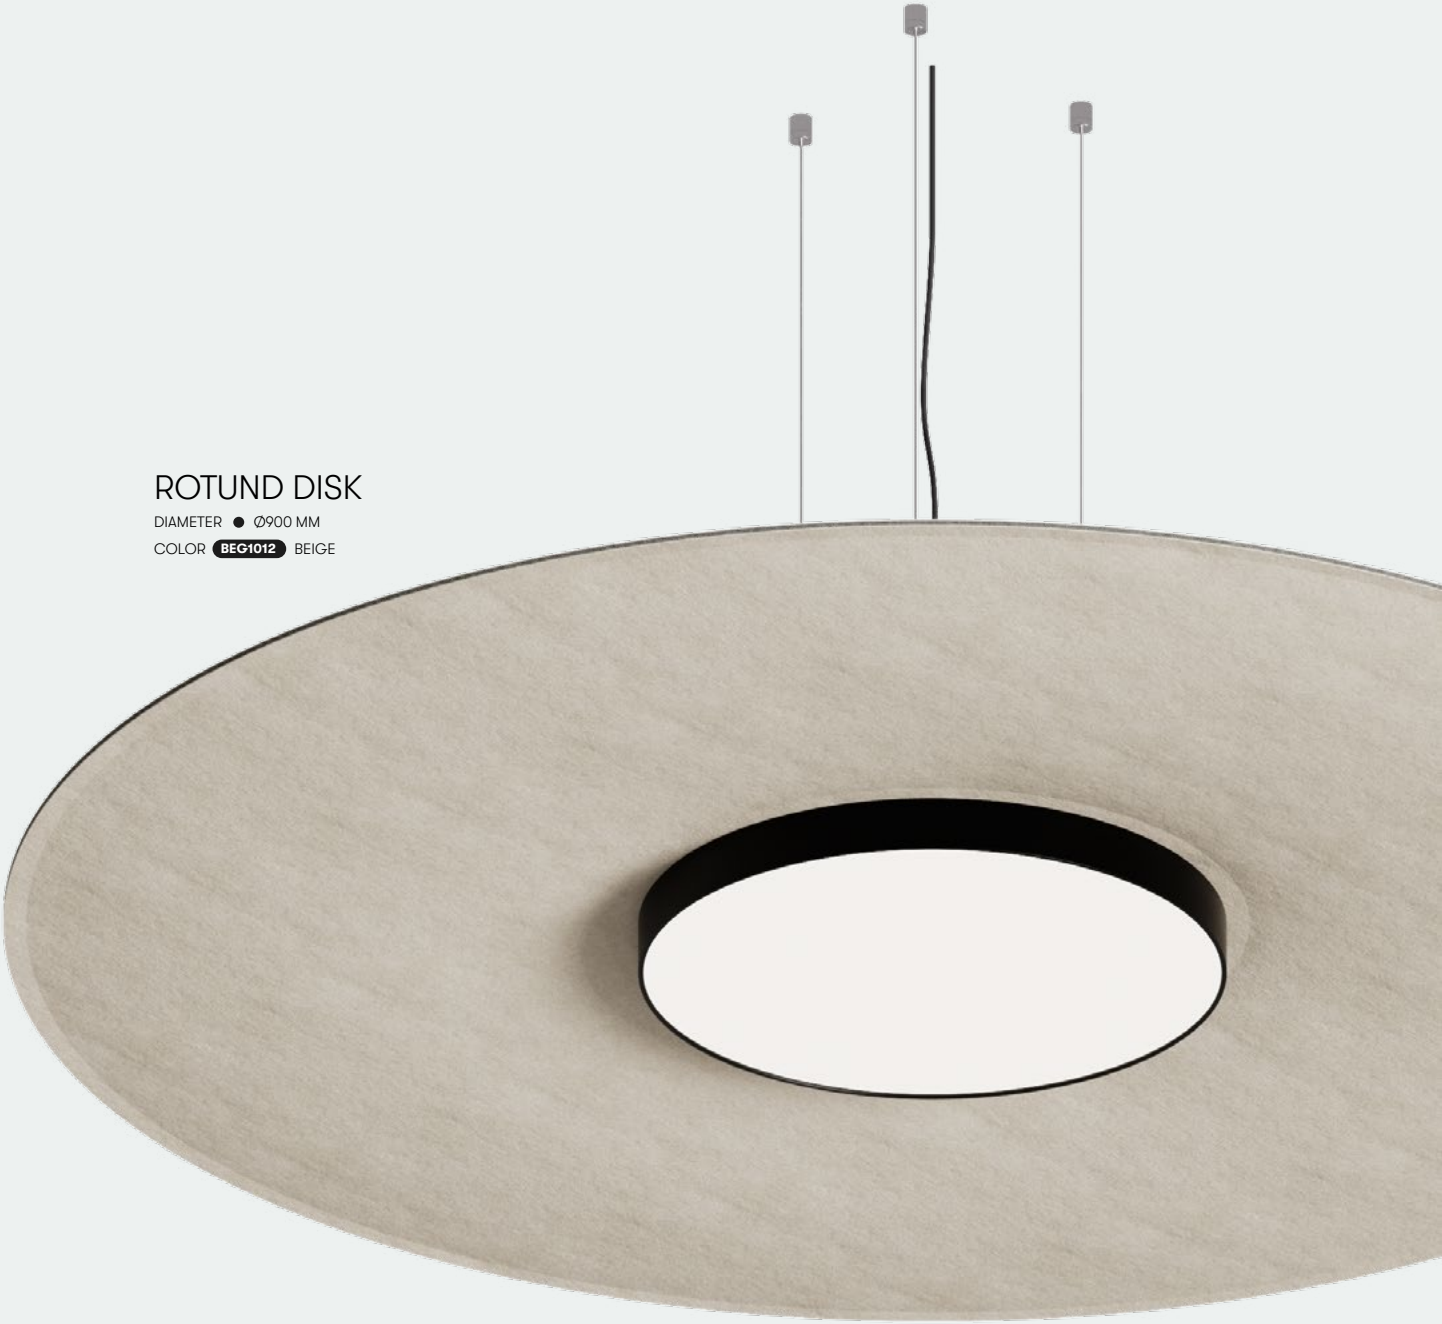



ROTUND WALL

ROTUND WALL

GENERAL INFORMATIONS

Body Parameters


MATERIALS
Aluminum luminaire body / Opal diffuser
/ Pluffy Acoustic material.

MOUNTING
Wall-mounted luminaire with spacers.

Light Parameters

LIGHT SOURCE
LED, Opal diffuser, Indirect only.
CRI>80 or CRI>90.

CONTROL
External driver. ON/OFF, DALI, PushDim,
Bluetooth.

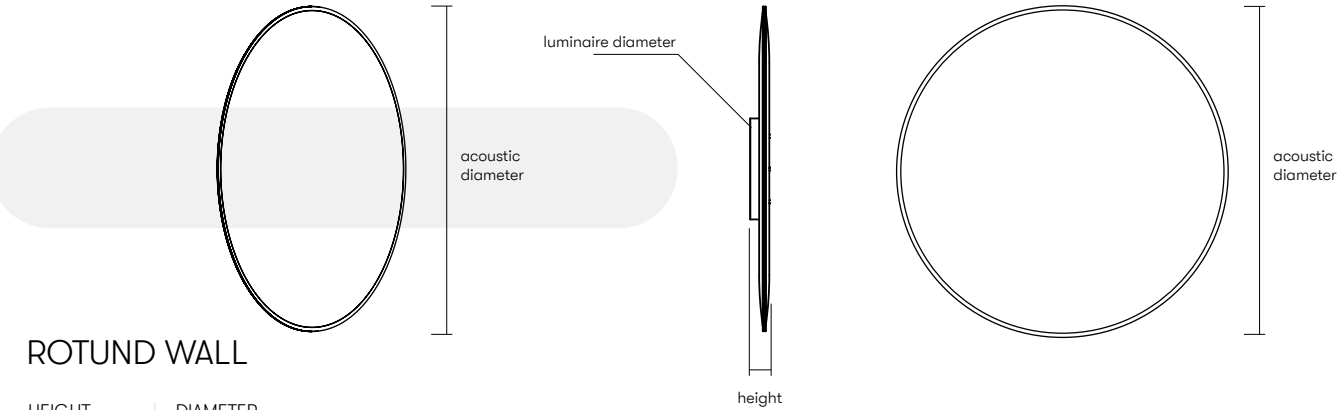

ROTUND WALL

HEIGHT	DIAMETER	
● 77 mm	●	●
	ACOUSTIC: Ø600 mm	Ø1200 mm
	LUMINAIRE: Ø400 mm	Ø1000 mm
	18 W / 1440 lm	28 W / 2240 lm


DIFFUSER	COLOR TEMPERATURE	
1 microprismatic	2 2700 K	1 RGBW
3 standard (opal)	3 3000 K	5 Tunable White
4 lenses	4 4000 K	

CE 220V 240V LEDs 50/60Hz

Lumen values are calculated at 4000K.

ROTUND WALL

DIAMETER ● Ø1200 MM
COLOR **BEG1012** BEIGE

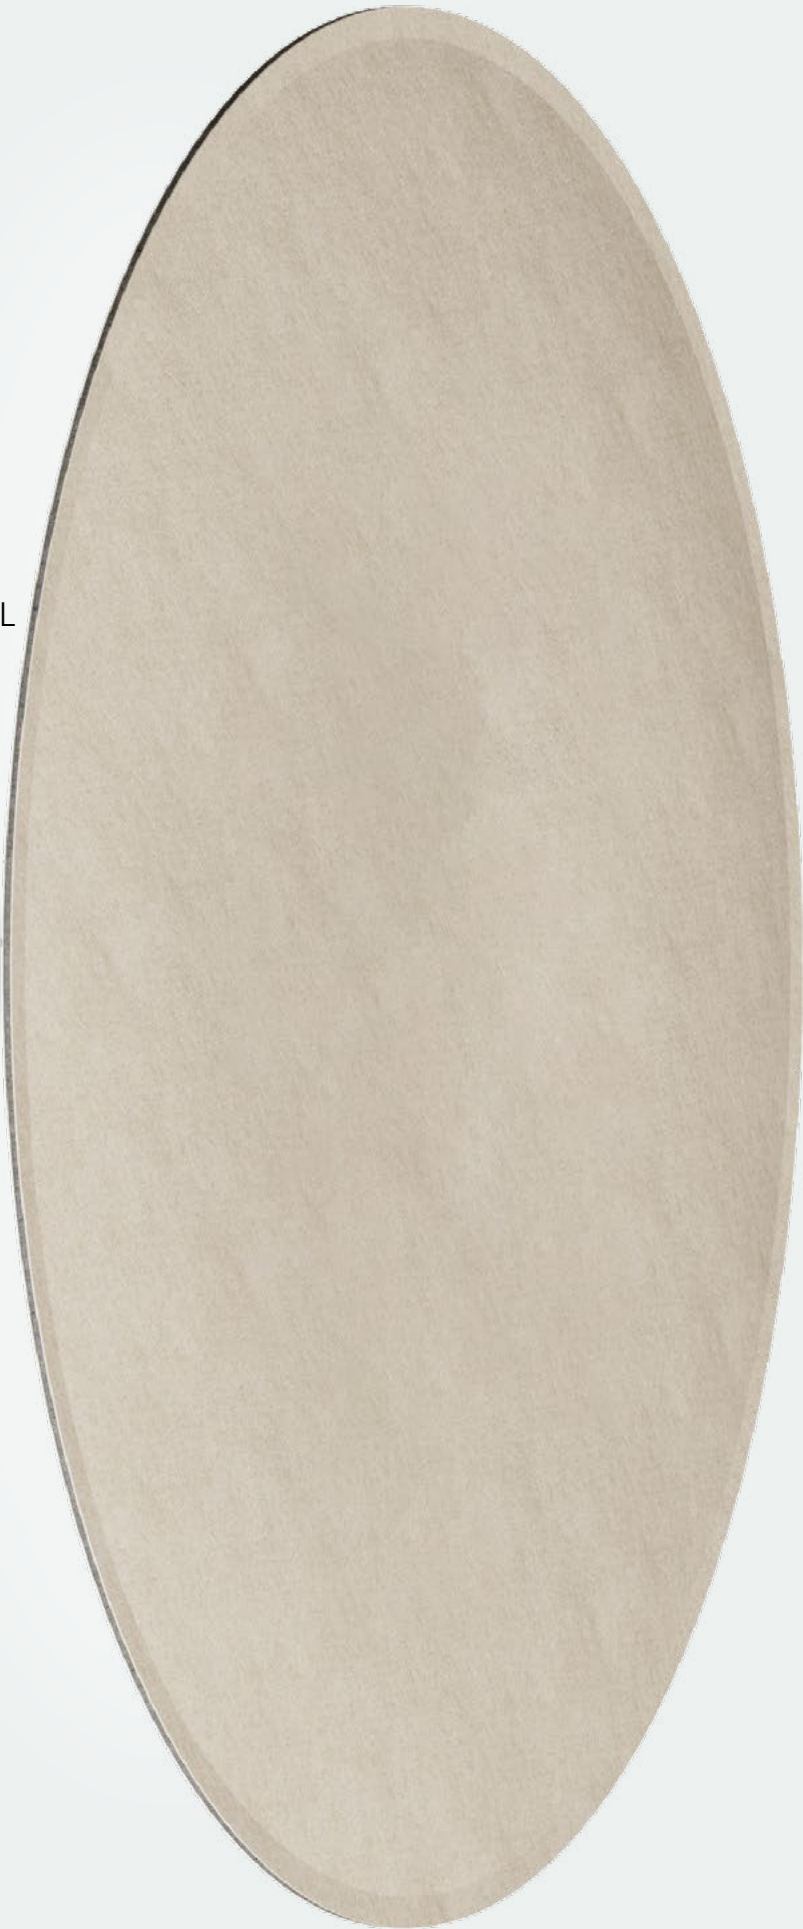

ROTUND WALL

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material: PET Felt, 60% recycled from plastic bottles

Weight: apx. 1500 g/m²

Thickness by diameter: Ø600 mm: Max. 30mm, min. 6mm. (+/- 2mm)
Ø1200 mm: Max. 45mm, min. 6mm. (+/- 2mm)

Flammability: US: ASTM 84 A Class
EU: EN 13501 / Result "B-s1,d0"

Light fastness grade: ISO 105 B02:1994 / Result "4+"

Maintenance: Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Attenuation



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)

 FRG2064	 DPB2055	 GRB2052	 AQT2066	 BEG1012	 SND1013
 SRG1021	 GNR2033	 PKL2031	 BGY2034	 MSG2062	 GCB2082
 BLC2094	 DGR2093	 GRY2092	 LOA2101	 DOA2102	 PRW1091

BODY COLORS

 B	 G	 A	 W	 RAL	 SPE
Black	Grey	Anthracite	White	RAL	Special Colors

LIGHTING TYPES



1
Direct-only



2
Direct-Indirect



3
Indirect-only

MOUNTING TYPES




S
Wall-Mounted

ROTUND WALL


DIAMETER ● Ø1200 MM

COLOR **BEG1012** BEIGE

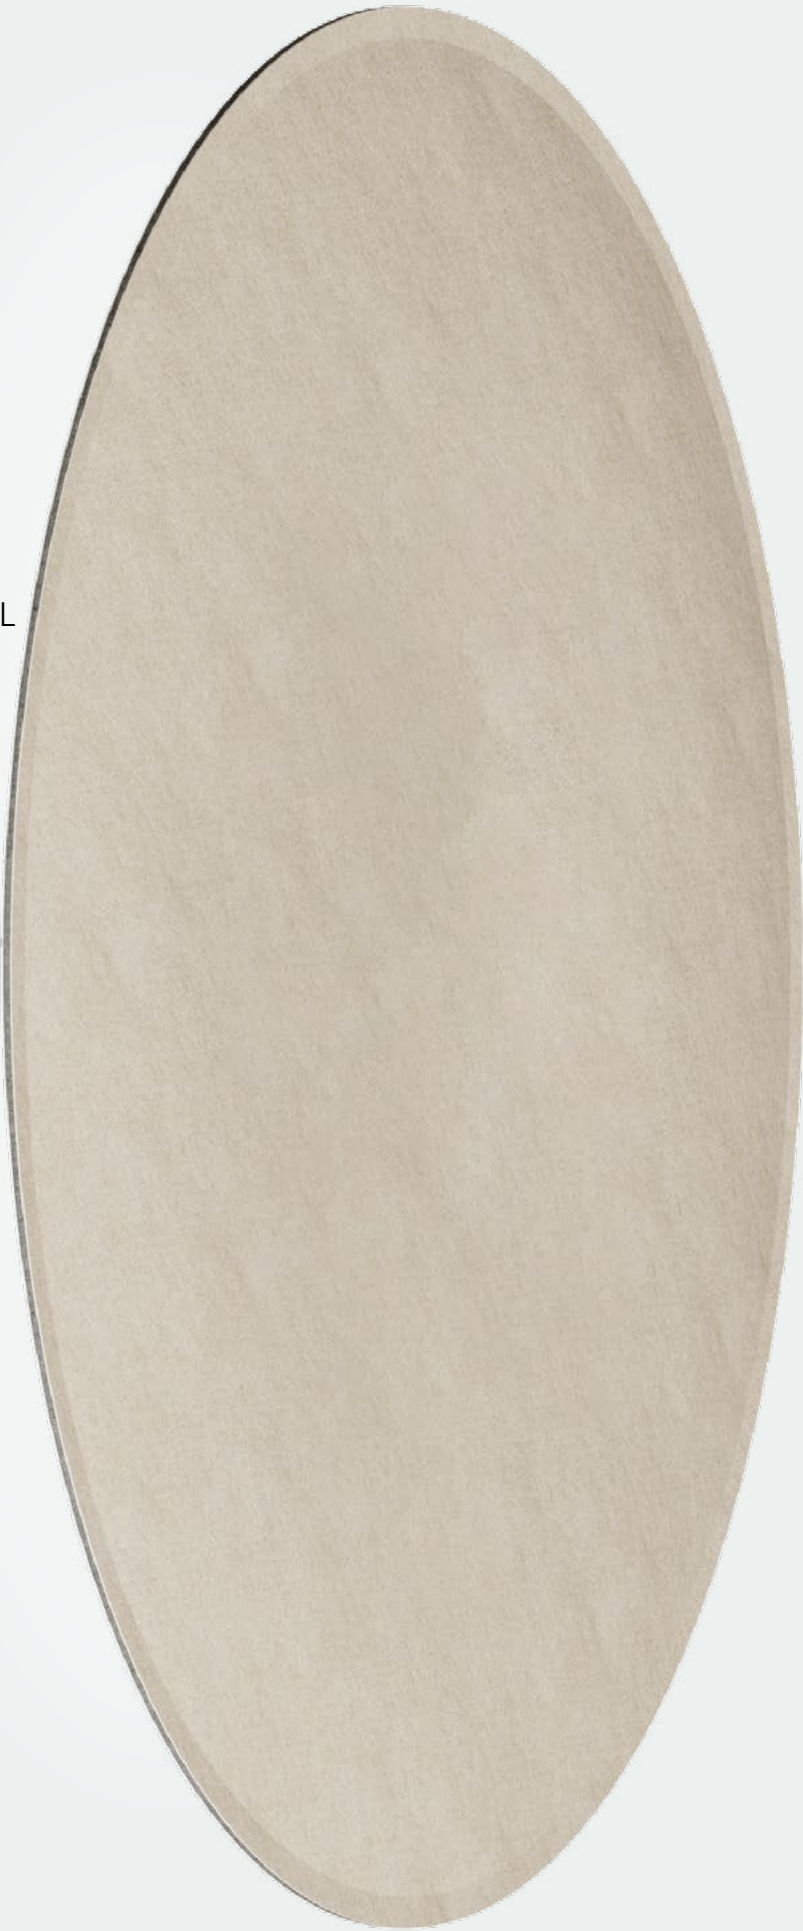



OBLONG

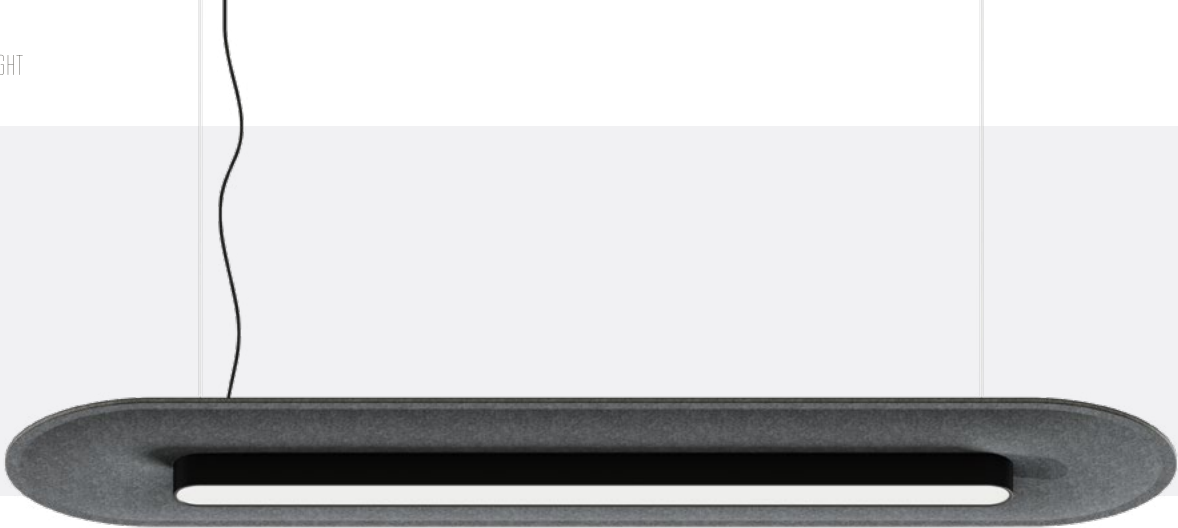

OBLONG

GENERAL INFORMATIONS

Body Parameters


MATERIALS
Aluminum luminaire body / Microprismatic diffuser
/ Pluffy Acoustic material.

MOUNTING
Multi-Point suspended luminaire.

Light Parameters

LIGHT SOURCE
LED, Microprismatic diffuser, Direct only.
CRI>80 or CRI>90.

CONTROL
External driver. ON/OFF, DALI, PushDim,
Bluetooth.

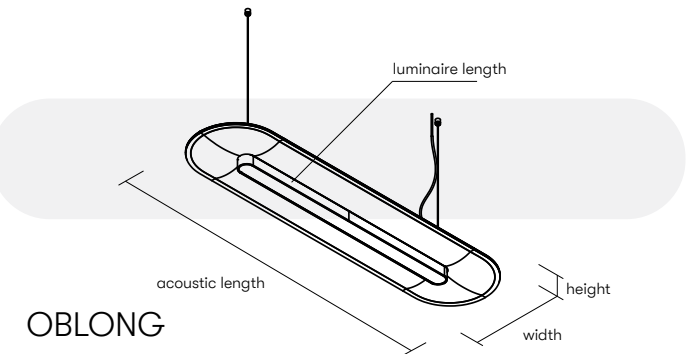

OBLONG

HEIGHT	● 65 mm	
WIDTH	● 300 mm	
LENGTH	● 1200 mm	● 1800 mm
ACOUSTIC:	1200 mm	1800 mm
LUMINAIRE:	860 mm	1420 mm
	20 W / 2000 lm	33 W / 3300 lm

DIFFUSER	COLOR TEMPERATURE	
M microprismatic	2 2700 K	1 RGBW
S standard (opal)	3 3000 K	5 Tunable White
L lenses	4 4000 K	

CE 220V 240V LEDs 50/60Hz



OBLONG

LENGTH ● 1200 MM
COLOR **DGR2093** DARK GREY

OBLONG

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material:	PET Felt, 60% recycled from plastic bottles
Weight:	apx. 1500 g/m²
Thickness:	Max. 30mm (+/- 2mm). Min. 6mm (+/- 2mm).
Flammability:	US: ASTM 84 A Class EU: EN 13501 / Result "B-s1,d0"
Light fastness grade:	ISO 105 B02:1994 / Result "4+"
Maintenance:	Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)

 FRG2064	 DPB2055	 GRB2052	 AQT2066	 BEG1012	 SND1013
 SRG1021	 GNR2033	 PKL2031	 BGY2034	 MSG2062	 CCB2082
 BLC2094	 DGR2093	 GRY2092	 LOA2101	 DOA2102	 PRW1091

BODY COLORS

 B	 G	 A	 W	 RAL	 SPE
Black	Grey	Anthracite	White	RAL	Special Colors

LIGHTING TYPES



1
Direct-only



2
Direct-Indirect



3
Indirect-only

MOUNTING TYPES

with external driver



M
Multi-Point
Pendant



OBLONG
LENGTH ● 1200 MM
COLOR **BEG1012** BEIGE



CLOUD

CLOUD

GENERAL INFORMATION

Body Parameters



MATERIALS
Aluminum luminaire body / Opal diffuser
/ Pluffy Acoustic material.

MOUNTING
Multi-Point suspended luminaire.

Light Parameters

LIGHT SOURCE
LED, Opal diffuser, Direct only.
CRI>80 or CRI>90.


CONTROL
External driver. ON/OFF, DALI, PushDim,
Bluetooth.

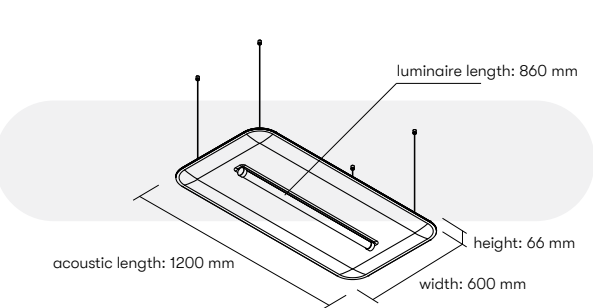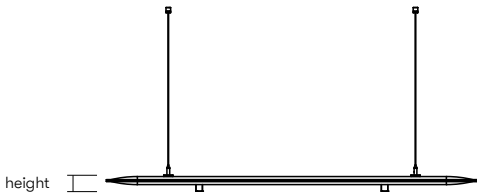

CLOUD SINGLE

HEIGHT	LENGTH
● 66 mm	●
WIDTH	ACOUSTIC: 1200 mm
● 600 mm	LUMINAIRE: 860 mm
	18 W / 1980 lm

DIFFUSER	COLOR TEMPERATURE
M microprismatic	2 2700 K 1 RGBW
S standard (opal)	3 3000 K 5 Tunable White
L lenses	4 4000 K

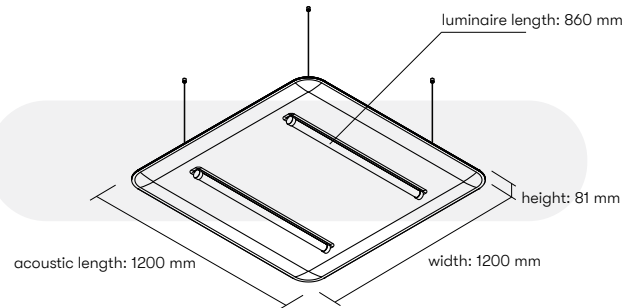


CLOUD DOUBLE

HEIGHT	LENGTH
● 81 mm	●
WIDTH	ACOUSTIC: 1200 mm
● 1200 mm	LUMINAIRE: 860 mm
	36 W / 3960 lm

DIFFUSER	COLOR TEMPERATURE
M microprismatic	2 2700 K 1 RGBW
S standard (opal)	3 3000 K 5 Tunable White
L lenses	4 4000 K

CLOUD DOUBLE

BODY SIZE ● 1200X1200 MM
COLOR **DGR2093** DARK GREY

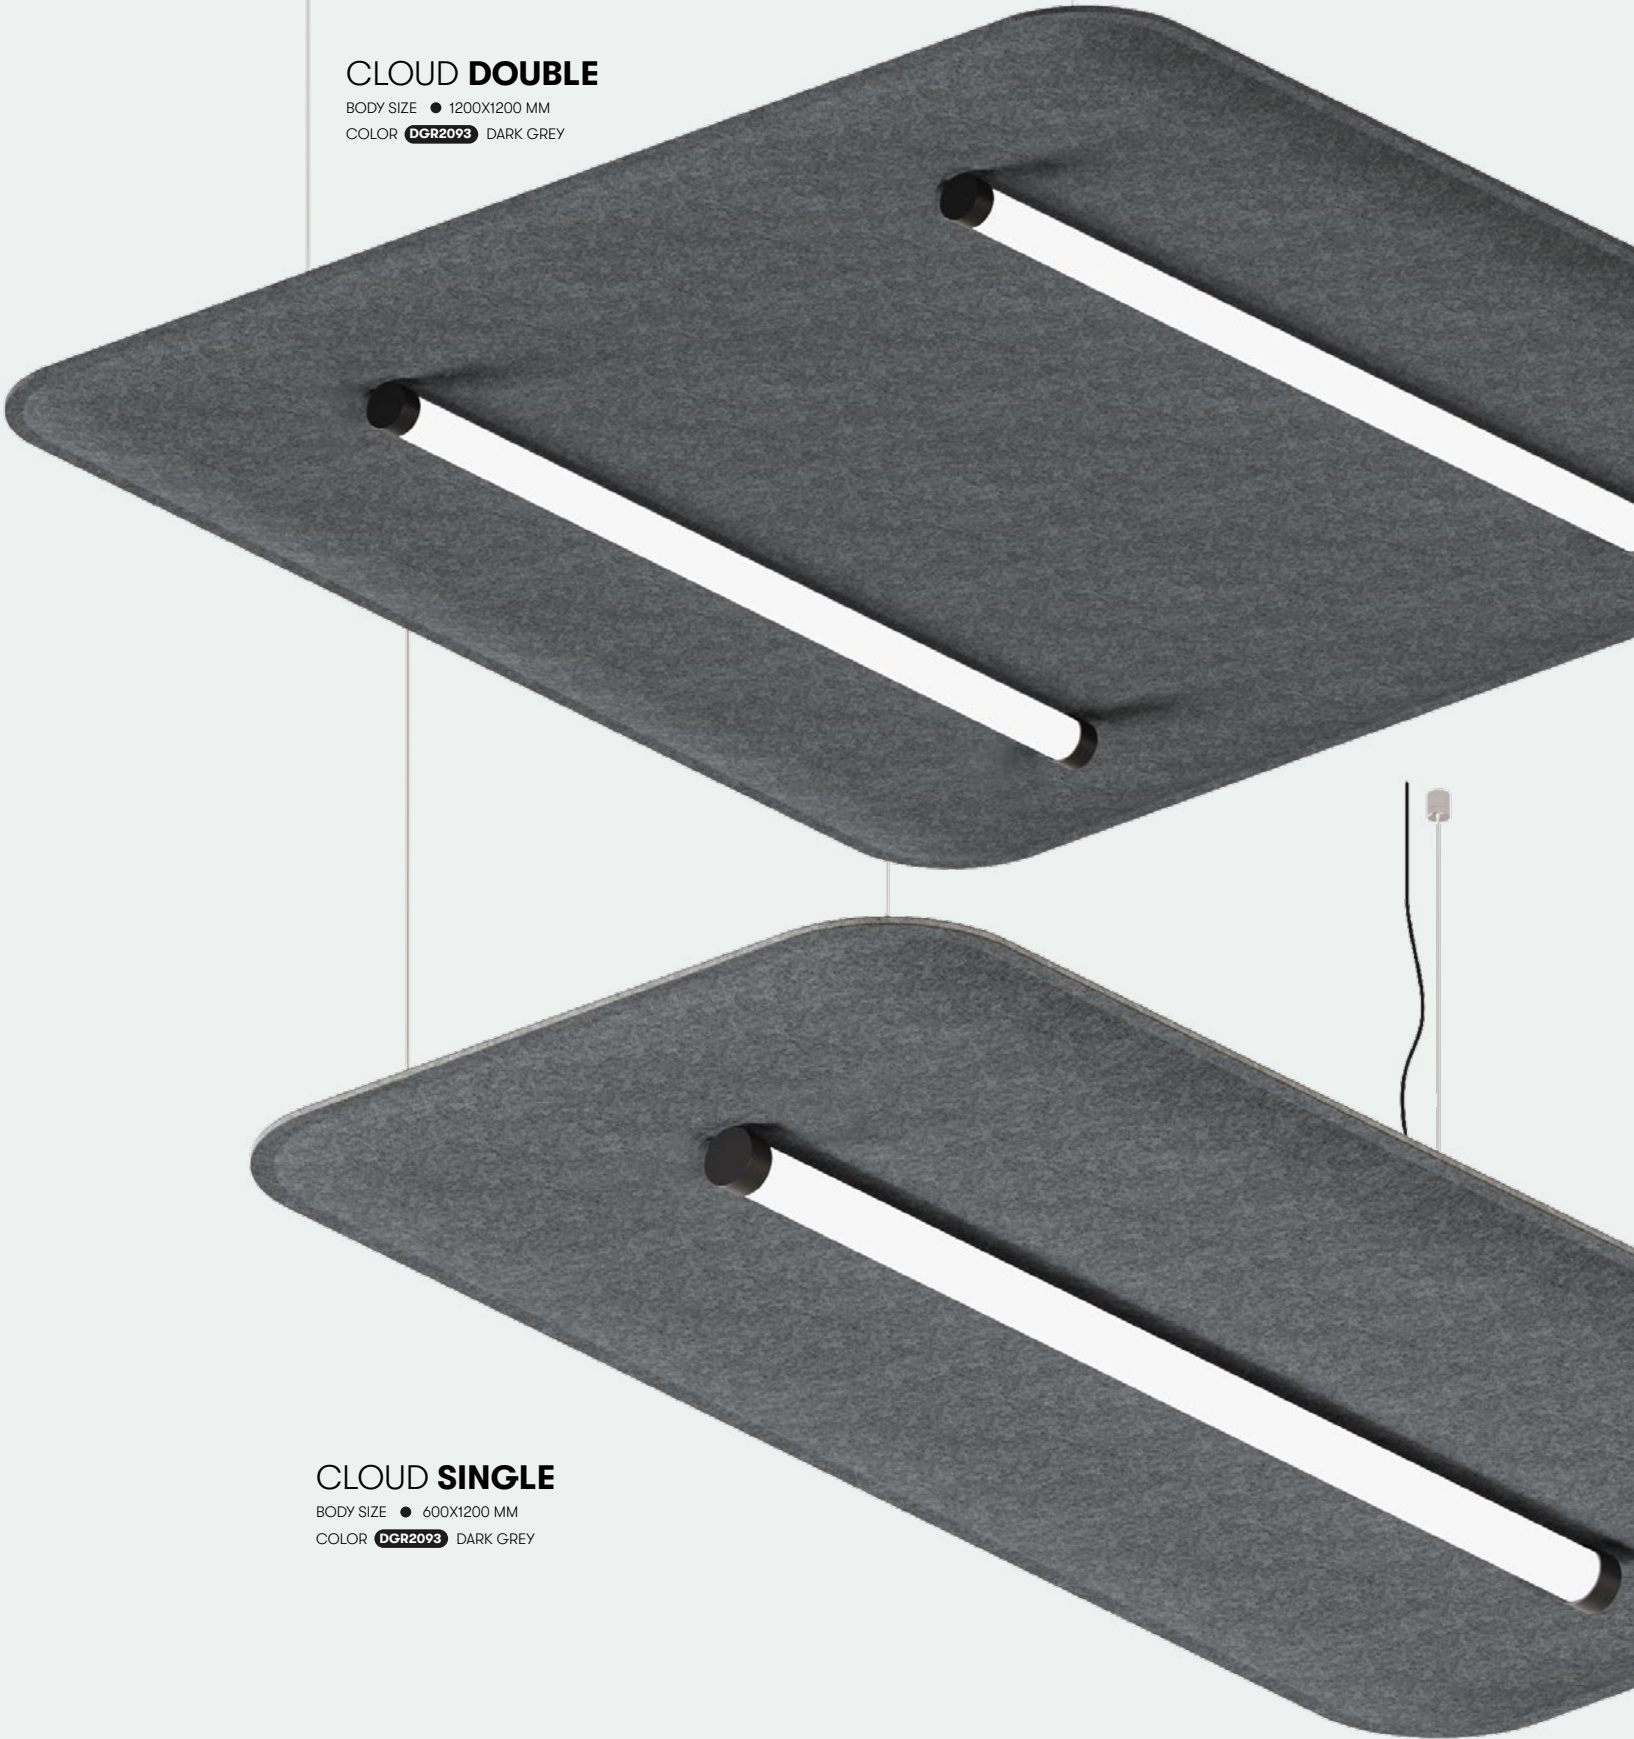

CLOUD SINGLE

BODY SIZE ● 600X1200 MM
COLOR **DGR2093** DARK GREY

CLOUD

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material:	PET Felt, 60% recycled from plastic bottles
Weight:	apx. 1500 g/m²
Thickness by body:	600x1200 mm: Max. 30mm, min. 6mm. (+/- 2mm) 1200x1200 mm: Max. 45mm, min. 6mm. (+/- 2mm)
Flammability:	US: ASTM 84 A Class EU: EN 13501 / Result 'B-s1,d0'
Light fastness grade:	ISO 105 B02:1994 / Result '4++'
Maintenance:	Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Attenuation



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)



FRG2064



DPB2055



GRB2052



AQT2066



BEG1012



SND1013



SRG1021



GNR2033



PKL2031



BGY2034



MSG2062



CCB2082



BLC2094



DGR2093



GRY2092



LOA2101



DOA2102



PRW1091

BODY COLORS



B

Black



G

Grey



A

Anthracite



W

White



RAL

RAL



SPE

Special Colors

LIGHTING TYPES



1

Direct-only



2

Direct-Indirect



3

Indirect-only

MOUNTING TYPES

with external driver



M

Multi-Point
Pendant

CLOUD DOUBLE

BODY SIZE ● 1200X1200 MM
COLOR **BEG1012** BEIGE

CLOUD SINGLE

BODY SIZE ● 600X1200 MM
COLOR **BEG1012** BEIGE



CLOUD DARK

CLOUD DARK

GENERAL INFORMATION

Body Parameters

MATERIALS

Aluminum luminaire body / Microcell diffuser / Pluffy Acoustic material.

MOUNTING

Multi-Point suspended luminaire.



Light Parameters

LIGHT SOURCE

LED, Diffuser with lenses, Direct only. CRI>80 or CRI>90.

CONTROL


External driver. ON/OFF, DALI, PushDim, Bluetooth.

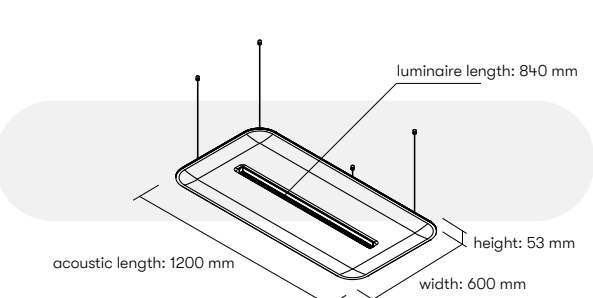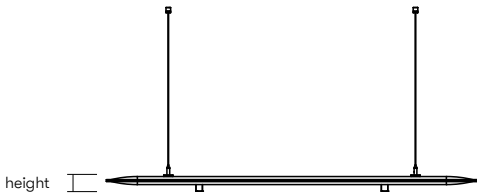

CLOUD DARK SINGLE

HEIGHT	LENGTH
● 53 mm	●
WIDTH	ACOUSTIC: 1200 mm
● 600 mm	LUMINAIRE: 840 mm
	16 W / 1440 lm

DIFFUSER	COLOR TEMPERATURE
M microprismatic	2 2700 K 1 RGBW
S standard (opal)	3 3000 K 5 Tunable White
L lenses	4 4000 K

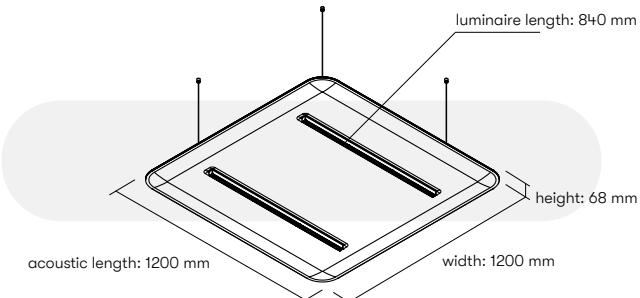


CLOUD DARK DOUBLE

HEIGHT	LENGTH
● 68 mm	●
WIDTH	ACOUSTIC: 1200 mm
● 1200 mm	LUMINAIRE: 840 mm
	32 W / 2880 lm

DIFFUSER	COLOR TEMPERATURE
M microprismatic	2 2700 K 1 RGBW
S standard (opal)	3 3000 K 5 Tunable White
L lenses	4 4000 K

CLOUD DARK DOUBLE

BODY SIZE ● 1200X1200 MM
COLOR **DGR2093** DARK GREY

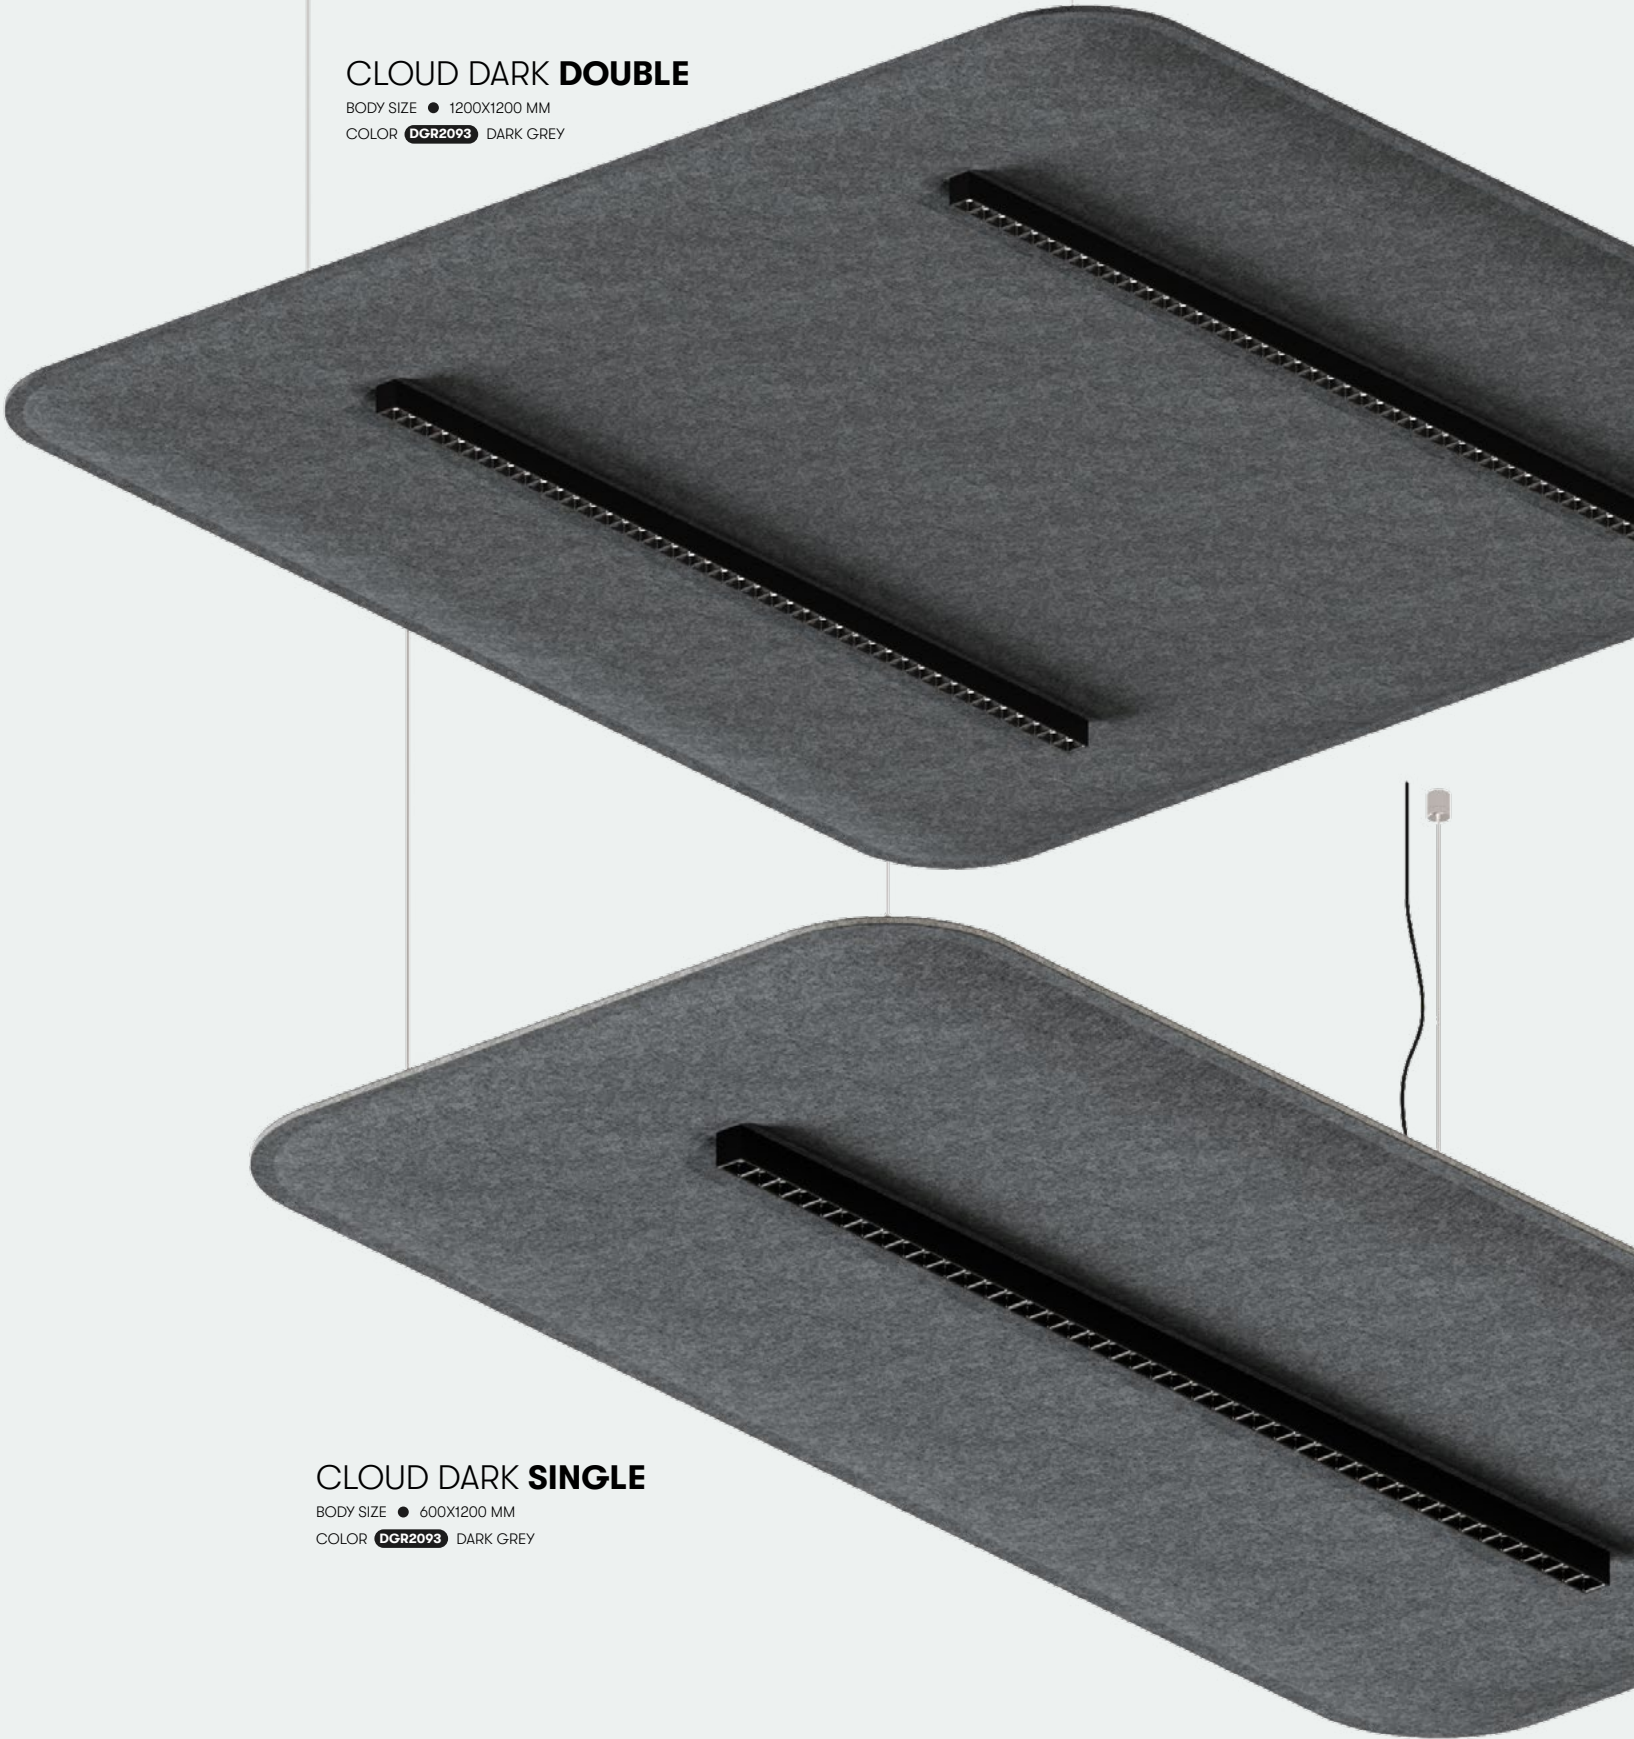

CLOUD DARK SINGLE

BODY SIZE ● 600X1200 MM
COLOR **DGR2093** DARK GREY

CLOUD DARK

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material: PET Felt, 60% recycled from plastic bottles

Weight: apx. 1500 g/m²

Thickness by body: 600x1200 mm: Max. 30mm, min. 6mm. (+/- 2mm)
1200x1200 mm: Max. 45mm, min. 6mm. (+/- 2mm)

Flammability: US: ASTM 84 A Class
EU: EN 13501 / Result "B-s1,d0"

Light fastness grade: ISO 105 B02:1994 / Result "4+"

Maintenance: Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Attenuation



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)

 FRG2064	 DPB2055	 GRB2052	 AQT2066	 BEG1012	 SND1013
 SRG1021	 GNR2033	 PKL2031	 BGY2034	 MSG2062	 CCB2082
 BLC2094	 DGR2093	 GRY2092	 LOA2101	 DOA2102	 PRW1091

BODY COLORS

 B	 G	 A	 W	 RAL	 SPE
Black	Grey	Anthracite	White	RAL	Special Colors

LIGHTING TYPES



1
Direct-only



2
Direct-Indirect



3
Indirect-only

MOUNTING TYPES

with external driver



M
Multi-Point
Pendant

CLOUD DARK DOUBLE

BODY SIZE ● 1200X1200 MM
COLOR **BEG1012** BEIGE

CLOUD DARK SINGLE

BODY SIZE ● 600X1200 MM
COLOR **BEG1012** BEIGE



NOEM

NOEM

GENERAL INFORMATIONS

Body Parameters

MATERIALS
Aluminum luminaire body / Opal, microprismatic diffuser / Pluffy Acoustic material.

MOUNTING
Multi-Point or Single-Point suspended luminaire.

Light Parameters

LIGHT SOURCE
LED, Opal or microprismatic diffuser, Direct only. CRI>80 or CRI>90.

CONTROL
ON/OFF, DALI, PushDim, Bluetooth.



NOEM

HEIGHT	DIAMETER	
● 250 mm	●	●
	ACOUSTIC: Ø600	Ø800
	LUMINAIRE: Ø180x35 mm	Ø180x35 mm
	18 W / 1800 lm	18 W / 1800 lm

DIFFUSER	COLOR TEMPERATURE	
● microprismatic	● 2700 K	● RGBW
● standard (opal)	● 3000 K	● Tunable White
● lenses	● 4000 K	

CE 220V 240V LEDs 50/60Hz

NOEM

DIAMETER ● Ø600 MM
COLOR **DGR2093** DARK GREY



NOEM

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material:	PET Felt, 60% recycled from plastic bottles
Weight:	apx. 1500 g/m²
Thickness:	Max. 16mm (+/- 2mm). Min. 6mm (+/- 2mm).
Flammability:	US: ASTM 84 A Class EU: EN 13501 / Result "B-s1,d0"
Light fastness grade:	ISO 105 B02:1994 / Result "4+"
Maintenance:	Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Low Tone



Mid Tone



High Tone

LIGHTING TYPES



1
Direct-only



2
Direct-Indirect



3
Indirect-only

PLUFFY ACOUSTIC COLORS

(See on page 15)

 FRG2064	 DPB2055	 GRB2052	 AQT2066	 BEG1012	 SND1013
 SRG1021	 GNR2033	 PKL2031	 BGY2034	 MSG2062	 CCB2082
 BLC2094	 DGR2093	 GRY2092	 LOA2101	 DOA2102	 PRW1091

BODY COLORS

 B	 G	 A	 W	 RAL	 SPE
Black	Grey	Anthracite	White	RAL	Special Colors

MOUNTING TYPES



M
Multi-Point
Pendant



P
Single-Point
Pendant



NOEM
DIAMETER ● Ø600 MM
COLOR **BEG1012** BEIGE



NOEM LINEAR

NOEM LINEAR

GENERAL INFORMATIONS

Body Parameters

MATERIALS

Aluminum luminaire body / Opal, microprismatic diffuser / Pluffy Acoustic material.

MOUNTING

Multi-Point suspended luminaire.


Light Parameters

LIGHT SOURCE

LED, Opal or microprismatic diffuser, Direct only.
CRI>80 or CRI>90.

CONTROL

ON/OFF, DALI, PushDim, Bluetooth.

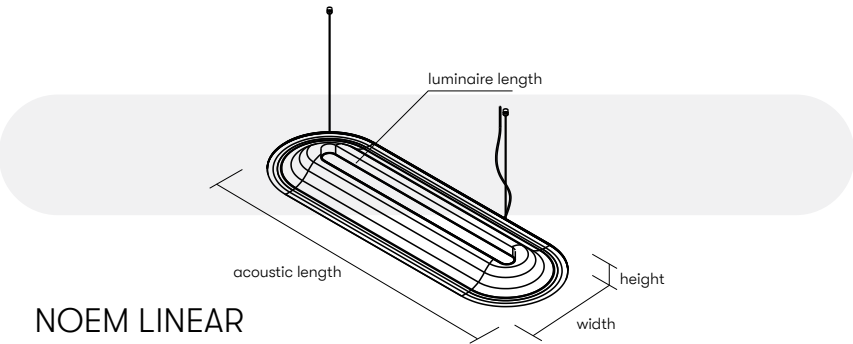

NOEM LINEAR

HEIGHT	LENGTH		
	● 90 mm	● 1300 mm	● 1950 mm
WIDTH	● 400 mm	ACOUSTIC: 1300 mm	1950 mm
		LUMINAIRE: 860 mm	1510 mm
		20 W / 2500 lm	35 W / 3500 lm
			50 W / 5000 lm

DIFFUSER		COLOR TEMPERATURE	
M	microprismatic	2	2700 K
S	standard (opal)	3	3000 K
L	lenses	4	4000 K
		1	RGBW
		5	Tunable White



NOEM LINEAR

LENGTH ● 1300 mm
COLOR **DGR2093** DARK GREY

NOEM LINEAR

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material:	PET Felt, 60% recycled from plastic bottles
Weight:	apx. 1500 g/m²
Thickness:	Max. 16mm (+/- 2mm). Min. 6mm (+/- 2mm).
Flammability:	US: ASTM 84 A Class EU: EN 13501 / Result "B-s1,d0"
Light fastness grade:	ISO 105 B02:1994 / Result "4+"
Maintenance:	Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)

 FRG2064	 DPB2055	 GRB2052	 AQT2066	 BEG1012	 SND1013
 SRG1021	 GNR2033	 PKL2031	 BGY2034	 MSG2062	 CCB2082
 BLC2094	 DGR2093	 GRY2092	 LOA2101	 DOA2102	 PRW1091

BODY COLORS

 B	 G	 A	 W	 RAL	 SPE
Black	Grey	Anthracite	White	RAL	Special Colors

LIGHTING TYPES


1
Direct-only


2
Direct-Indirect


3
Indirect-only

MOUNTING TYPES


M
Multi-Point
Pendant


P
Single-Point
Pendant



NOEM LINEAR
LENGTH ● 1300 MM
COLOR **BEG1012** BEIGE



TONDO FREE STAND

TONDO FREE STAND

GENERAL INFORMATION

Body Parameters



MATERIALS
Aluminum luminaire body / Opal, microprismatic diffuser / Pluffy Acoustic material.

MOUNTING
Free standing luminaire, position on the floor.

Light Parameters

LIGHT SOURCE
LED, Opal or microprismatic diffuser, Direct only or Direct-Indirect. CRI>80 or CRI>90.

CONTROL
ON/OFF, DALI, PushDim, Bluetooth.

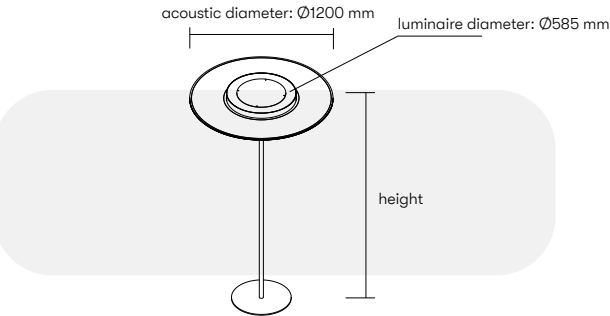

TONDO FREE STAND

HEIGHT	DIAMETER
● 2110 mm	●
	ACOUSTIC: Ø1200 mm
	LUMINAIRE: Ø585 mm
	D: 65 W / 7100 lm
	D/I: 99 W / 11000 lm

DIFFUSER	COLOR TEMPERATURE
● microprismatic	● 2700 K ● RGBW
● standard (opal)	● 3000 K ● Tunable White
● lenses	● 4000 K

CE 220V 240V LEDs 50/60Hz

TONDO FREE STAND

DIAMETER ● Ø1200 mm
COLOR **BEG1012** BEIGE



TONDO FREE STAND

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material:	PET Felt, 60% recycled from plastic bottles
Weight:	apx. 1500 g/m²
Thickness:	Max. 30mm (+/- 2mm). Min. 6mm (+/- 2mm).
Flammability:	US: ASTM 84 A Class EU: EN 13501 / Result "B-s1,d0"
Light fastness grade:	ISO 105 B02:1994 / Result "4+"
Maintenance:	Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Attenuation



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)



FRG2064



DPB2055



GRB2052



AQT2066



BEG1012



SND1013



SRG1021



GNR2033



PKL2031



BGY2034



MSG2062



GCB2082



BLC2094



DGR2093



GRY2092



LOA2101



DOA2102



PRW1091

BODY COLORS



B

Black



G

Grey



A

Anthracite



W

White



RAL

RAL



SPE

Special Colors

LIGHTING TYPES



1

Direct-only



2

Direct-Indirect



3

Indirect-only

MOUNTING TYPES



F

Free Stand

TONDO FREE STAND

DIAMETER ● Ø1200 MM
COLOR **BEG1012** BEIGE





TONDO PENDANT

TONDO PENDANT

GENERAL INFORMATION

Body Parameters


MATERIALS
Aluminum luminaire body / Opal, microprismatic diffuser / Pluffy Acoustic material.

MOUNTING
Multi-Point or Single-Point suspended luminaire.

Light Parameters

LIGHT SOURCE
LED, Opal or microprismatic diffuser, Direct only or Direct-Indirect. CRI>80 or CRI>90.

CONTROL
ON/OFF, DALI, PushDim, Bluetooth.

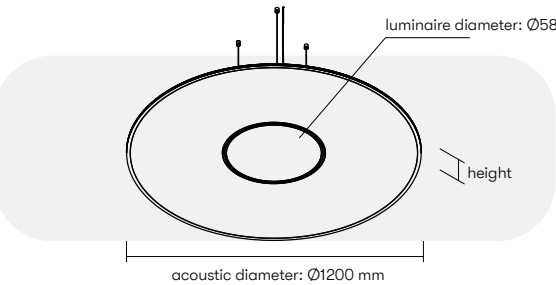


TONDO PENDANT

HEIGHT	DIAMETER
● 75 mm	●
	ACOUSTIC: Ø1200 mm
	LUMINAIRE: Ø585 mm
	D: 65 W / 7100 lm
	D/I: 99 W / 11000 lm

DIFFUSER	COLOR TEMPERATURE
M microprismatic	2 2700 K
S standard (opal)	3 3000 K
L lenses	4 4000 K
	1 RGBW
	5 Tunable White

TONDO PLAIN

HEIGHT	DIAMETER
● 45 mm	● Ø1200 mm

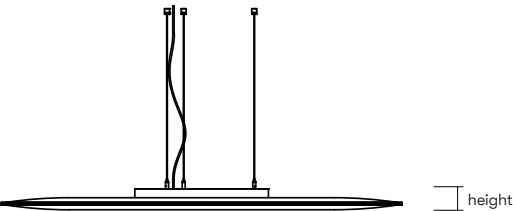

TONDO PENDANT

DIAMETER ● Ø1200 mm
COLOR BEG1012 BEIGE



TONDO PENDANT

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material: PET Felt, 60% recycled from plastic bottles

Weight: apx. 1500 g/m²

Thickness: Max. 30mm (+/- 2mm).
Min. 6mm (+/- 2mm).

Flammability: US: ASTM 84 A Class
EU: EN 13501 / Result "B-s1,d0"

Light fastness grade: ISO 105 B02:1994 / Result "4+"

Maintenance: Indoor use only. Cleaning methods:
Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean.
Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Attenuation



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)

 FRG2064	 DPB2055	 GRB2052	 AQT2066	 BEG1012	 SND1013
 SRG1021	 GNR2033	 PKL2031	 BGY2034	 MSG2062	 CCB2082
 BLC2094	 DGR2093	 GRY2092	 LOA2101	 DOA2102	 PRW1091

BODY COLORS

					
B	G	A	W	R	S
Black	Grey	Anthracite	White	RAL	Special Colors

LIGHTING TYPES



1

Direct-only



2

Direct-Indirect



3

Indirect-only

MOUNTING TYPES



M

Multi-Point
Pendant



P

Single-Point
Pendant

TONDO PENDANT

DIAMETER ● Ø1200 MM
COLOR **BEG1012** BEIGE





TONDO DESK

TONDO DESK

GENERAL INFORMATION

Body Parameters


MATERIALS
Aluminum luminaire body / Opal, microprismatic diffuser / Pluffy Acoustic material.

MOUNTING
Luminaire is mounted to desk.

Light Parameters

LIGHT SOURCE
LED, Opal or microprismatic diffuser, Direct only or Direct-Indirect. CRI>80 or CRI>90.

CONTROL
ON/OFF, DALI, PushDim, Bluetooth.

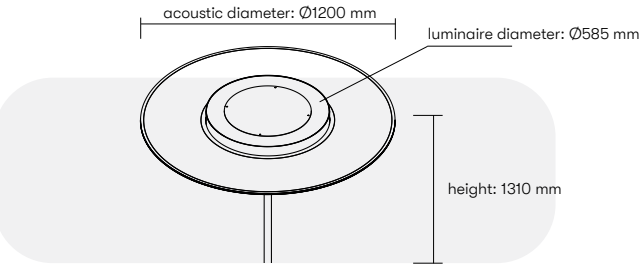

TONDO DESK

HEIGHT	DIAMETER
● 1310 mm	●
	ACOUSTIC: Ø1200 mm
	LUMINAIRE: Ø585 mm
	D: 65 W / 7100 lm
	D/I: 99 W / 11000 lm

DIFFUSER	COLOR TEMPERATURE
● microprismatic	● 2700 K ● RGBW
● standard (opal)	● 3000 K ● Tunable White
● lenses	● 4000 K

CE 220V 240V LEDs 50/60Hz

Lumen values are calculated at 4000K.

TONDO DESK

DIAMETER ● Ø1200 MM
COLOR ● BEG1012 BEIGE



TONDO DESK

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material:	PET Felt, 60% recycled from plastic bottles
Weight:	apx. 1500 g/m²
Thickness:	Max. 30mm (+/- 2mm). Min. 6mm (+/- 2mm).
Flammability:	US: ASTM 84 A Class EU: EN 13501 / Result "B-s1,d0"
Light fastness grade:	ISO 105 B02:1994 / Result "4+"
Maintenance:	Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Attenuation



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)



FRG2064



DPB2055



GRB2052



AQT2066



BEG1012



SND1013



SRG1021



GNR2033



PKL2031



BGY2034



MSG2062



CCB2082



BLC2094



DGR2093



GRY2092



LOA2101



DOA2102



PRW1091

BODY COLORS



B

Black



G

Grey



A

Anthracite



W

White



RAL

RAL



SPE

Special Colors

LIGHTING TYPES



1

Direct-only



2

Direct-Indirect



3

Indirect-only

MOUNTING TYPES




A

Desk mounted

TONDO **DESK**
DIAMETER ● Ø1200 MM
COLOR **BEG1012** BEIGE



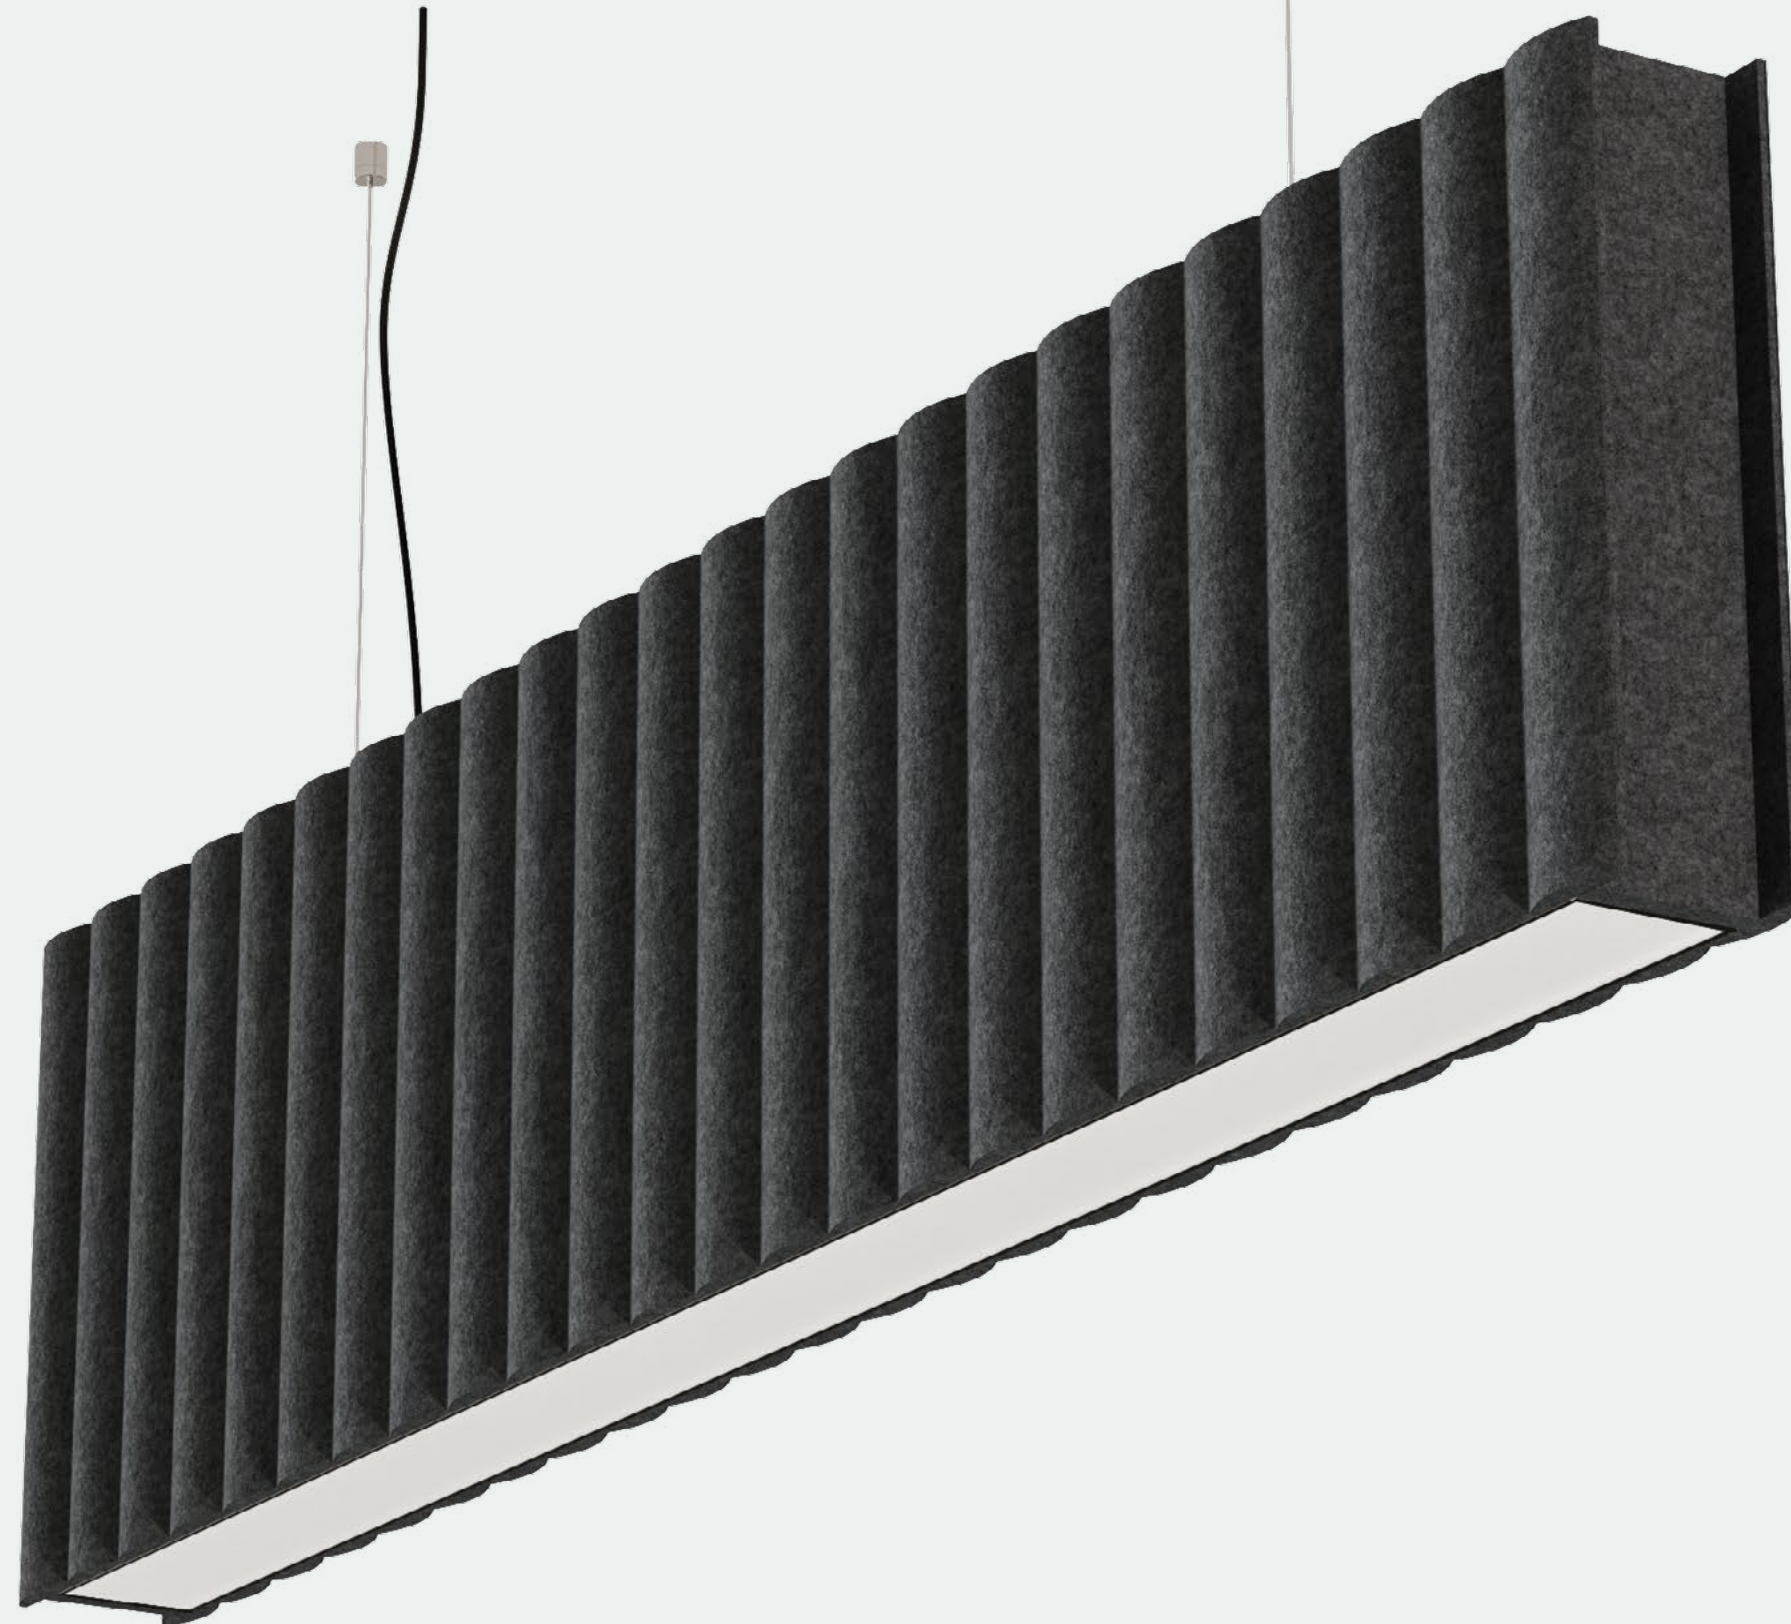

RODA

RODA

GENERAL INFORMATIONS

Body Parameters

MATERIALS

Aluminum luminaire body / Opal, microprismatic diffuser / Pluffy Acoustic material.

MOUNTING

Multi-Point suspended luminaire.


Light Parameters

LIGHT SOURCE

LED, Opal or microprismatic diffuser, Direct only or Direct-Indirect. CRI>80 or CRI>90.

CONTROL


ON/OFF, DALI, PushDim, Bluetooth.

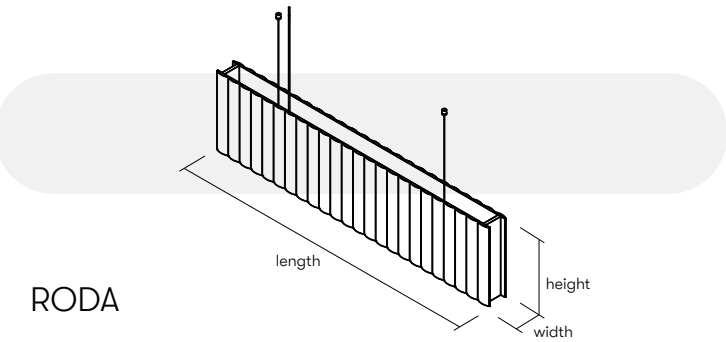

RODA

HEIGHT	● 300 mm	
WIDTH	● 76 mm	
LENGTH	●	
	ACOUSTIC:	1200 mm 2320mm
	D:	26 W / 2600 lm 52 W / 5200 lm
	D/I:	39 W / 3900 lm 78 W / 7800 lm

DIFFUSER		COLOR TEMPERATURE	
Ⓜ	microprismatic	②	2700 K
Ⓢ	standard (opal)	③	3000 K
Ⓛ	lenses	④	4000 K
		①	RGBW
		⑤	Tunable White

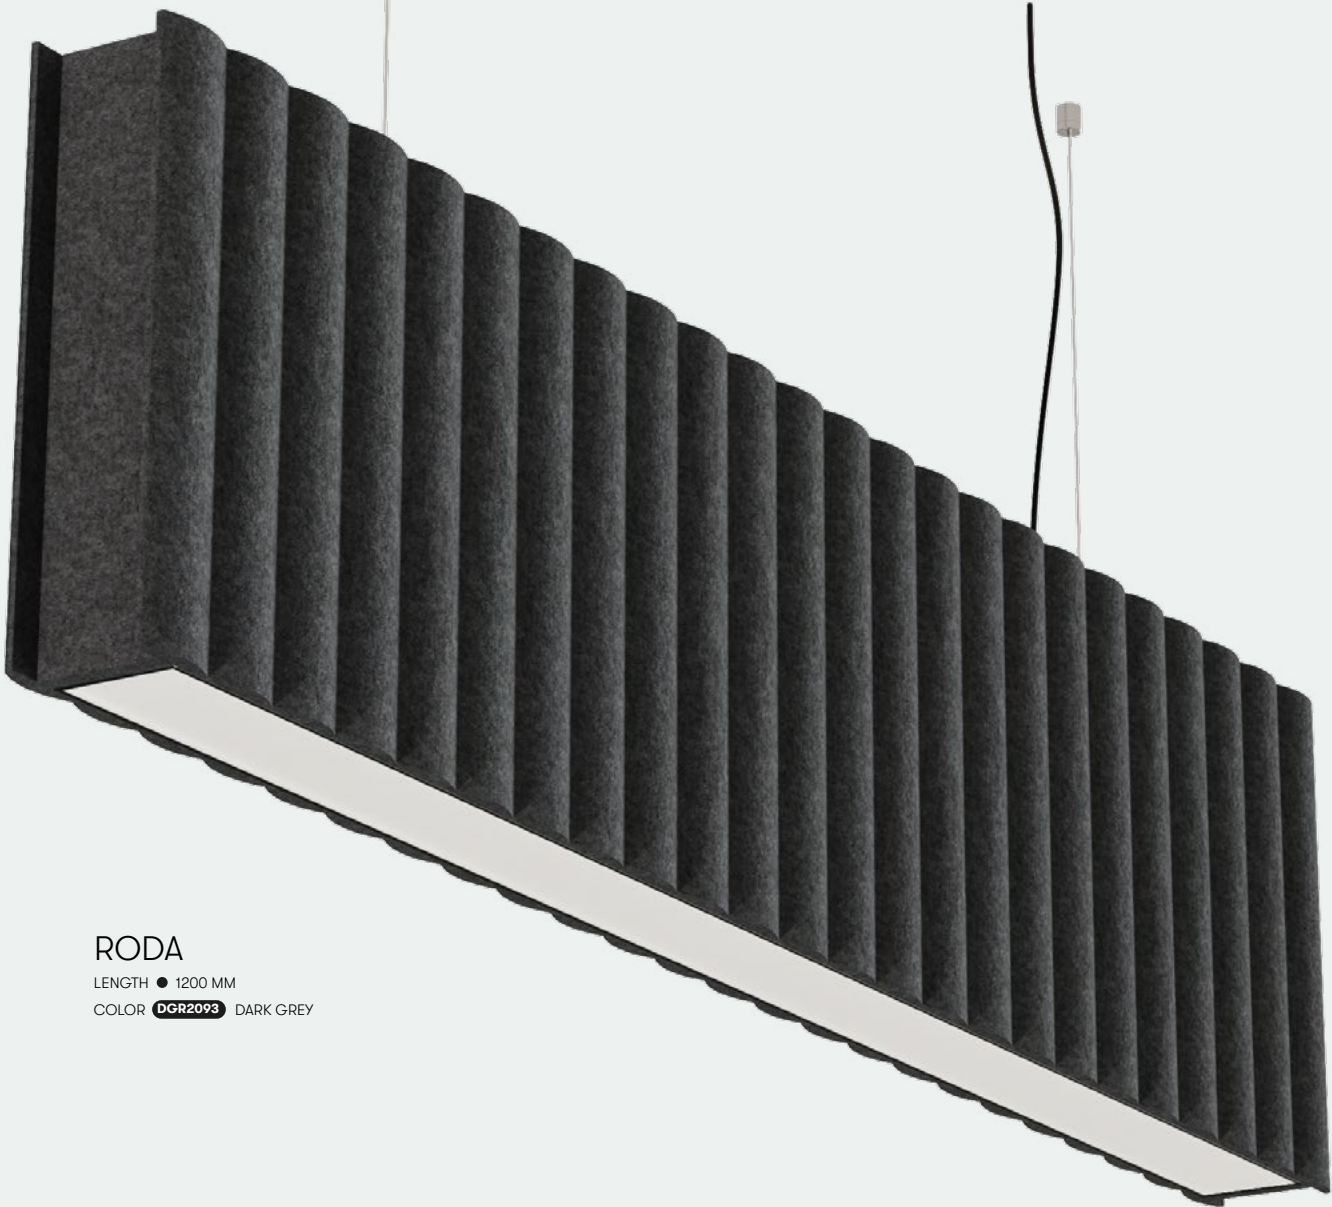

RODA
LENGTH ● 1200 MM
COLOR **DGR2093** DARK GREY

RODA

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material: PET Felt, 60% recycled from plastic bottles

Weight: apx. 1500 g/m²

Thickness: Max. 13mm (+/- 2mm).
Min. 6mm (+/- 2mm).

Flammability: US: ASTM 84 A Class
EU: EN 13501 / Result "B-s1,d0"

Light fastness grade: ISO 105 B02:1994 / Result "4+"

Maintenance: Indoor use only. Cleaning methods:
Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean.
Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)

 FRG2064	 DPB2055	 GRB2052	 AQT2066	 BEG1012	 SND1013
 SRG1021	 GNR2033	 PKL2031	 BGY2034	 MSG2062	 GCB2082
 BLC2094	 DGR2093	 GRY2092	 LOA2101	 DOA2102	 PRW1091

BODY COLORS

 B	 G	 A	 W	 RAL	 SPE
Black	Grey	Anthracite	White	RAL	Special Colors

LIGHTING TYPES



1
Direct-only



2
Direct-Indirect




3
Indirect-only

MOUNTING TYPES



M
Multi-Point
Pendant

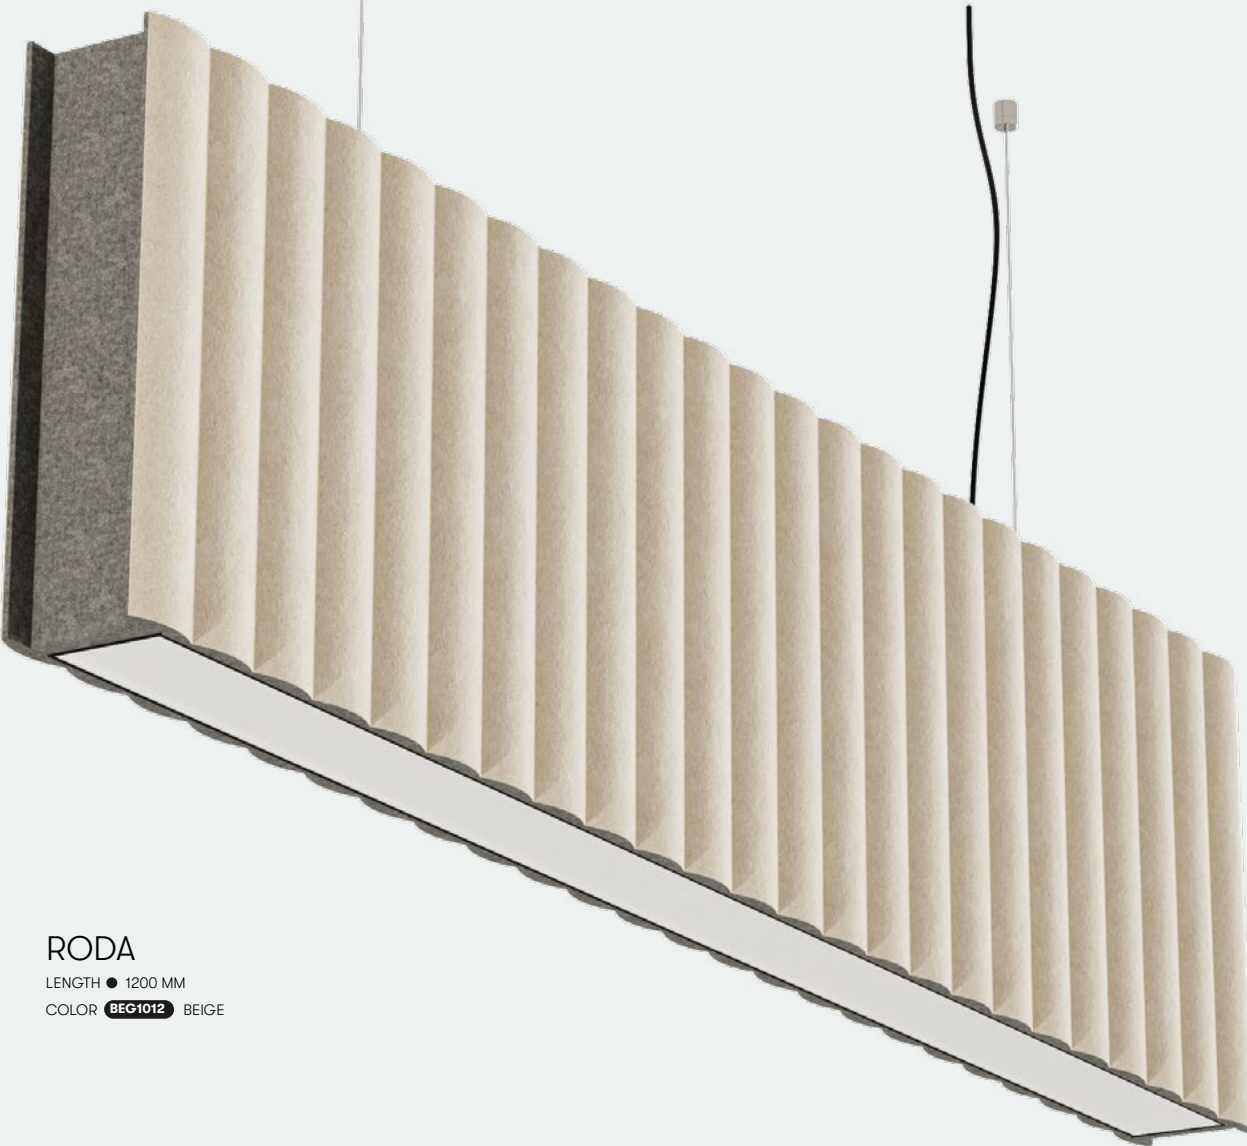

RODA
LENGTH ● 1200 MM
COLOR **BEG1012** BEIGE



FURRY

FURRY

GENERAL INFORMATION

Body Parameters

MATERIALS

Aluminum luminaire body / Lenses
/ Pluffy Acoustic material.

MOUNTING

Multi-Point or Single-Point suspended
luminaire.


Light Parameters

LIGHT SOURCE

LED, Diffuser with lenses, Direct only.
CRI>80 or CRI>90.

CONTROL

External driver. ON/OFF, DALI, PushDim,
Bluetooth.



FURRY

HEIGHT

● 300 mm

DIAMETER

●
ACOUSTIC: Ø500 mm
10 W / 1100 lm

DIFFUSER

- 1 microprismatic
- 2 standard (opal)
- 3 lenses

COLOR TEMPERATURE

- 1 2700 K
- 2 3000 K
- 3 4000 K
- 4 RGBW
- 5 Tunable White

CE 220V 240V LEDs 50/60Hz



FURRY

DIAMETER ● Ø500 MM
COLOR **BLC2094** BLACK



FURRY

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material: PET Felt, 60% recycled from plastic bottles

Weight: apx. 1500 g/m²


Thickness: Max. 16mm (+/- 2mm).
Min. 6mm (+/- 2mm).

Flammability: US: ASTM 84 A Class
EU: EN 13501 / Result "B-s1,d0"

Light fastness grade: ISO 105 B02:1994 / Result "4+"

Maintenance: Indoor use only. Cleaning methods:
Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean.
Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



PLUFFY ACOUSTIC COLORS

(See on page 15)



BODY COLORS




LIGHTING TYPES



MOUNTING TYPES

with external driver



FURRY

DIAMETER ● Ø500 MM

COLOR **BEG1012** BEIGE





ILONA ACOUSTIC



ILONA ACOUSTIC

GENERAL INFORMATIONS

Body Parameters


MATERIALS
Aluminum luminaire body / Opal diffuser
/ Pluffy Acoustic material.

MOUNTING
Multi-Point or Single-Point suspended
luminaire.

Light Parameters

LIGHT SOURCE
LED, Opal diffuser, Direct only.
CRI>80 or CRI>90.

CONTROL
External driver. ON/OFF, DALI, PushDim,
Bluetooth.

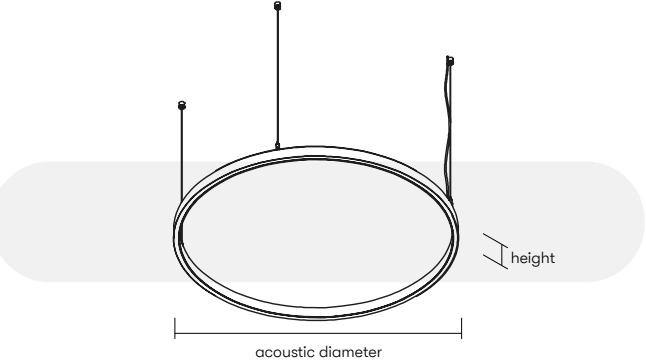

ILONA ACOUSTIC

HEIGHT	DIAMETER	
● 58 mm	●	●
PROFILE	Ø600 mm	Ø1200mm
WIDTH	39 W / 2370 lm	79 W / 4748 lm
● 25 mm		

DIFFUSER		COLOR TEMPERATURE	
1 microprismatic	2 2700 K	1 RGBW	
3 standard (opal)	3 3000 K	5 Tunable White	
4 lenses	4 4000 K		

CE 220V 240V LEDs 50/60Hz

Lumen values are calculated at 4000K.

ILONA DARK ACOUSTIC

DIAMETER ● Ø1200 MM



ILONA ACOUSTIC

DIAMETER ● Ø600 MM
COLOR DGR2093 DARK GREY

ILONA DARK ACOUSTIC

DIAMETER ● Ø600 MM
COLOR BEG1012 BEIGE

ILONA ACOUSTIC

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material: PET Felt, 60% recycled from plastic bottles

Weight: apx. 1500 g/m²

Thickness by diameter: Ø600 mm: Max. 30mm, min. 6mm. (+/- 2mm)
Ø1200 mm: Max. 45mm, min. 6mm. (+/- 2mm)

Flammability: US: ASTM 84 A Class
EU: EN 13501 / Result "B-s1,d0"

Light fastness grade: ISO 105 B02:1994 / Result "4+"

Maintenance: Indoor use only. Cleaning methods:
Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean.
Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Attenuation



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)

 FRG2064	 DPB2055	 GRB2052	 AQT2066	 BEG1012	 SND1013
 SRG1021	 GNR2033	 PKL2031	 BGY2034	 MSG2062	 CCB2082
 BLC2094	 DGR2093	 GRY2092	 LOA2101	 DOA2102	 PRW1091

BODY COLORS

 B	 G	 A	 W	 RAL	 SPE
Black	Grey	Anthracite	White	RAL	Special Colors

LIGHTING TYPES



1
Direct-only



2
Direct-Indirect



3
Indirect-only

MOUNTING TYPES

with external driver



M
Multi-Point
Pendant



P
Single-Point
Pendant



ILONA ACOUSTIC
DIAMETER ● Ø600 MM

ILONA ACOUSTIC
DIAMETER ● Ø1200 MM
COLOR **DGR2093** DARK GREY



ILONA DARK ACOUSTIC



ILONA DARK ACOUSTIC

GENERAL INFORMATIONS

Body Parameters

MATERIALS

Aluminum luminaire body / Microcell diffuser / Pluffy Acoustic material.

MOUNTING

Multi-Point or Single-Point suspended luminaire.


Light Parameters

LIGHT SOURCE

LED, Diffuser with lenses, Direct only. CRI>80 or CRI>90.

CONTROL

External driver. ON/OFF, DALI, PushDim, Bluetooth.

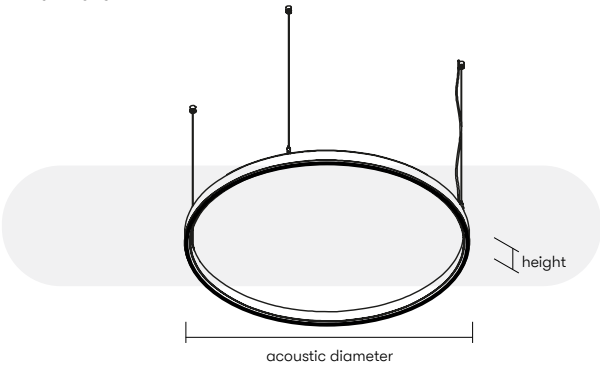

ILONA ACOUSTIC

HEIGHT	DIAMETER	
● 58 mm	● Ø600 mm	● Ø1200mm
PROFILE WIDTH	27 W / 2700 lm	45 W / 4500 lm
● 25 mm		


DIFFUSER		COLOR TEMPERATURE	
1 microprismatic	2 2700 K	1 RGBW	
3 standard (opal)	3 3000 K	5 Tunable White	
4 lenses	4 4000 K		

CE 220V 240V LEDs 50/60Hz

Lumen values are calculated at 4000K.

ILONA DARK ACOUSTIC

DIAMETER ● Ø1200 MM

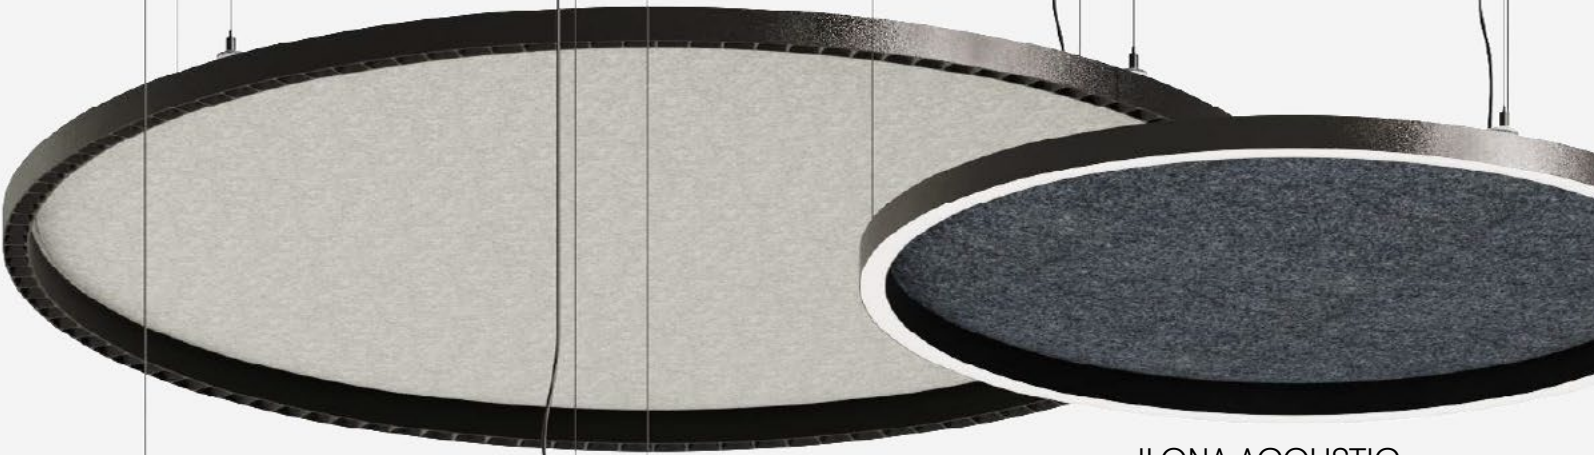

ILONA ACOUSTIC

DIAMETER ● Ø600 MM
COLOR DGR2093 DARK GREY

ILONA DARK ACOUSTIC

DIAMETER ● Ø600 MM
COLOR BEG1012 BEIGE



ILONA ACOUSTIC

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material: PET Felt, 60% recycled from plastic bottles

Weight: apx. 1500 g/m²

Thickness by diameter: Ø600 mm: Max. 30mm, min. 6mm. (+/- 2mm)
Ø1200 mm: Max. 45mm, min. 6mm. (+/- 2mm)

Flammability: US: ASTM 84 A Class
EU: EN 13501 / Result "B-s1,d0"

Light fastness grade: ISO 105 B02:1994 / Result "4+"

Maintenance: Indoor use only. Cleaning methods:
Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean.
Bleach cleanable (only natural colors).

More information about Pluffy Material on catalogue page 14.



Diffusion



Absorption



Attenuation



Low Tone



Mid Tone



High Tone

PLUFFY ACOUSTIC COLORS

(See on page 15)

 FRG2064	 DPB2055	 GRB2052	 AQT2066	 BEG1012	 SND1013
 SRG1021	 GNR2033	 PKL2031	 BGY2034	 MSG2062	 CCB2082
 BLC2094	 DGR2093	 GRY2092	 LOA2101	 DOA2102	 PRW1091

BODY COLORS

 B	 G	 A	 W	 RAL	 SPE
Black	Grey	Anthracite	White	RAL	Special Colors

LIGHTING TYPES



1
Direct-only



2
Direct-Indirect



3
Indirect-only

MOUNTING TYPES

with external driver



M
Multi-Point
Pendant




P
Single-Point
Pendant



FELTLY ACOUSTIC

Luminaires with Feltly material

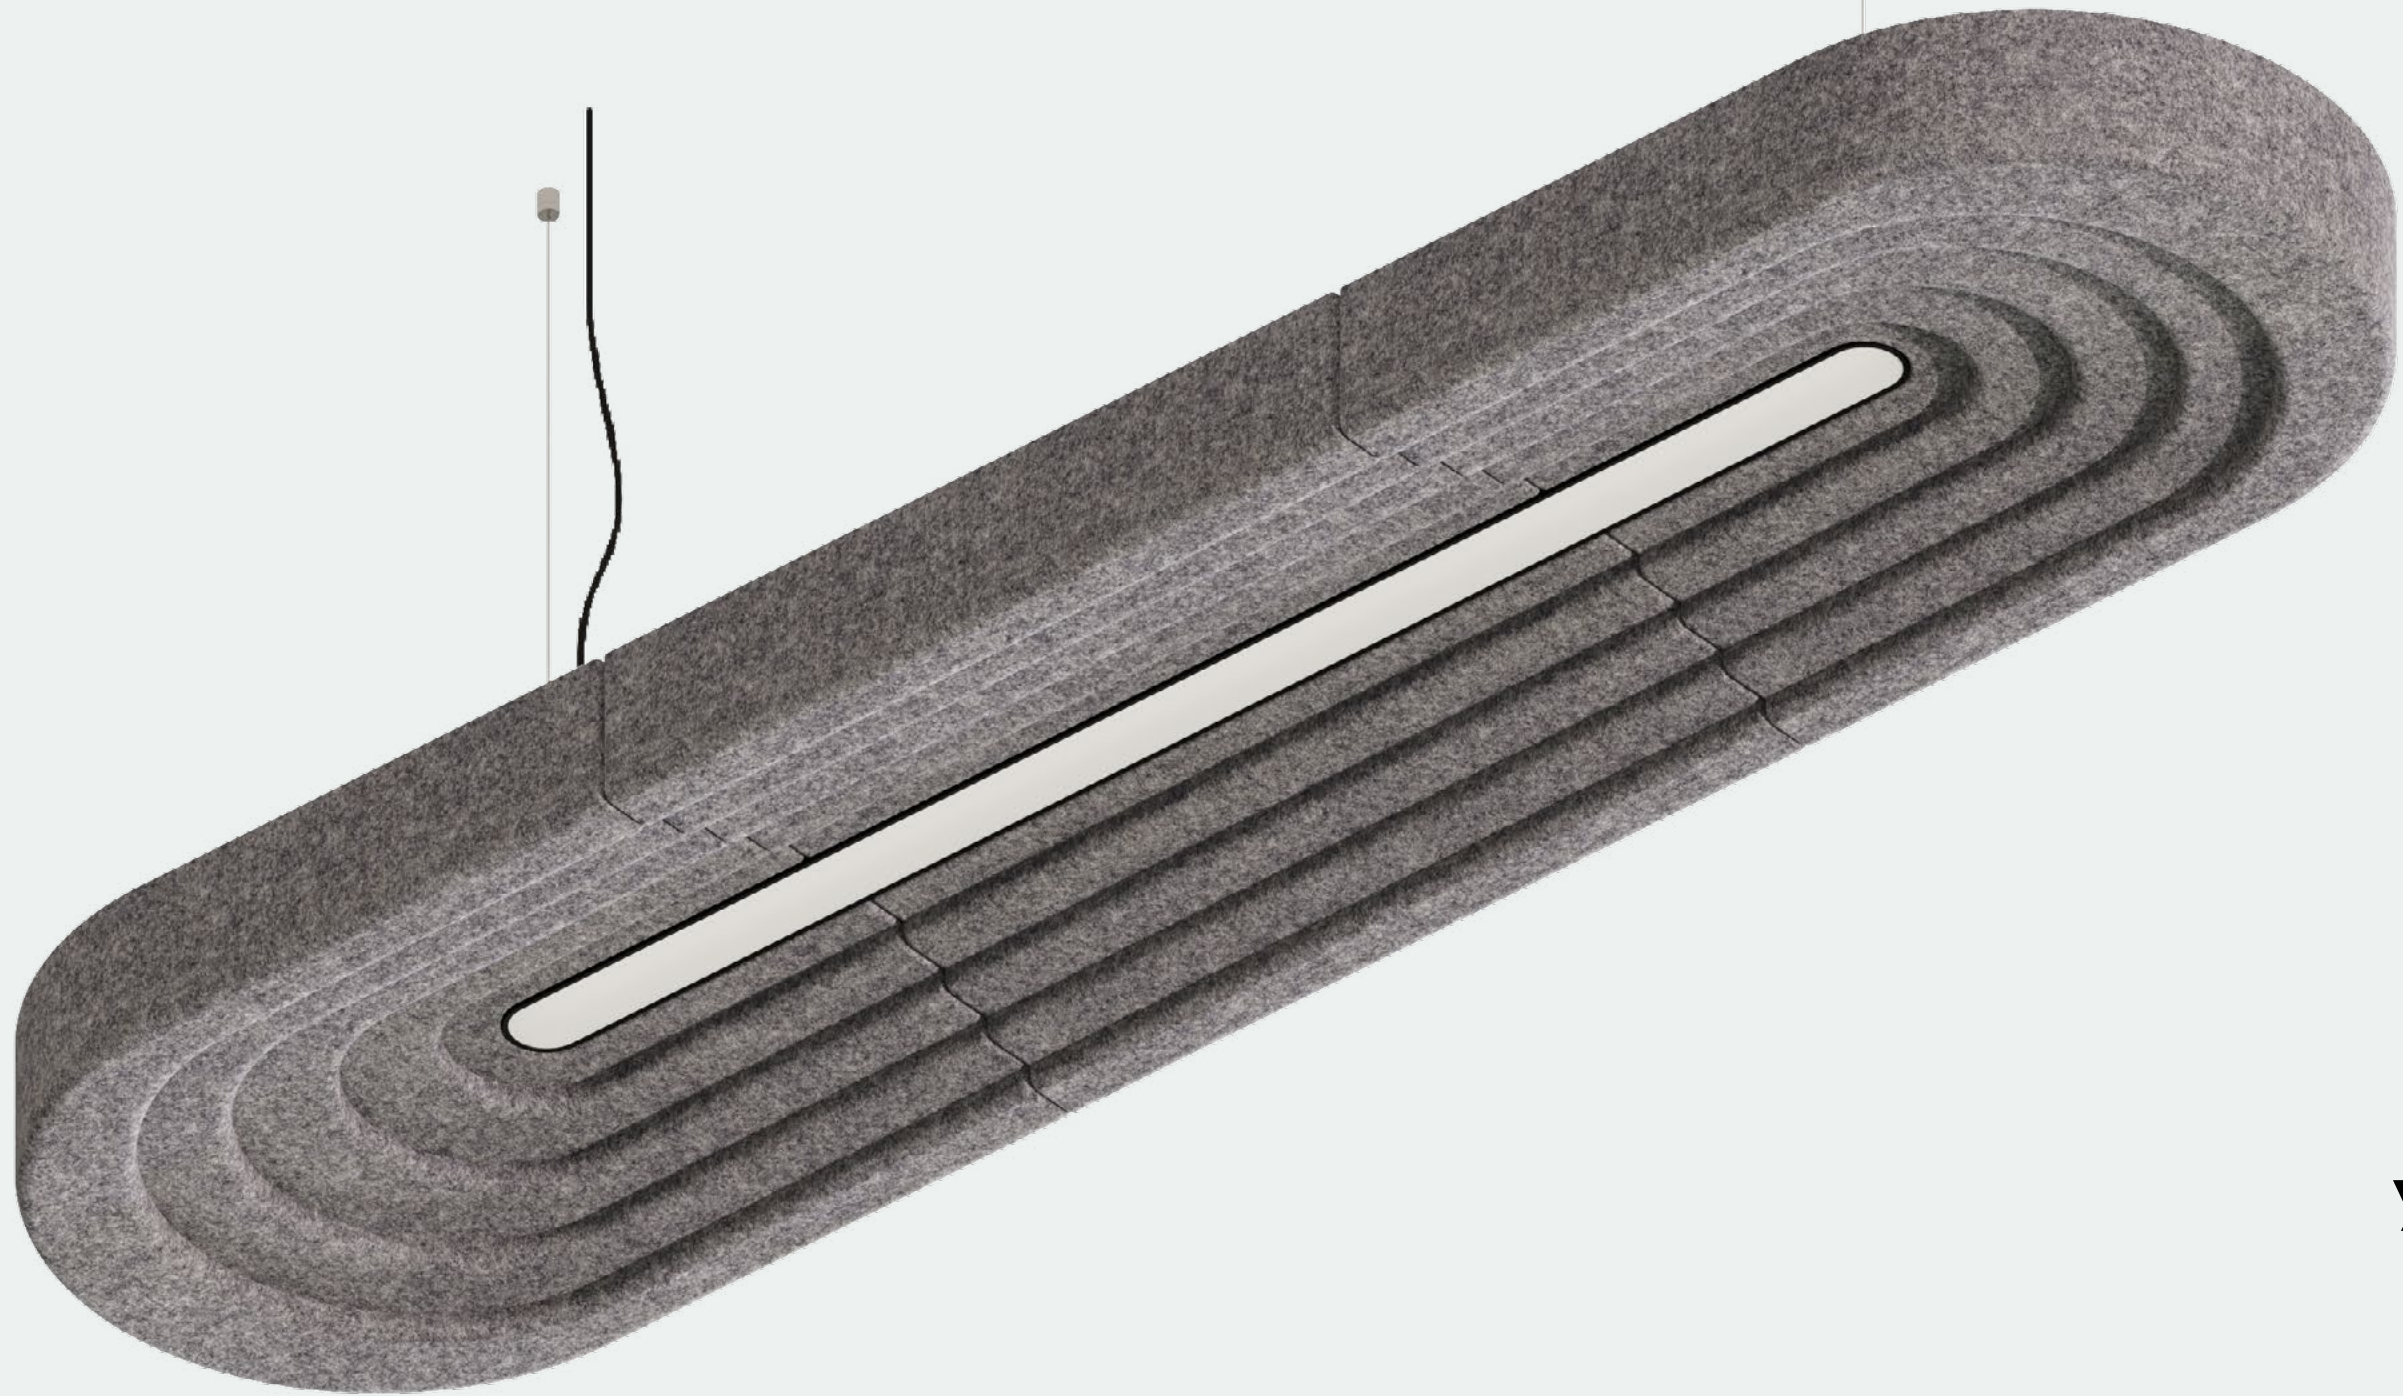

YULA

YULA

GENERAL INFORMATIONS

Body Parameters


MATERIALS
Aluminum luminaire body / Opal, microprismatic diffuser / Feltly Acoustic material.

MOUNTING
Multi-Point suspended luminaire.

Light Parameters

LIGHT SOURCE
LED, Opal or microprismatic diffuser, Direct only.
CRI>80 or CRI>90.

CONTROL
External driver. ON/OFF, DALI, PushDim, Bluetooth.

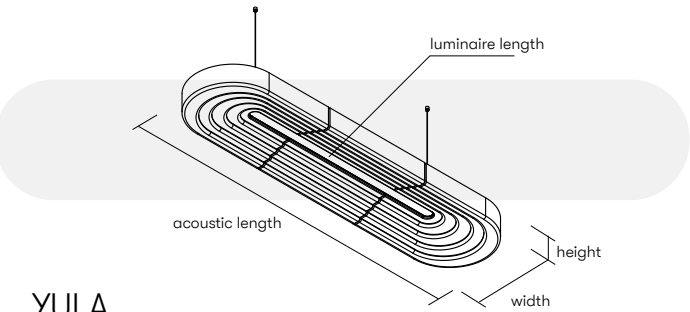


YULA

HEIGHT	● 110 mm	
WIDTH	● 450 mm	
LENGTH	●	●
	ACOUSTIC: 1800 mm	2400 mm
LUMINAIRE:	1130 mm	1730 mm
	26 W / 2730 lm	40 W / 4200 lm

DIFFUSER		COLOR TEMPERATURE	
M	microprismatic	2	2700 K
S	standard (opal)	3	3000 K
L	lenses	4	4000 K
		1	RGBW
		5	Tunable White

CE 220V 240V LEDs 50/60Hz

Lumen values are calculated at 4000K.

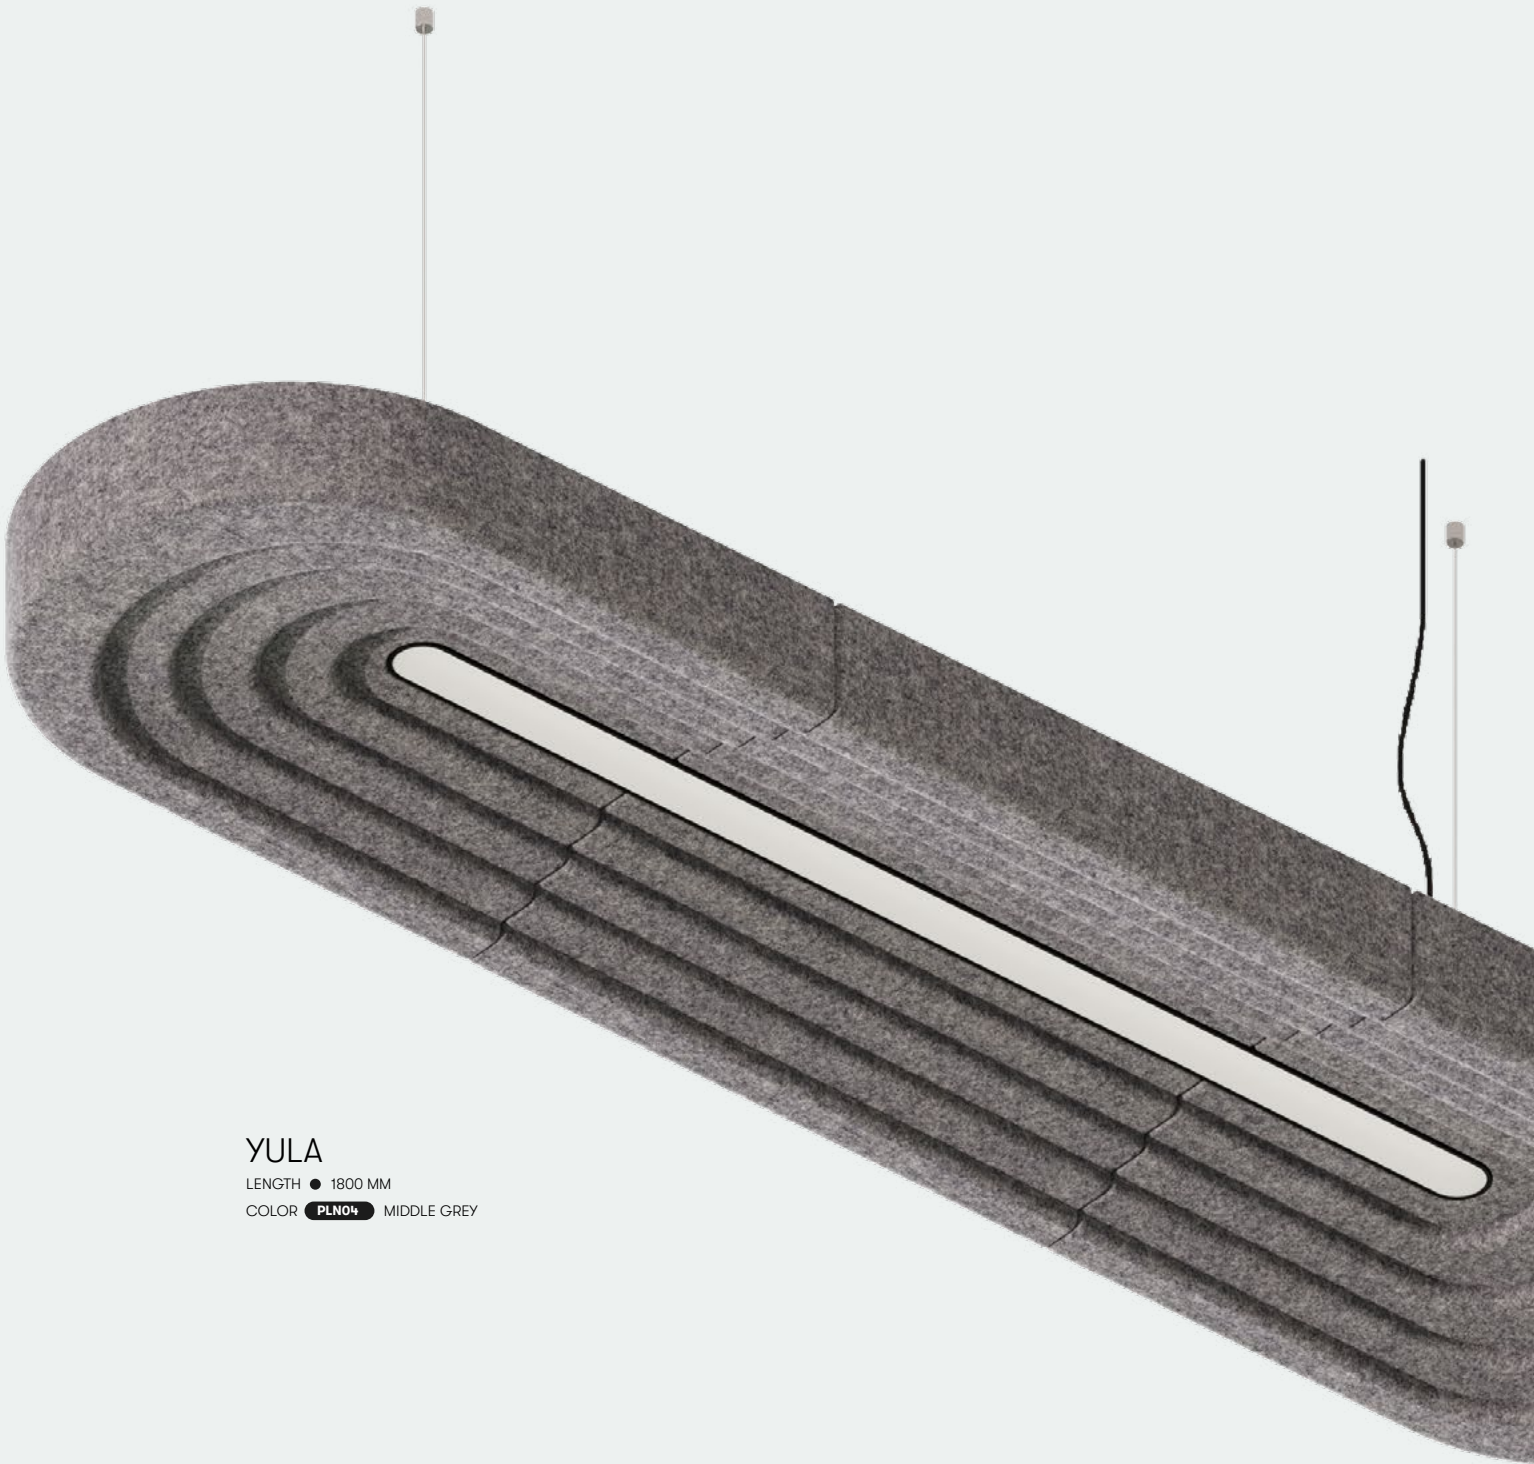

YULA

LENGTH ● 1800 MM
COLOR **PLNO4** MIDDLE GREY

YULA

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material: PET Felt, 50% recycled from plastic bottles

Weight: apx. 1500 g/m²


Thickness: Natural Colors: 6mm or 12mm
Color Selection: 7mm or 13mm

Flammability: EU: EN 13501 / Result 'B-s1,d0'

Light fastness grade: ISO 105 B02:1994 / Result '6+'

Maintenance: Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Feltly Material on catalogue page 16.



FELTLY ACOUSTIC COLORS

(See on page 17)



BODY COLORS





LIGHTING TYPES



MOUNTING TYPES

with external driver

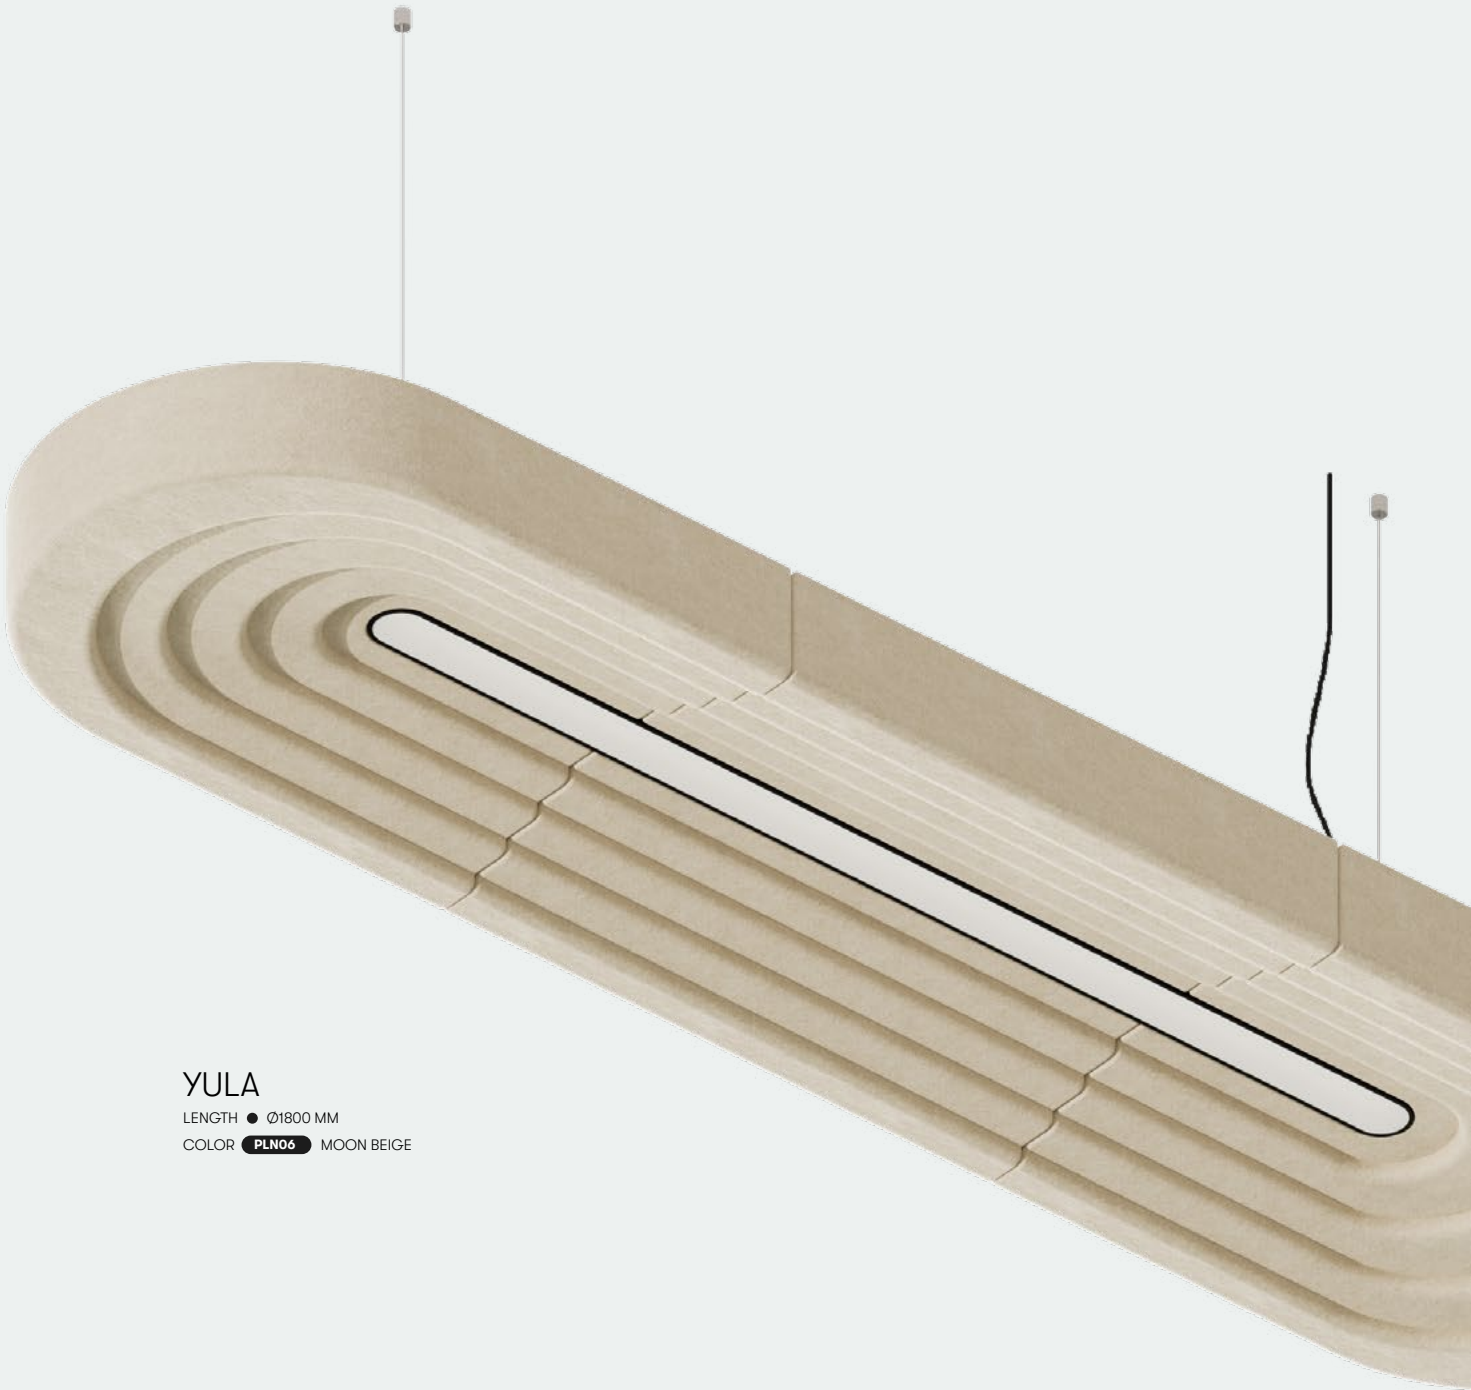

YULA

LENGTH ● Ø1800 MM

COLOR **PLN06** MOON BEIGE



reddot winner 2023



PARASOL



PARASOL



GENERAL INFORMATIONS

Body Parameters


MATERIALS
Aluminum luminaire body / Opal, microprismatic diffuser / Feltly Acoustic material.

MOUNTING
Multi-Point or Single-Point suspended luminaire.

Light Parameters

LIGHT SOURCE
LED, Opal or microprismatic diffuser, Direct only. CRI>80 or CRI>90.

CONTROL
External driver. ON/OFF, DALI, PushDim, Bluetooth.

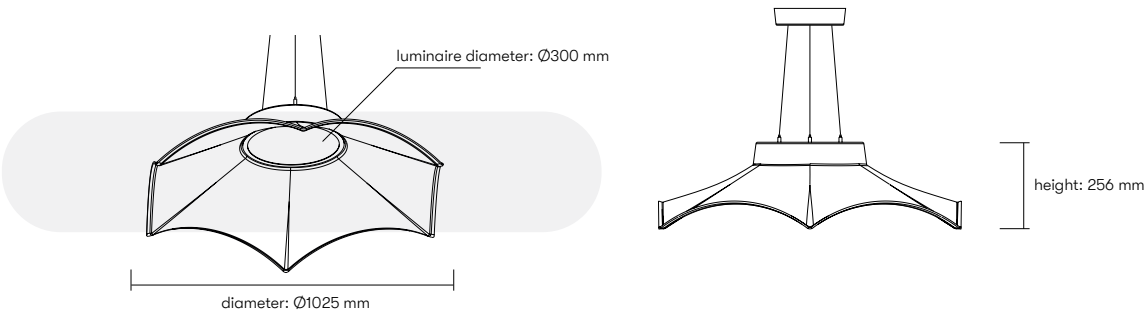

PARASOL

HEIGHT	DIAMETER
● 256 mm	●
ACOUSTIC:	Ø1025 mm
LUMINAIRE:	Ø300 mm
	23 W / 2875 lm

DIFFUSER	COLOR TEMPERATURE
M microprismatic	2 2700 K 1 RGBW
S standard (opal)	3 3000 K 5 Tunable White
L lenses	4 4000 K

CE 220V 240V LEDs 50/60Hz



reddot winner 2023



PARASOL

DIAMETER ● Ø1025 MM
COLOR **PLN04** SPACE GREY

PARASOL

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material:	PET Felt, 50% recycled from plastic bottles
Weight:	apx. 1500 g/m²
Thickness:	Natural Colors: 6mm or 12mm Color Selection: 7mm or 13mm
Flammability:	EU: EN 13501 / Result 'B-s1,d0'
Light fastness grade:	ISO 105 B02:1994 / Result '6+'
Maintenance:	Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Feltly Material on catalogue page 16.



Diffusion



Absorption



Mid Tone



High Tone

FELTLY ACOUSTIC COLORS

(See on page 17)



PLC05



PLC10



PLC12



PLC13



PLC16



PLC22



PLC23



PLC25



PLC17



PLC18



PLN03



PLN01



PLN04



PLN02



PLN06

BODY COLORS



B

Black



G

Grey



A

Anthracite



W

White



RAL

RAL



SPE

Special Colors

LIGHTING TYPES



1

Direct-only



2

Direct-Indirect



3

Indirect-only


MOUNTING TYPES

with external driver




M

Multi-Point
Pendant

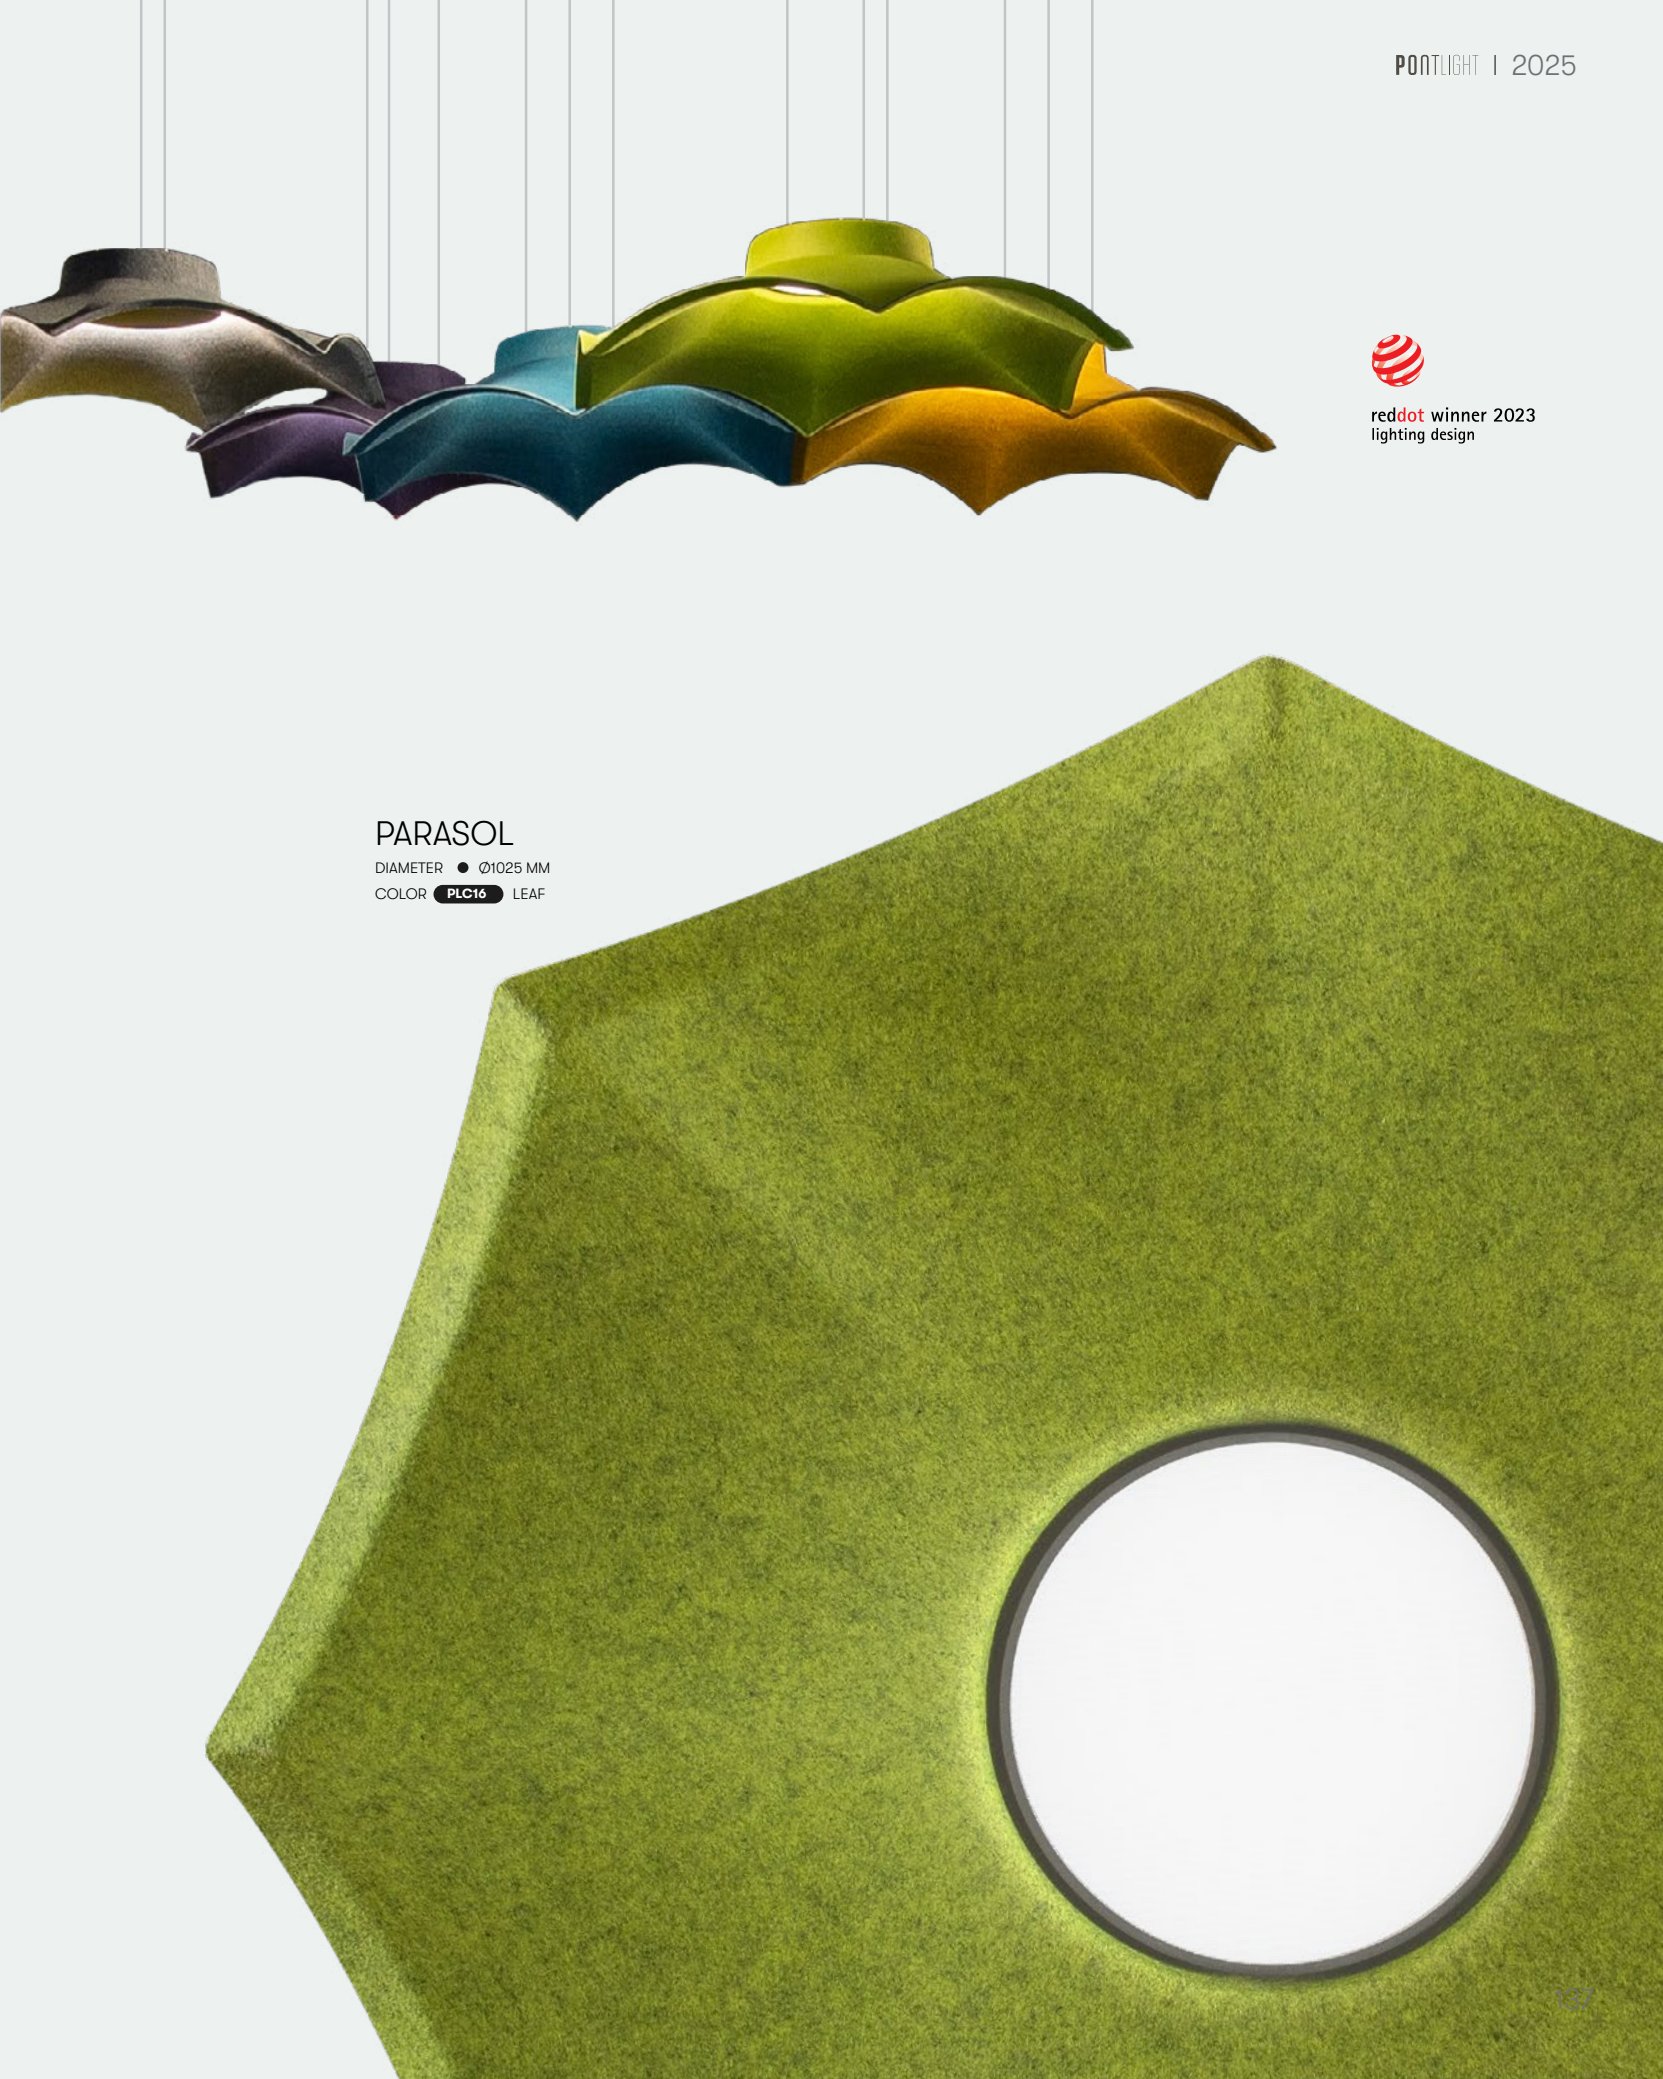

PARASOL
DIAMETER ● Ø1025 MM
COLOR **PLC16** LEAF

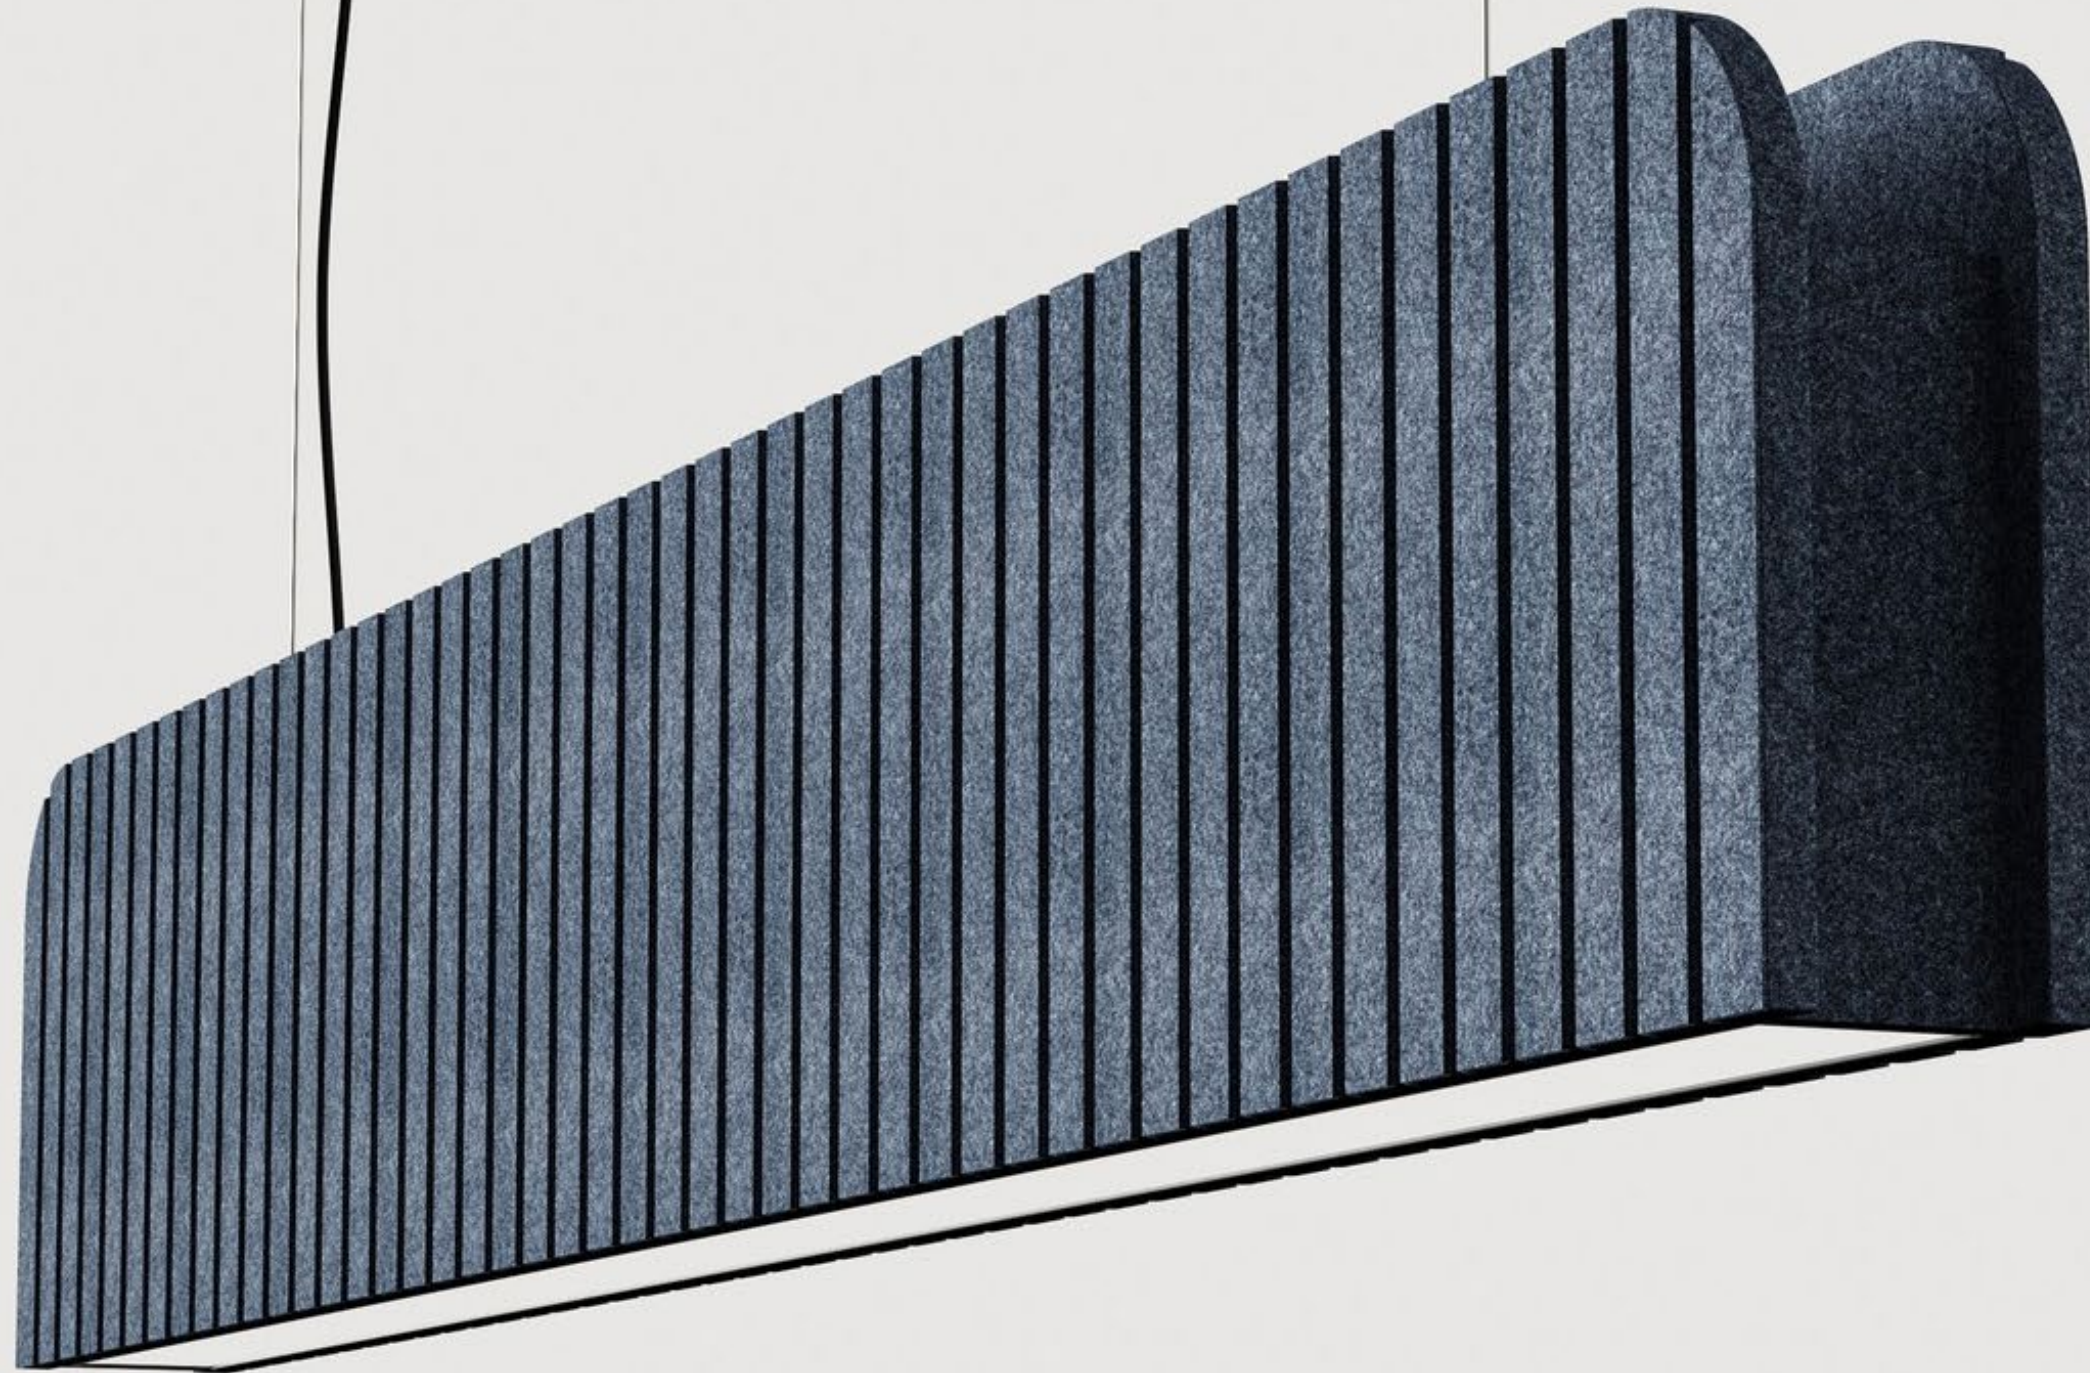

LARA

LARA

GENERAL INFORMATIONS

Body Parameters


MATERIALS
Aluminum luminaire body / Opal, microprismatic diffuser / Feltly Acoustic material.

MOUNTING
Multi-Point suspended luminaire.

Light Parameters

LIGHT SOURCE
LED, Opal or microprismatic diffuser, Direct only or Direct-Indirect. CRI>80 or CRI>90.

CONTROL
ON/OFF, DALI, PushDim, Bluetooth.

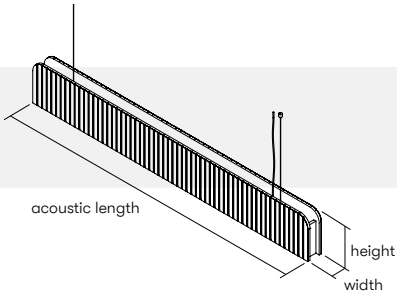


LARA

HEIGHT	LENGTH				
● 200 mm					
WIDTH ● 62 mm	ACOUSTIC:	● 1190 mm	● 1470 mm	● 1750 mm	● 2020 mm
	LUMINAIRE:	1140 mm	1420 mm	1700 mm	1980 mm
	D:	26 W / 2300 lm	32 W / 2890 lm	39 W / 3450 lm	45 W / 4026 lm
	D/I:	39 W / 3450 lm	48 W / 4335 lm	59 W / 5175 lm	68 W / 6039 lm
					● 2310 mm
					2260 mm
					52 W / 4595 lm
					78 W / 6893 lm

DIFFUSER	COLOR TEMPERATURE	
M microprismatic	2 2700 K	1 RGBW
S standard (opal)	3 3000 K	5 Tunable White
L lenses	4 4000 K	

CE 220V 240V LEDs 50/60Hz

Lumen values are calculated at 4000K.

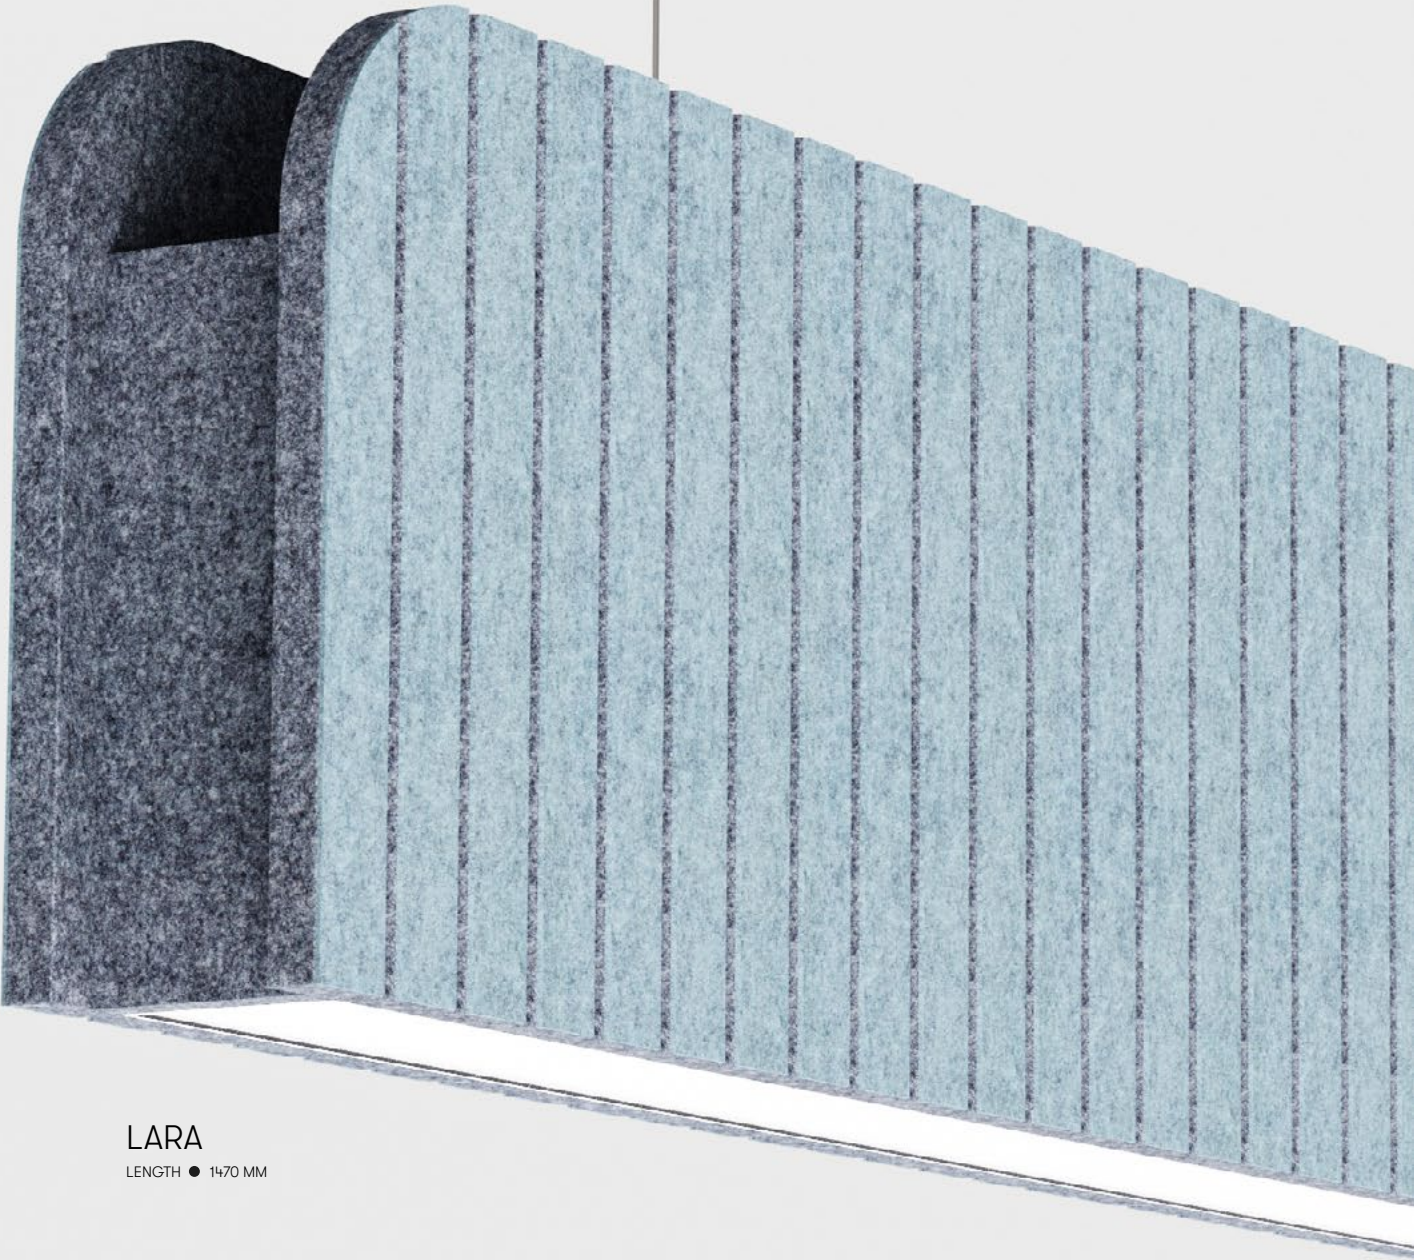

LARA
LENGTH ● 1470 MM

LARA

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material:	PET Felt, 50% recycled from plastic bottles
Weight:	apx. 1500 g/m²
Thickness:	Natural Colors: 6mm or 12mm Color Selection: 7mm or 13mm
Flammability:	EU: EN 13501 / Result 'B-s1,d0'
Light fastness grade:	ISO 105 B02:1994 / Result '6+'
Maintenance:	Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Feltly Material on catalogue page 16.



Low Tone



Mid Tone



High Tone

FELTLY ACOUSTIC COLORS

(See on page 17)



PLC05



PLC10



PLC12



PLC13



PLC16



PLC22



PLC23



PLC25



PLC17



PLC18



PLN03



PLN01



PLN04



PLN02



PLN06

BODY COLORS



B

Black



G

Grey



A

Anthracite



W

White



RAL

R

RAL



SPE

S

Special Colors

LIGHTING TYPES



1

Direct-only



2

Direct-Indirect



3


Indirect-only

MOUNTING TYPES



M

Multi-Point
Pendant

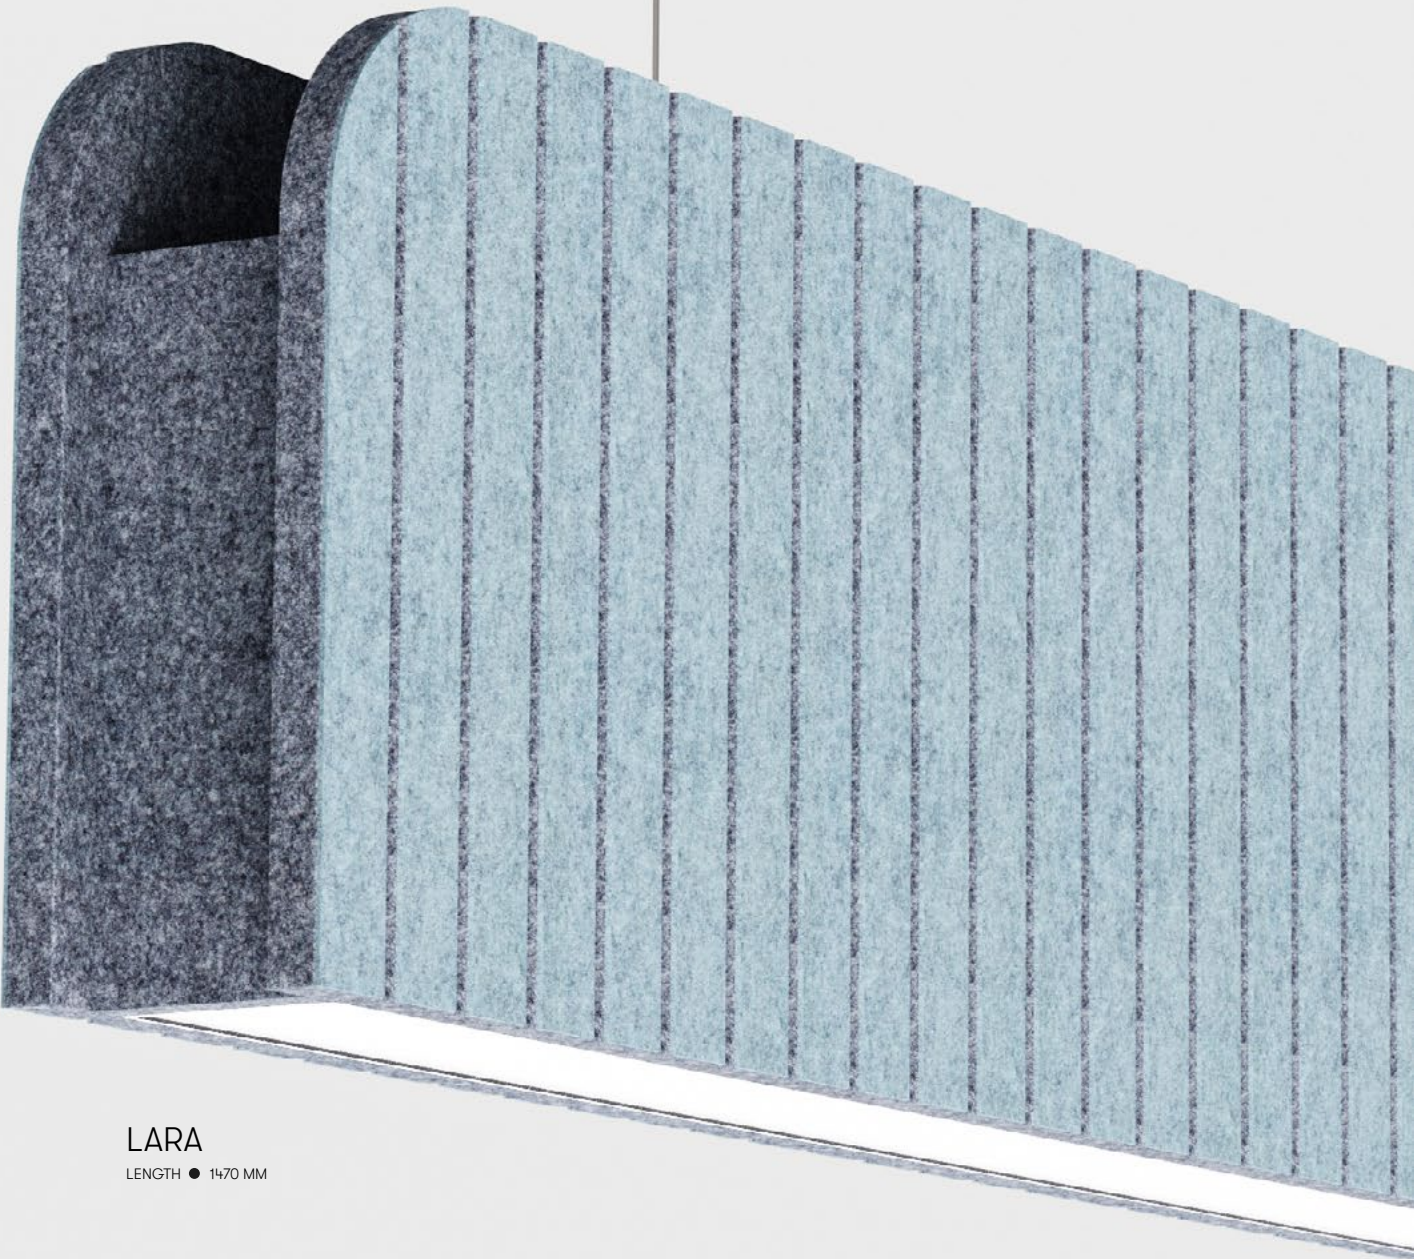

LARA
LENGTH ● 1470 MM



OLIVE

OLIVE

GENERAL INFORMATIONS

Body Parameters

MATERIALS

Aluminum luminaire body / Opal, microprismatic diffuser / Feltly Acoustic material.

MOUNTING

Multi-Point or Single-Point suspended luminaire.


Light Parameters

LIGHT SOURCE

LED, Opal or microprismatic diffuser, Direct only or Direct-Indirect. CRI>80 or CRI>90.

CONTROL


ON/OFF, DALI, PushDim, Bluetooth.



OLIVE 20

HEIGHT	DIAMETERS		
● 200 mm	● Ø800 mm	● Ø1000 mm	● Ø1200 mm
PROFILE WIDTH	D: 58 W / 6496 lm	72 W / 8064 lm	87 W / 9744 lm
● 100 mm	D/I: 87 W / 9744 lm	108 W / 12069 lm	130 W / 14616 lm

DIFFUSER	COLOR TEMPERATURE		
● M microprismatic	● 2 2700 K	● 1 RGBW	
● S standard (opal)	● 3 3000 K	● 5 Tunable White	
● L lenses	● 4 4000 K		



OLIVE 30

HEIGHT	DIAMETERS		
● 300 mm	● Ø800 mm	● Ø1000 mm	● Ø1200 mm
PROFILE WIDTH	D: 58 W / 6496 lm	72 W / 8064 lm	87 W / 9744 lm
● 100 mm	D/I: 87 W / 9744 lm	108 W / 12069 lm	130 W / 14616 lm

DIFFUSER	COLOR TEMPERATURE		
● M microprismatic	● 2 2700 K	● 1 RGBW	
● S standard (opal)	● 3 3000 K	● 5 Tunable White	
● L lenses	● 4 4000 K		



OLIVE 30

DIAMETER ● Ø1000 MM
COLOR ● **PLN02** LIGHT GREY

OLIVE 20

DIAMETER ● Ø800 MM
COLOR ● **PLN01** SPACE GREY

OLIVE ACOUSTIC SPECIFIC DATA

ACOUSTIC PARAMETERS

Material:	PET Felt, 50% recycled from plastic bottles
Weight:	apx. 1500 g/m²
Thickness:	Natural Colors: 6mm or 12mm Color Selection: 7mm or 13mm
Flammability:	EU: EN 13501 / Result "B-s1,d0"
Light fastness grade:	ISO 105 B02:1994 / Result "6+"
Maintenance:	Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Feltly Material on catalogue page 16.



Absorption



Attenuation



Mid Tone



High Tone

FELTLY ACOUSTIC COLORS (See on page 17)



PLC05



PLC10



PLC12



PLC13



PLC16



PLC22



PLC23



PLC25



PLC17



PLC18



PLN03



PLN01



PLN04



PLN02



PLN06

BODY COLORS



B

Black



G

Grey



A

Anthracite



W

White



RAL

RAL



SPE

Special Colors

LIGHTING TYPES



1

Direct-only



2

Direct-Indirect



3

Indirect-only

MOUNTING TYPES



M

Multi-Point
Pendant





P

Single-Point
Pendant

OLIVE 30
DIAMETER ● Ø1200 MM
COLOR **PLN01** SPACE GREY

OLIVE 20
DIAMETER ● Ø800 MM
COLOR **PLN02** LIGHT GREY

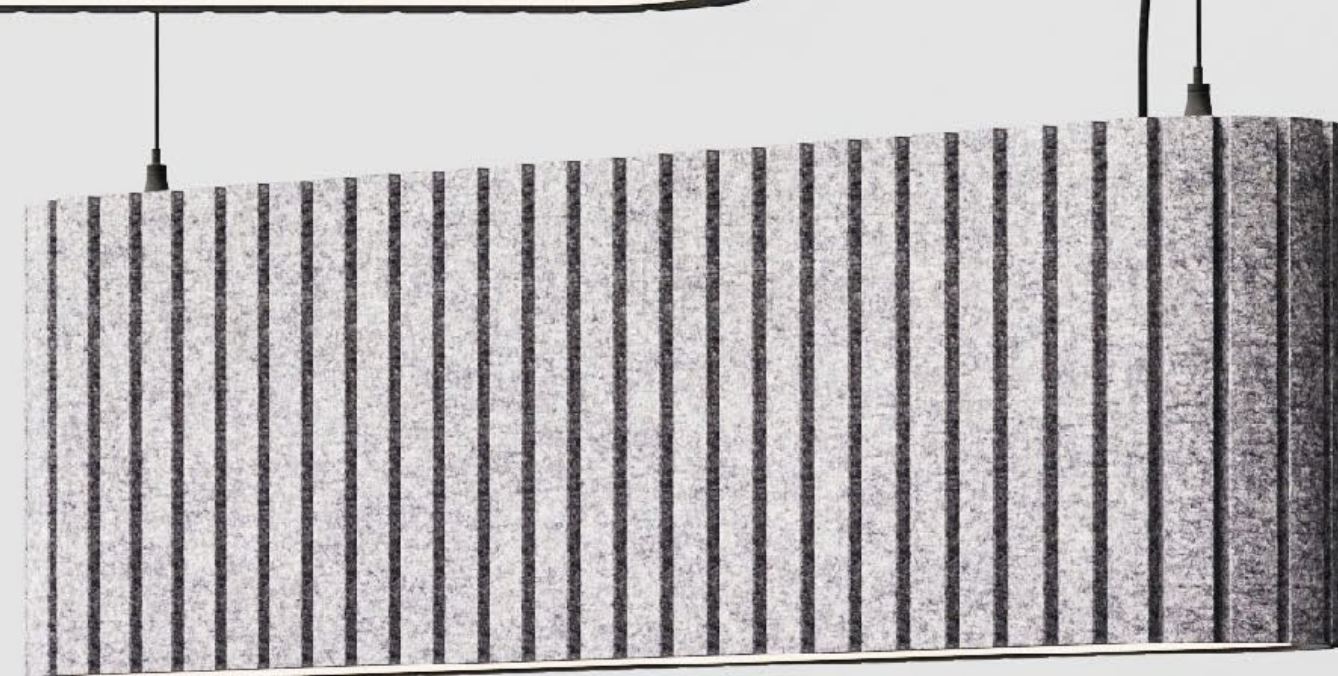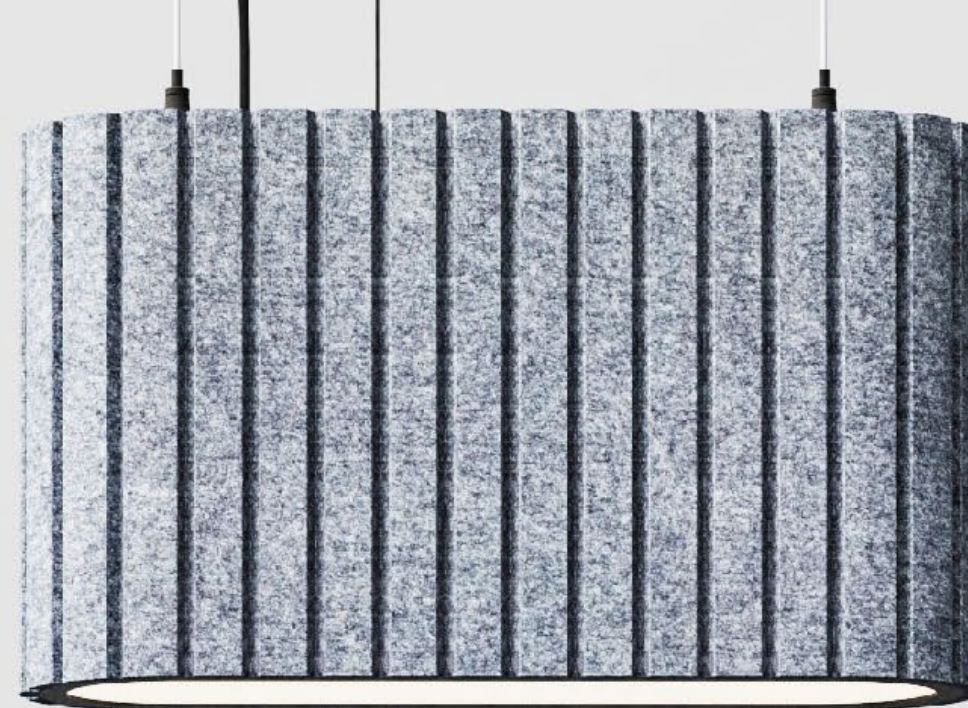

LIVIA

LIVIA

GENERAL INFORMATION

Body Parameters

MATERIALS

Aluminum luminaire body / Opal, microprismatic diffuser / Feltly Acoustic material.

MOUNTING

Multi-Point or Single-Point suspended luminaire.


Light Parameters

LIGHT SOURCE

LED, Opal or microprismatic diffuser, Direct only or Direct-Indirect. CRI>80 or CRI>90.

CONTROL


ON/OFF, DALI, PushDim,Bluetooth.

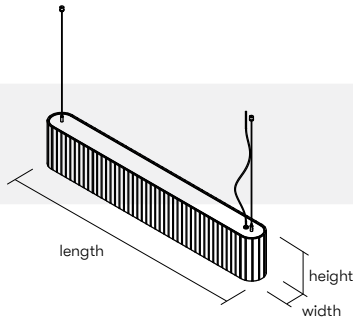

LIVIA S

HEIGHT	LENGTH		
	● 200 mm	● 597 mm	● 1432 mm
WIDTH	● 100 mm	D: 13 W / 1538 lm D/I: 19 W / 2307 lm	33 W / 3689 lm 49 W / 5533 lm
			39 W / 4410 lm 58 W / 6615 lm


DIFFUSER	COLOR TEMPERATURE	
M microprismatic	2 2700 K	1 RGBW
S standard (opal)	3 3000 K	5 Tunable White
L lenses	4 4000 K	

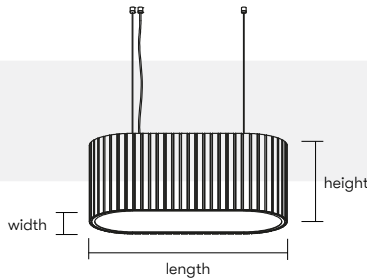

LIVIA M

HEIGHT	LENGTH		
	● 200 mm	● 502 mm	● 640 mm
WIDTH	● 200 mm	D: 20 W / 2200 lm D/I: 28 W / 3300 lm	30 W / 3300 lm 49 W / 4950 lm
			40 W / 4400 lm 58 W / 6600 lm

DIFFUSER	COLOR TEMPERATURE	
M microprismatic	2 2700 K	1 RGBW
S standard (opal)	3 3000 K	5 Tunable White
L lenses	4 4000 K	

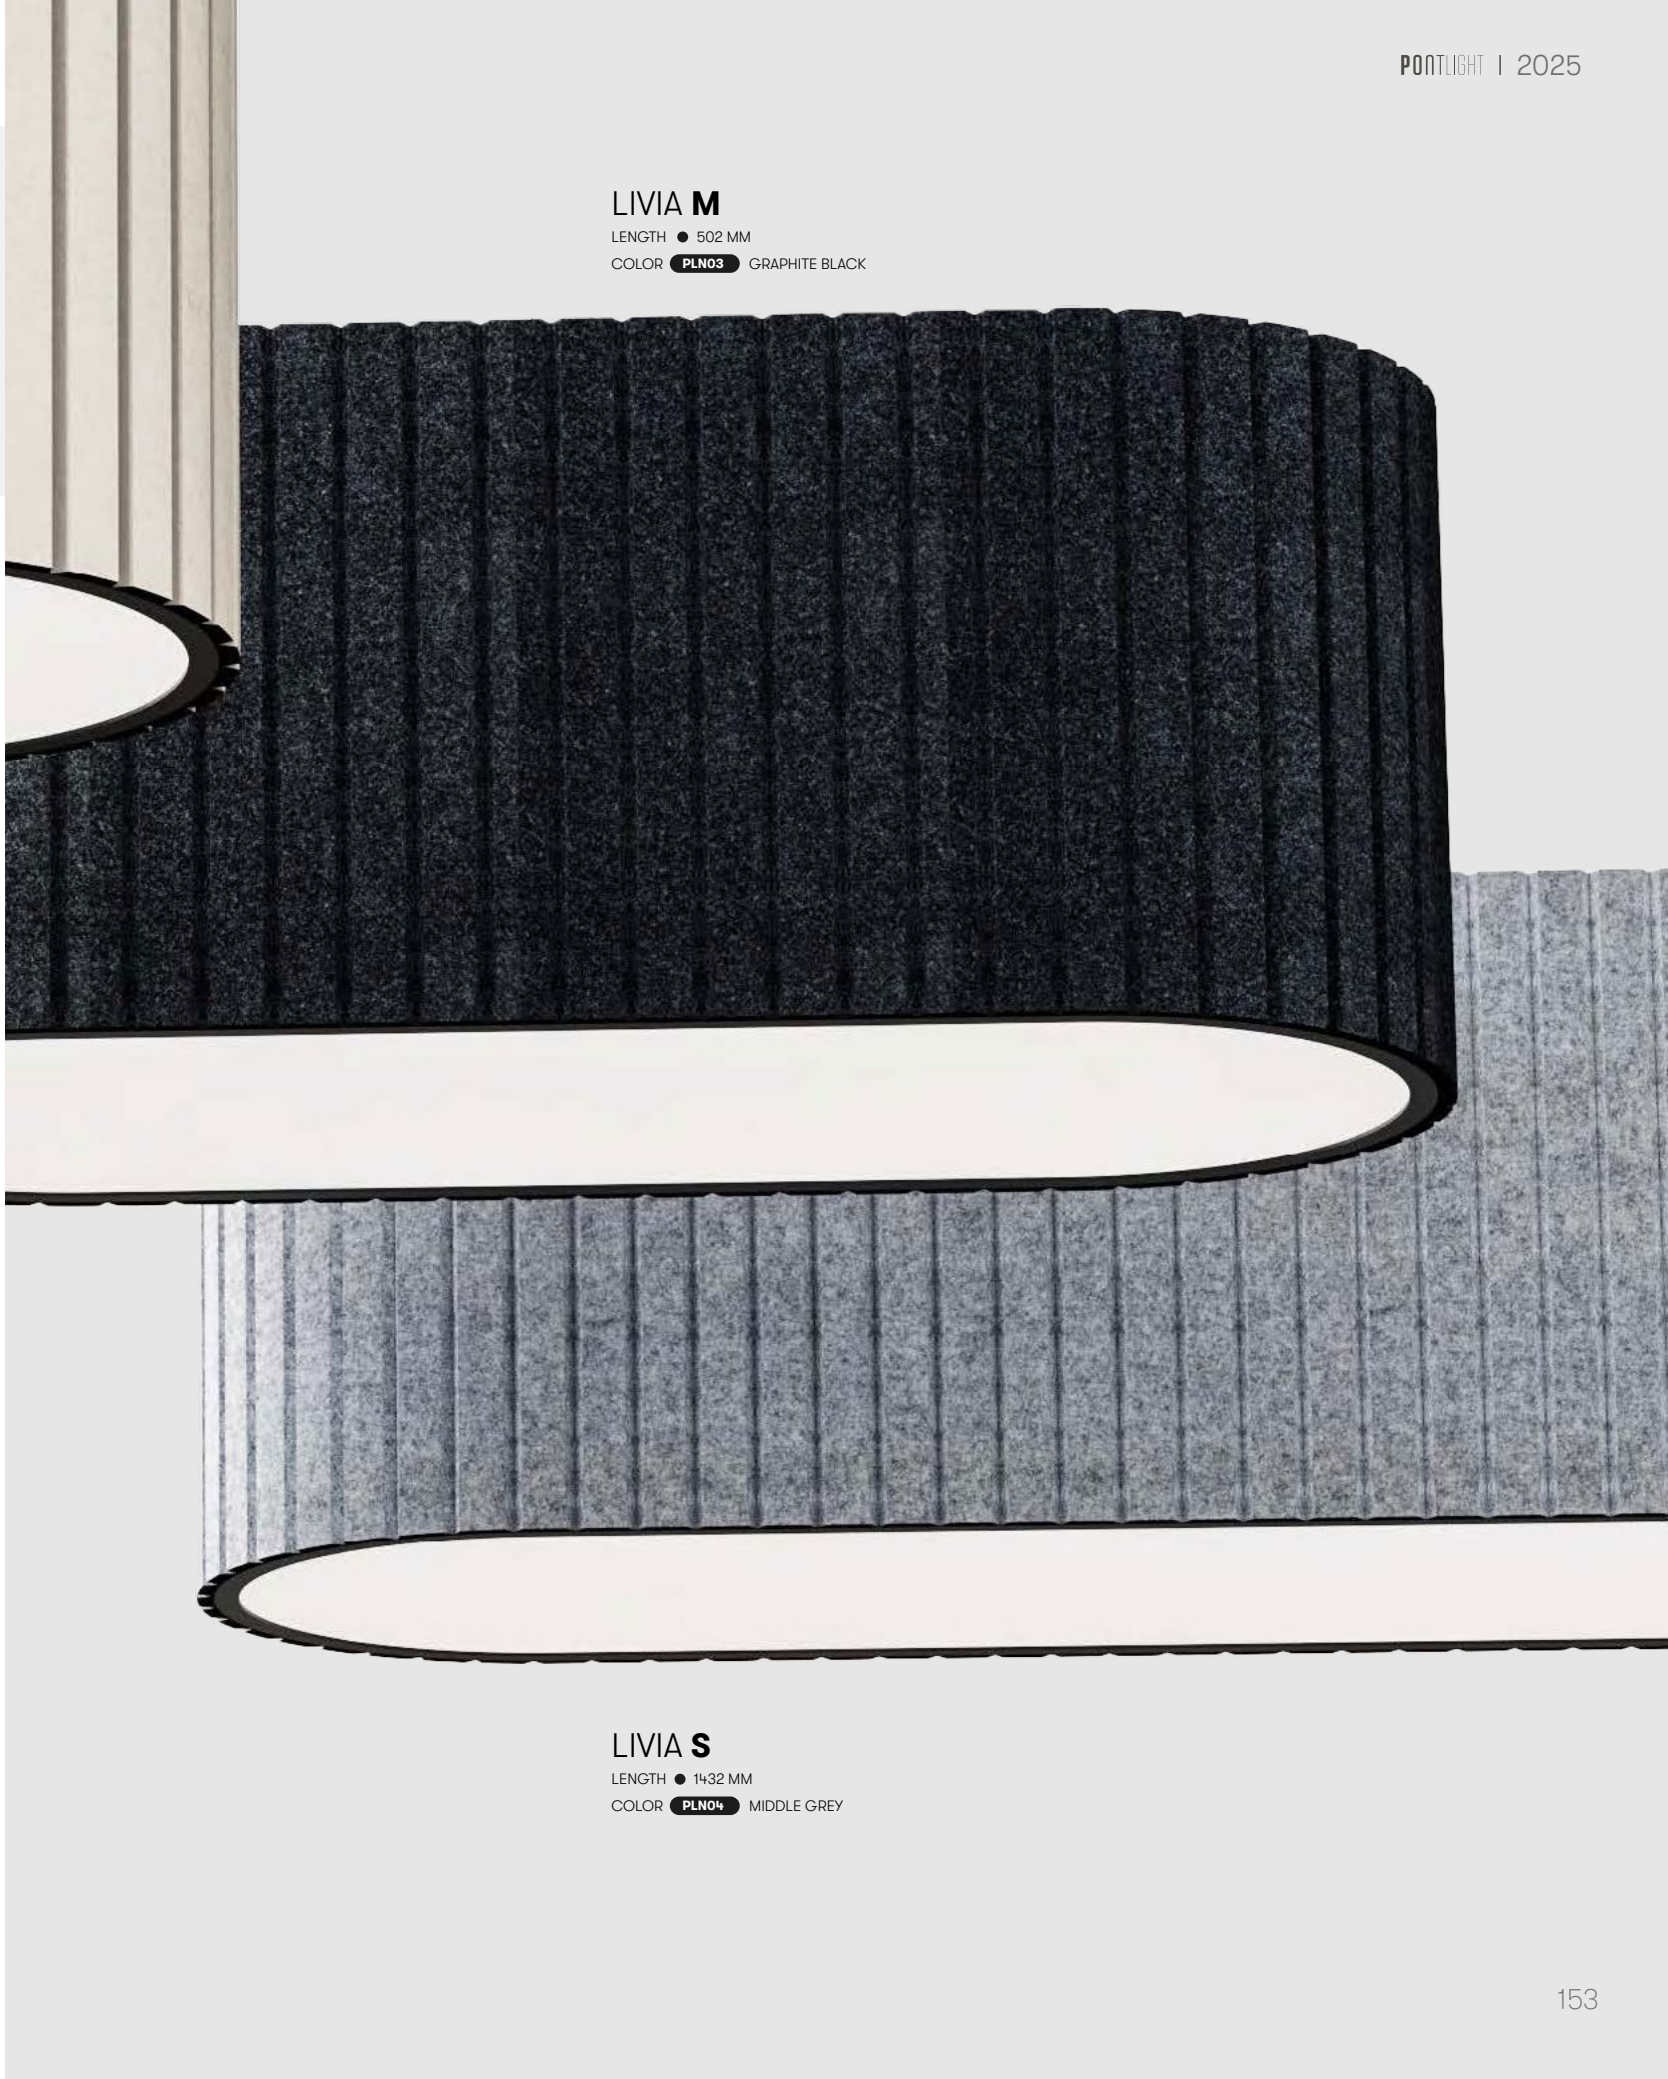

LIVIA M

LENGTH ● 502 MM
COLOR **PLN03** GRAPHITE BLACK

LIVIA S

LENGTH ● 1432 MM
COLOR **PLN04** MIDDLE GREY

LIVIA ACOUSTIC SPECIFIC DATA

ACOUSTIC PARAMETERS

Material:	PET Felt, 50% recycled from plastic bottles
Weight:	apx. 1500 g/m²
Thickness:	Natural Colors: 6mm or 12mm Color Selection: 7mm or 13mm
Flammability:	EU: EN 13501 / Result "B-s1,d0"
Light fastness grade:	ISO 105 B02:1994 / Result "6+"
Maintenance:	Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Feltly Material on catalogue page 16.



Low Tone



Mid Tone



High Tone

FELTLY ACOUSTIC COLORS (See on page 17)



PLC05



PLC10



PLC12



PLC13



PLC16



PLC22



PLC23



PLC25



PLC17



PLC18



PLN03



PLN01



PLN04



PLN02



PLN06

BODY COLORS



B

Black



G

Grey



A

Anthracite



W

White



RAL

R

RAL



SPE

S

Special Colors

LIGHTING TYPES



1

Direct-only



2

Direct-Indirect



3

Indirect-only

MOUNTING TYPES



M

Multi-Point
Pendant





RIVA



RIVA

GENERAL INFORMATIONS

Body Parameters

MATERIALS

Aluminum luminaire body / Opal, microprismatic diffuser / Feltly Acoustic material.

MOUNTING

Multi-Point or Single-Point suspended luminaire.


Light Parameters

LIGHT SOURCE

LED, Opal or microprismatic diffuser, Direct only or Direct-Indirect. CRI>80 or CRI>90.

CONTROL


ON/OFF, DALI, PushDim, Bluetooth.



RIVA 20

HEIGHT	DIAMETERS		
● 200 mm	● Ø600 mm	● Ø800 mm	● Ø1000 mm
D:	60 W / 7500 lm	80 W / 10000 lm	100 W / 12500 lm
D/I:	90 W / 11250 lm	120 W / 15000 lm	150 W / 18750 lm

DIFFUSER	COLOR TEMPERATURE	
● M microprismatic	● 2 2700 K	● 1 RGBW
● S standard (opal)	● 3 3000 K	● 5 Tunable White
● L lenses	● 4 4000 K	



RIVA 30

HEIGHT	DIAMETERS		
● 300 mm	● Ø600 mm	● Ø800 mm	● Ø1000 mm
D:	60 W / 7500 lm	80 W / 10000 lm	100 W / 12500 lm
D/I:	90 W / 11250 lm	120 W / 15000 lm	150 W / 18750 lm

DIFFUSER	COLOR TEMPERATURE	
● M microprismatic	● 2 2700 K	● 1 RGBW
● S standard (opal)	● 3 3000 K	● 5 Tunable White
● L lenses	● 4 4000 K	



RIVA 20

DIAMETER ● Ø600 MM
COLOR ● **PLN03** GRAPHITE BLACK

RIVA 20

DIAMETER ● Ø1000 MM
COLOR ● **PLN01** SPACE GREY


RIVA ACOUSTIC

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material:	PET Felt, 50% recycled from plastic bottles
Weight:	apx. 1500 g/m²
Thickness:	Natural Colors: 6mm or 12mm Color Selection: 7mm or 13mm
Flammability:	EU: EN 13501 / Result 'B-s1,d0'
Light fastness grade:	ISO 105 B02:1994 / Result '6+
Maintenance:	Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Feltly Material on catalogue page 16.



FELTLY ACOUSTIC COLORS


(See on page 17)




BODY COLORS



LIGHTING TYPES

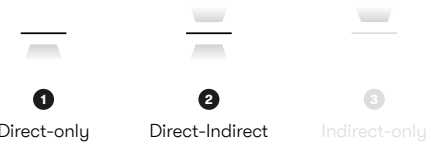

MOUNTING TYPES



RIVA 20

DIAMETER ● Ø600 MM
COLOR **PLN03** GRAPHITE BLACK

RIVA 20

DIAMETER ● Ø1000 MM
COLOR **PLN01** SPACE GREY



RIVA SLIM



RIVA SLIM

GENERAL INFORMATION

Body Parameters

MATERIALS

Aluminum luminaire body / Opal, microprismatic diffuser / Feltly Acoustic material.

MOUNTING

Multi-Point or Single-Point suspended luminaire.


Light Parameters

LIGHT SOURCE

LED, Opal or microprismatic diffuser, Direct only or Direct/Indirect. CRI>80 or CRI>90.

CONTROL

ON/OFF, DALI, PushDim, Bluetooth.



RIVA SLIM

HEIGHT	DIAMETER		
	● 200 mm	●	●
	Ø600 mm	Ø800 mm	Ø1000 mm
D:	60 W/ 7500 lm	80 W/ 10000 lm	100 W/ 12500 lm
D/I:	90 W/ 11500 lm	120 W/ 15000 lm	150 W/ 18750 lm

DIFFUSER	COLOR TEMPERATURE	
M microprismatic	2 2700 K	1 RGBW
S standard (opal)	3 3000 K	5 Tunable White
L lenses	4 4000 K	



RIVA SLIM

DIAMETER ● Ø600 mm
COLOR **PLN02** LIGHT GREY

RIVA SLIM

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material:	PET Felt, 50% recycled from plastic bottles
Weight:	apx. 1500 g/m²
Thickness:	Natural Colors: 6mm or 12mm Color Selection: 7mm or 13mm
Flammability:	EU: EN 13501 / Result "B-s1,d0"
Light fastness grade:	ISO 105 B02:1994 / Result "6+"
Maintenance:	Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Feltly Material on catalogue page 16.



Diffusion



Absorption



Low Tone



Mid Tone



High Tone

LIGHTING TYPES



1
Direct-only



2
Direct-Indirect



3
Indirect-only

FELTLY ACOUSTIC COLORS

(See on page 17)

 PLC05	 PLC10	 PLC12	 PLC13	 PLC16
 PLC22	 PLC23	 PLC25	 PLC17	 PLC18
 PLN03	 PLN01	 PLN04	 PLN02	 PLN06

BODY COLORS

 B	 G	 A	 W	 RAL	 SPE
Black	Grey	Anthracite	White	RAL	Special Colors

MOUNTING TYPES



M
Multi-Point
Pendant



P
Single-Point
Pendant




T
Tube
Pendant





ANETA

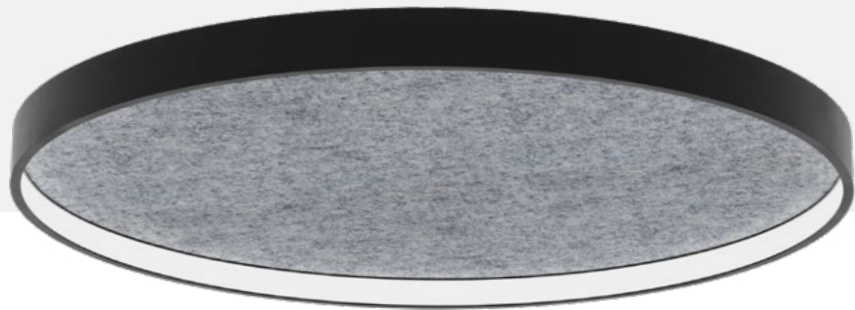

ANETA

GENERAL INFORMATIONS

Body Parameters


MATERIALS
Aluminum luminaire body / Opal diffuser
/ Feltly Acoustic material.

MOUNTING
Multi-Point or Single-Point suspended
luminaire.

Light Parameters

LIGHT SOURCE
LED, Opal, Direct only. CRI>80 or CRI>90.

CONTROL
External driver. ON/OFF, DALI, PushDim,
Bluetooth.

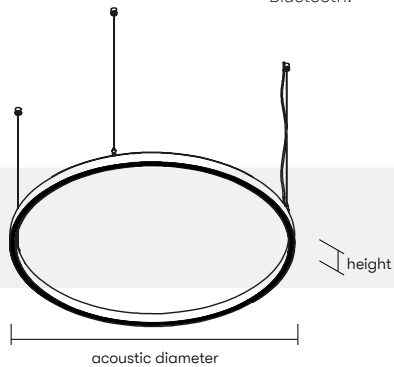

ANETA

HEIGHT	● 88 mm			
PROFILE	● 15 mm			
WIDTH	● 88 mm			
DIAMETER	●	●	●	●
	Ø800 mm	Ø1000mm	Ø1200mm	Ø1400 mm
	45 W / 3600 lm	55 W / 4400 lm	67 W / 5360 lm	80 W / 6400 lm


DIFFUSER	COLOR TEMPERATURE	
1 microprismatic	2 2700 K	1 RGBW
3 standard (opal)	3 3000 K	5 Tunable White
4 lenses	4 4000 K	

CE 220V 240V LEDs 50/60Hz


Lumen values are calculated at 4000K.




ANETA
DIAMETER ● Ø800 MM
COLOR **PLC25** PUMPKIN

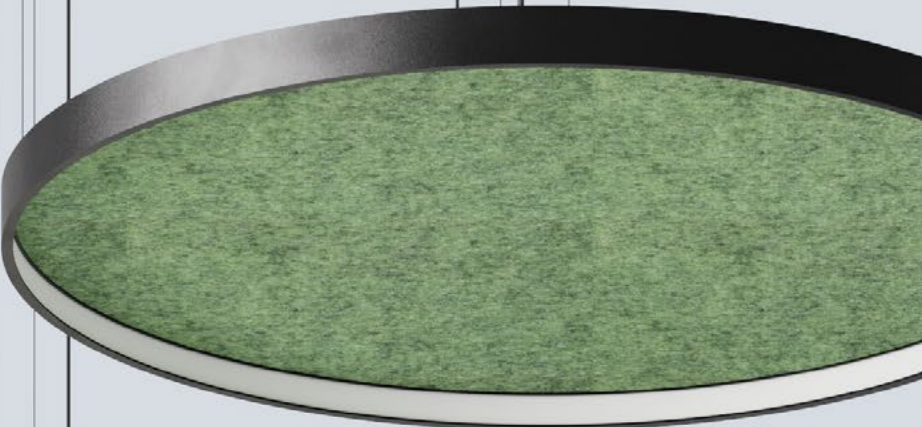

ANETA
DIAMETER ● Ø1200 MM
COLOR **PLC13** OXLEY

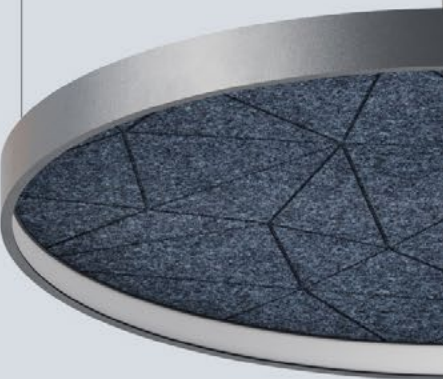

ANETA
DIAMETER ● Ø1000 MM
COLOR **PLN01** SPACE GREY

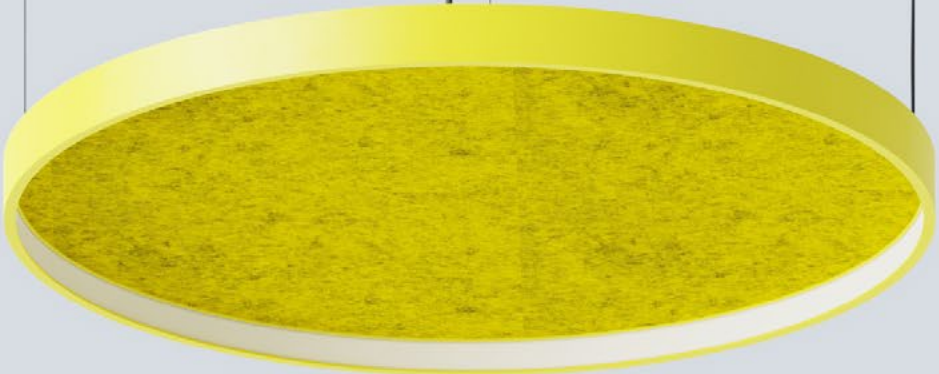

ANETA
DIAMETER ● Ø1000 MM
COLOR **PLC18** LEMON

ANETA

SPECIFIC DATA

ACOUSTIC PARAMETERS

Material:	PET Felt, 50% recycled from plastic bottles
Weight:	apx. 1500 g/m²
Thickness:	Natural Colors: 6mm or 12mm Color Selection: 7mm or 13mm
Flammability:	EU: EN 13501 / Result 'B-s1,d0'
Light fastness grade:	ISO 105 B02:1994 / Result '6+'
Maintenance:	Indoor use only. Cleaning methods: Vacuum regularly. Wipe clean with a damp cloth. Professionally dry clean. Bleach cleanable (only natural colors).

More information about Feltly Material on catalogue page 16.



Diffusion



Absorption



Mid Tone



High Tone

LIGHTING TYPES



1
Direct-only



2
Direct-Indirect



3
Indirect-only

MOUNTING TYPES

with external driver



M
Multi-Point
Pendant



P
Single-Point
Pendant

FELTLY ACOUSTIC COLORS

(See on page 17)



PLC05



PLC10



PLC12



PLC13



PLC16



PLC22



PLC23



PLC25



PLC17



PLC18



PLN03



PLN01



PLN04



PLN02



PLN06

BODY COLORS



B
Black



G
Grey



A
Anthracite



W
White




RAL
RAL





SPE
Special Colors


PATTERNS

V-Cut technology. Please consult with us.









ANETA
DIAMETER ● Ø1200 MM
COLOR **PLN06** MOON BEIGE

ANETA
DIAMETER ● Ø800 MM
COLOR **PLN02** LIGHT GREY

Acoustic Catalogue

by

 PONTLIGHT

DESIGNED WITH YOU

